


SECTION B-B

SECTION A-A

| GENERAL TOLERANCE (HOUSING) | | | | | | | USED ON |
|-----------------------------|-------|--------|--------|-------|-------|--------|---------|
| 10MAX | 50MAX | 100MAX | 250MAX | 250VR | ANGLE | ECCENT | |
| ±0.2 | ±0.3 | ±0.55 | ±0.95 | ±1.4 | ±30' | 0.1 | |

| NO. | MATERIAL | COLOR |
|-----|----------|-------------|
| * 0 | P B T | NATURAL |
| 1 | | RED |
| 2 | | BLUE |
| 3 | | YELLOW |
| * 4 | | GRAY |
| 40 | | DARK GRAY |
| 41 | | LIGHT GRAY |
| * 5 | | BLACK |
| 6 | | DARK GREEN |
| 7 | | BROWN |
| 8 | | LIGHT GREEN |
| 9 | | MAGENTA |
| 11 | | ORANGE |

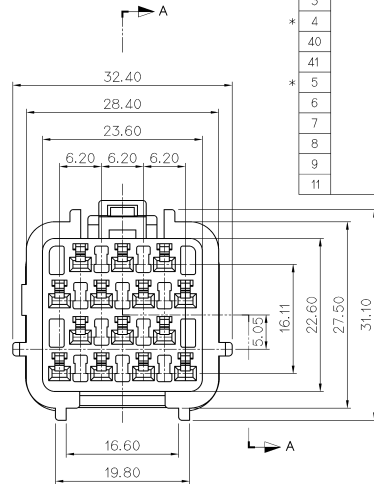

주 기

1. 제품기능상 유해한 BURR, 변형 및 WELDLINE 등이 없을것.
2. 적용 TERMINAL : ST730495, 496
3. 적용 HOUSING : MG640352
4. 적용 REAR HOLDER : MG630353



ISSUE MARK

| | | | | | |
|-------------------------|------|-----------|------------|-----------|-----------------------------------|
| △ 도면 변경에 따른 재작업 | LMK | 05.06.02 | MATERIAL | SEE TABLE | KOREA ELECTRIC TERMINAL CO., LTD. |
| △ REWORK: 관련 형상 추가 (2차) | JK | '96.11.28 | FINISH | SEE TABLE | |
| R/H 삽입부 피스 개진 | JIN | '94.12.16 | WIRE RANGE | | CLASS |
| | DR | | INSULATION | | TYPE |
| LTR REVISION RECORD | CHK | APP. | DATE | SCALE | PART NO. |
| DR. JIN '94.08.18 | CHK | | 10/17 | 2/1 | MG610350 |
| CHK. S. W. K | APP. | | 10/07 | | |
| | | | PART NAME | | |
| | | | | | SWP 14F HOUSING |