



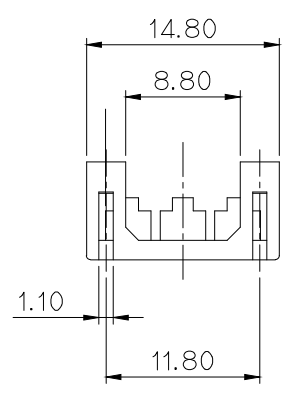


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

**NOTE**

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG614160, MG624161, MG624209
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



**주 기**

- 지시하지 않은 반경 R은 0.3으로 한다.
- 지시하지 않은 모따기 C는 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 HSG : MG614160, MG624161, MG624209
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

NO.	MATERIAL	COLOR
0	PA66 (V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

MATERIAL	PBT(V0) OR PA66(V0)		
FINISH	NATURAL		
MATERIAL	△SEE TABLE		
FINISH	△SEE TABLE		
△	NO.	MATERIAL	COLOR
*	0	PA66 (V0)	NATURAL
	1		RED
	2		BLUE
	3		YELLOW
	5		BLACK

ISSUE MARK

**APPROVED**  
2016-02-26  
KOREA ELECTRIC  
TERMINAL CO., LTD.  
Electronic Product Development Team

				MATERIAL △SEE TABLE		KOREA ELECTRIC	
				FINISH △SEE TABLE		TERMINAL CO., LTD.	
				WIRE RANGE		CLASS	
				INSULATION		TYPE 060	
ECO-1509-038	근거	도면	수정	PSH	KSH	BUC	'15.09.03
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1
DR.	CJH '08.02.18	CHK.	HAK	08.02.18	SEE TABLE	PART NO.	MG634165
CHK.		APP.		08.02.18	PART NAME	NEW 060 3P R/HOLDER	