







GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 미성형이 없을것.
- 상대 HOUSING PART NO. : MG653012
- 적용 TERM' : ST740771 / ST740959

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG653012
- APPLICABLE TERMINAL : ST740771 / ST740959

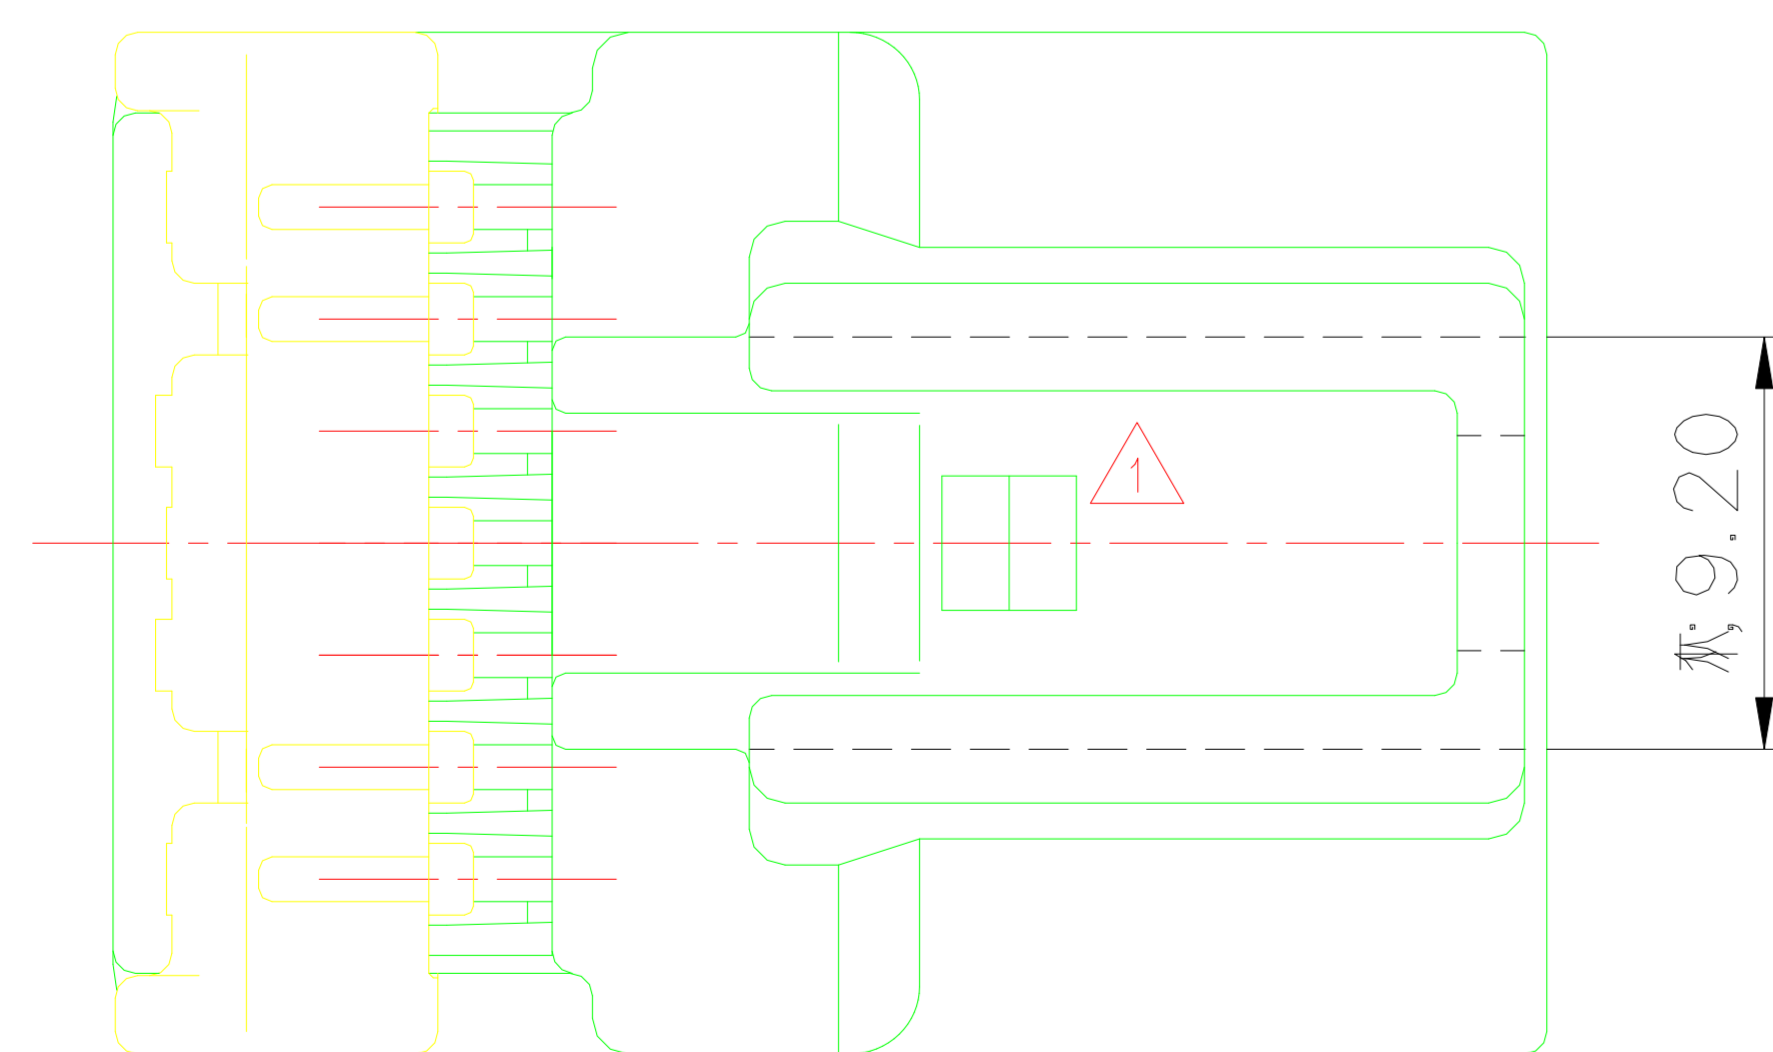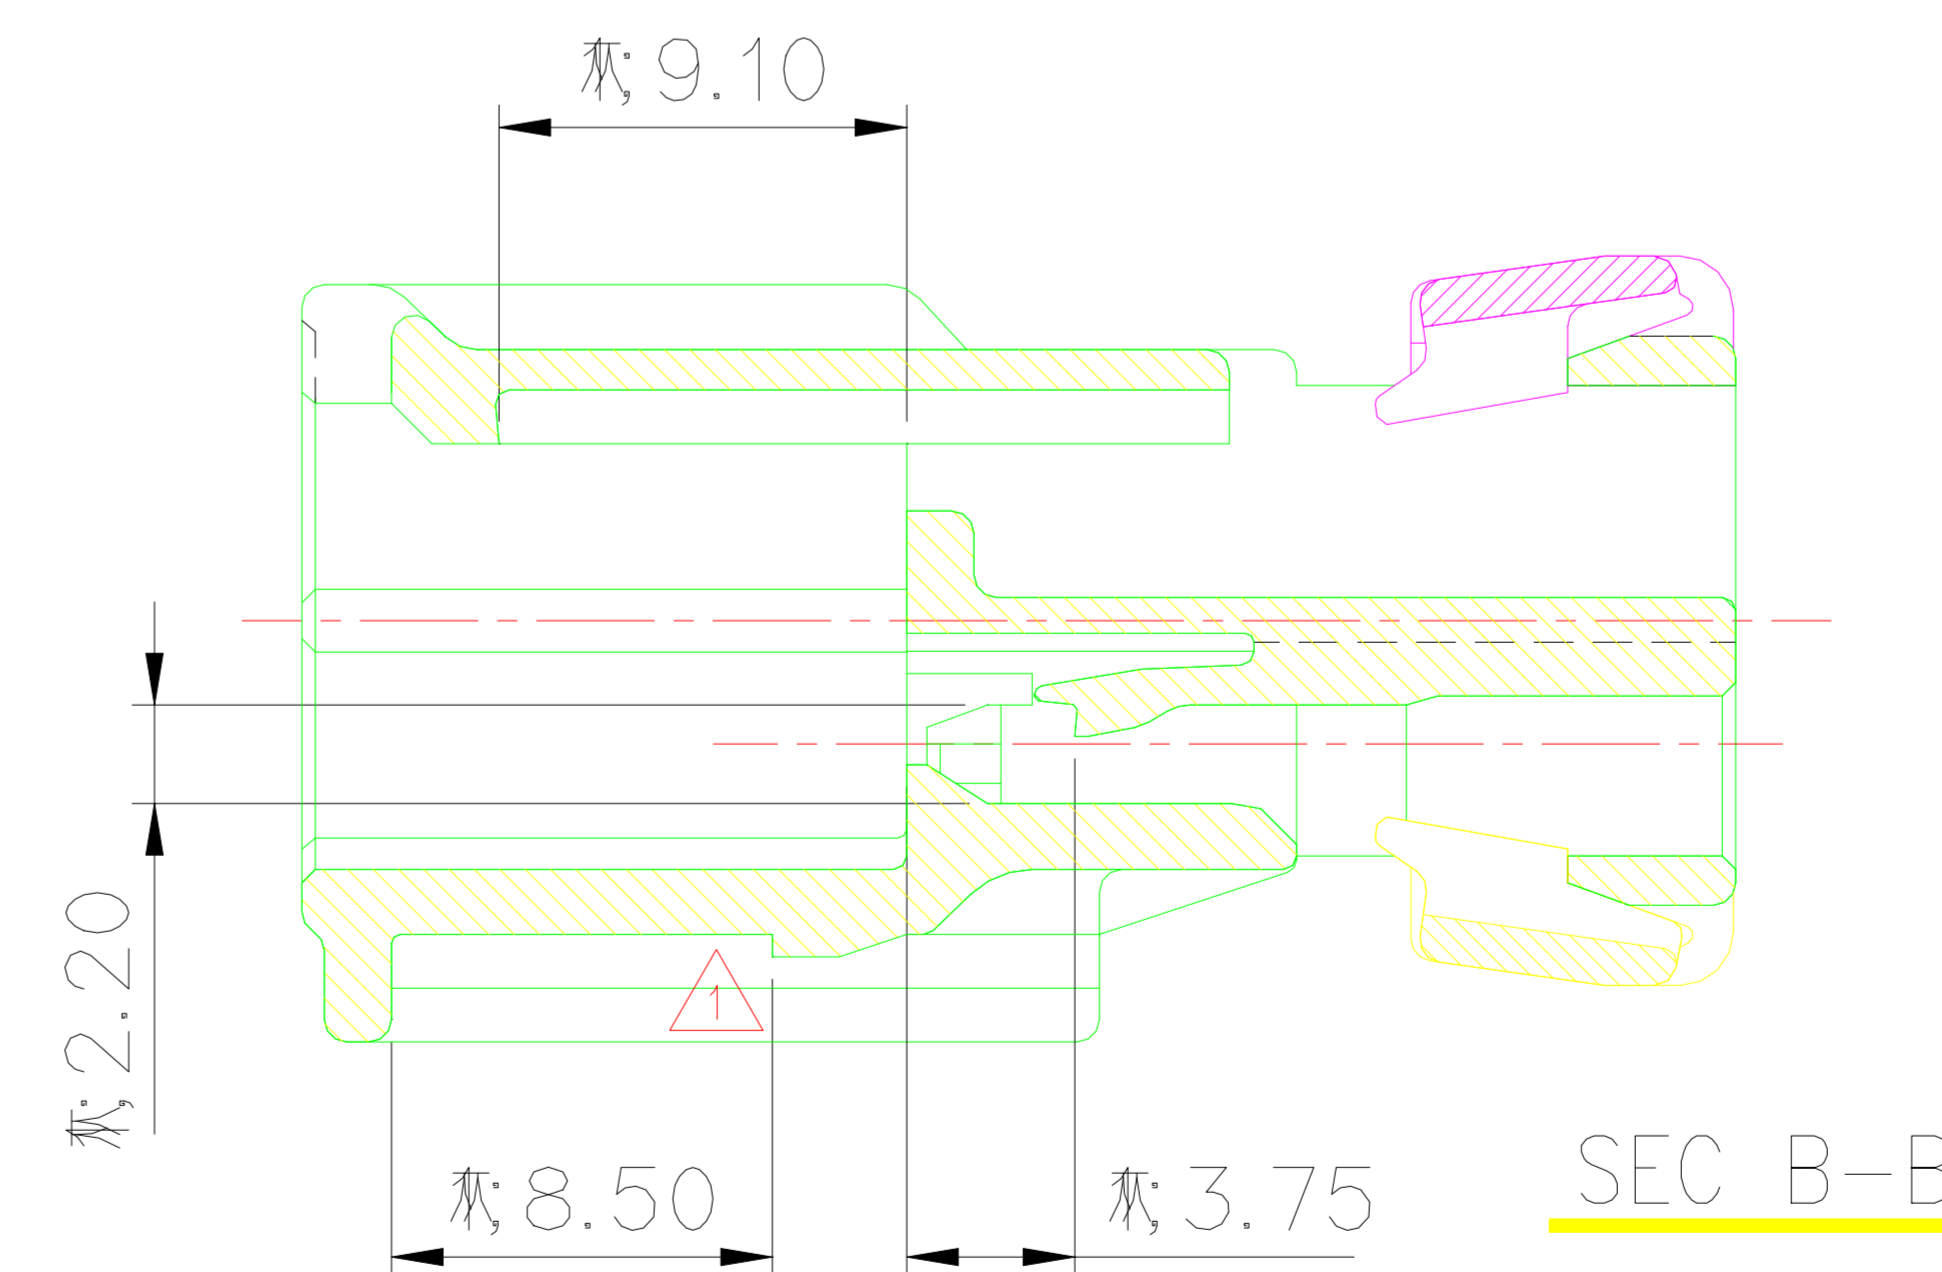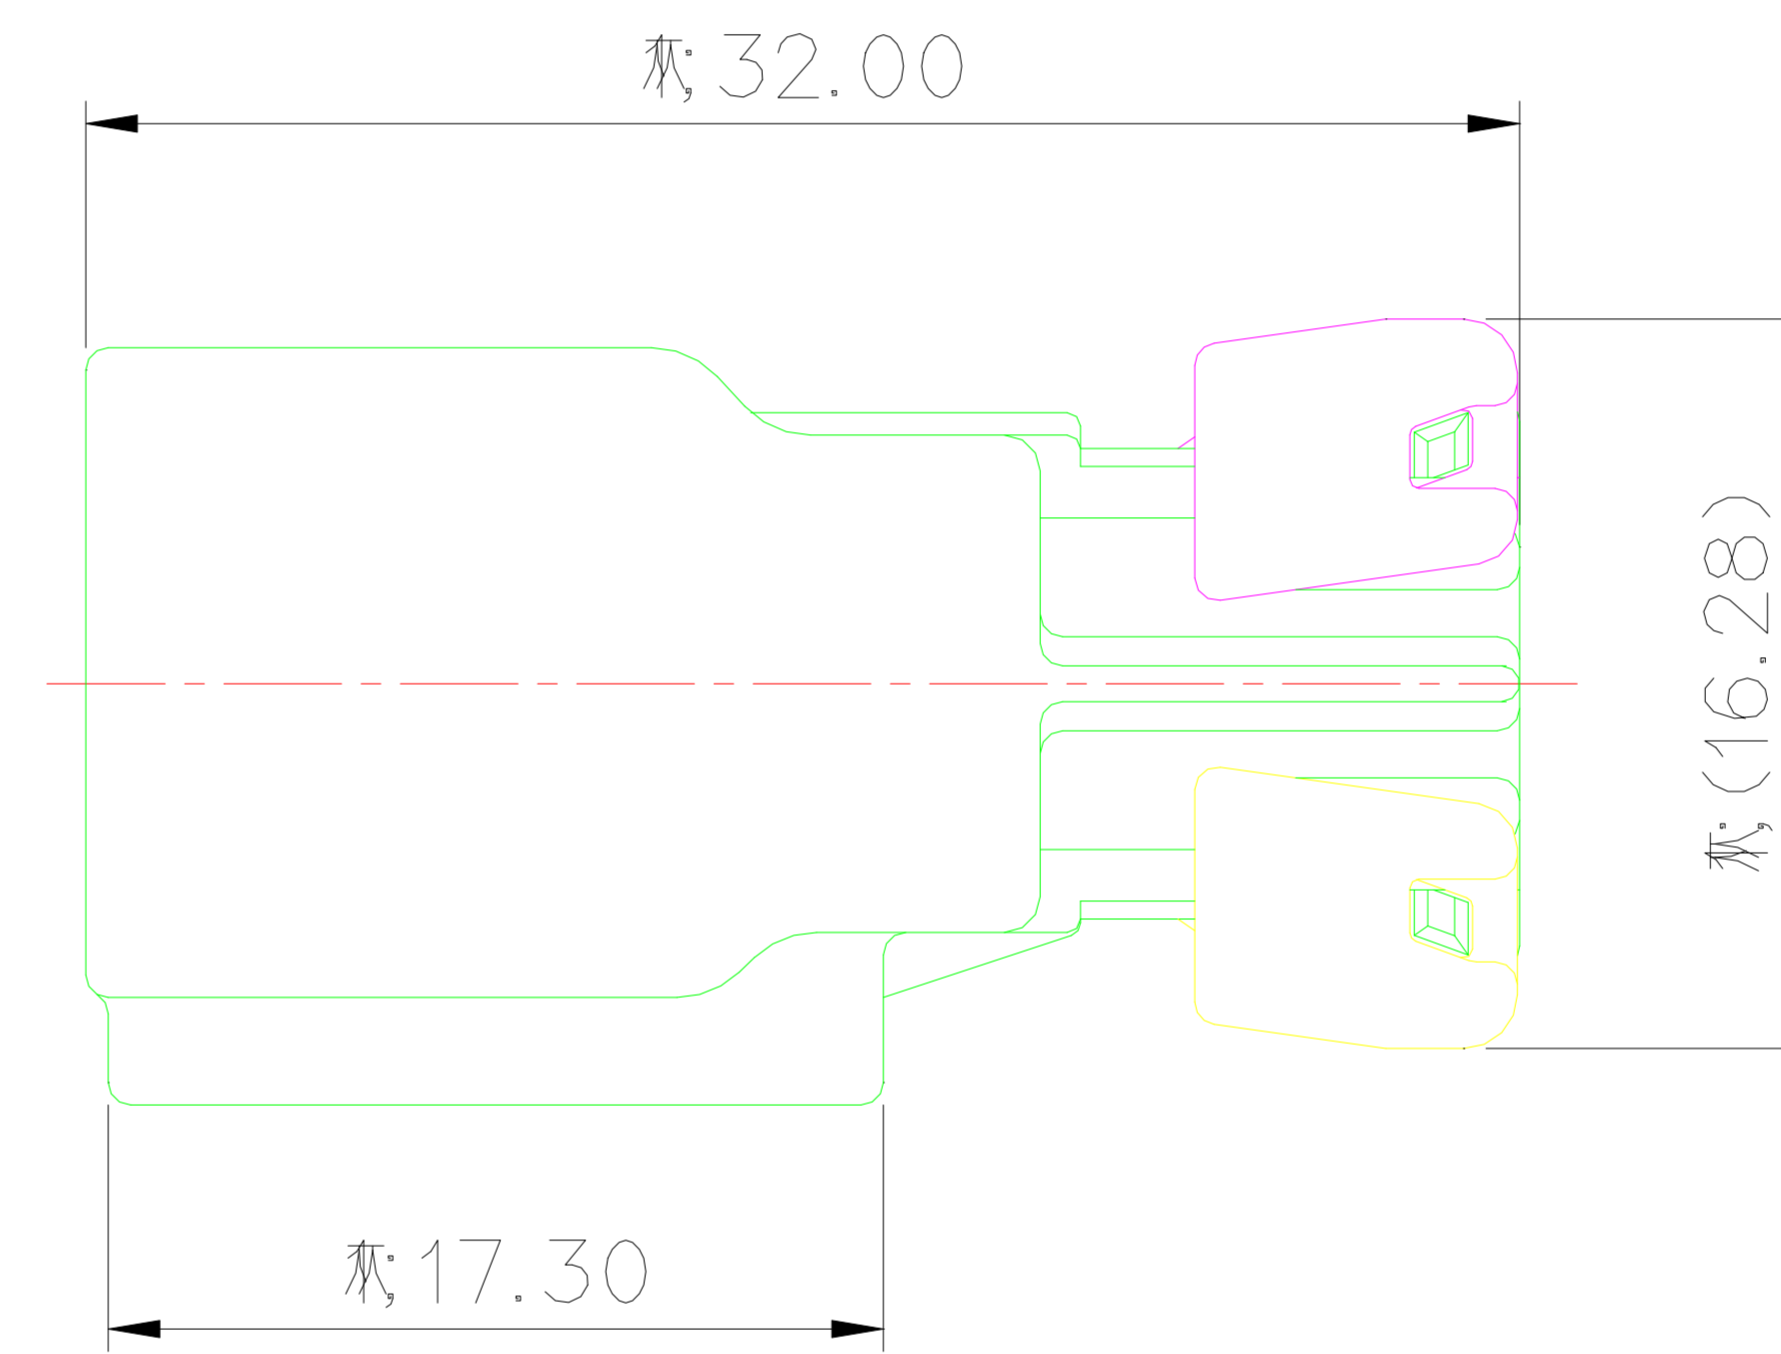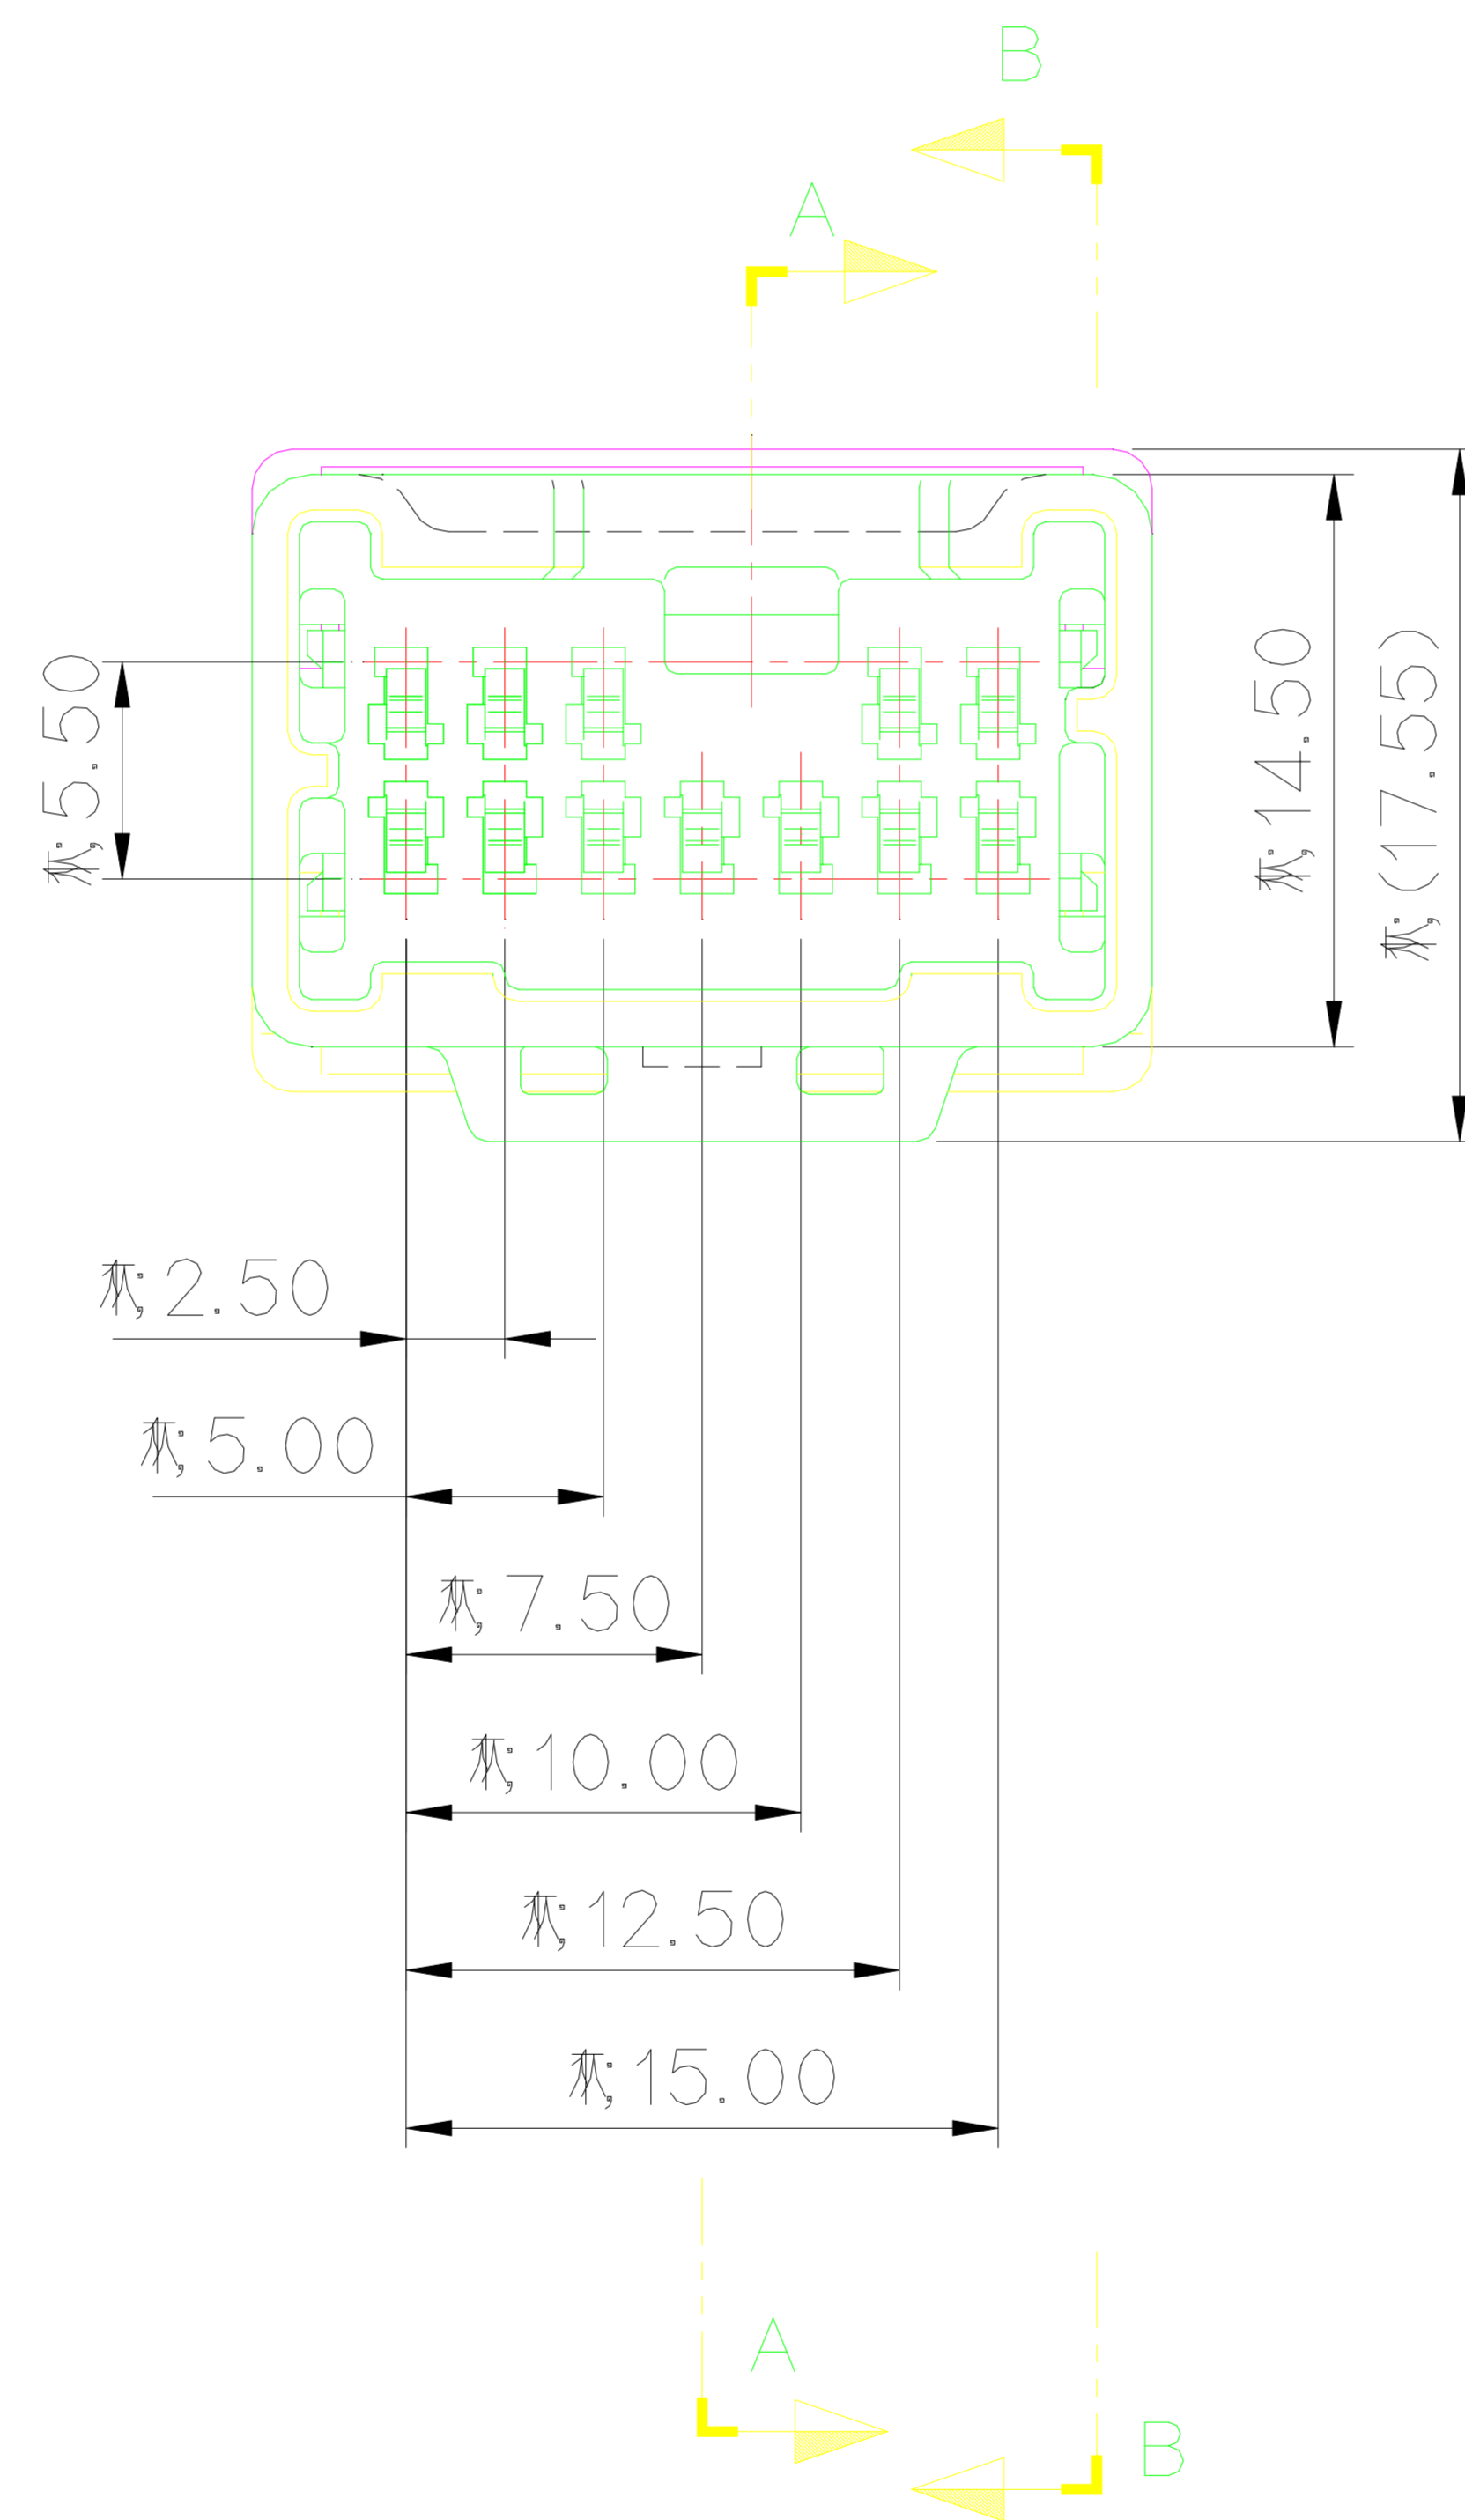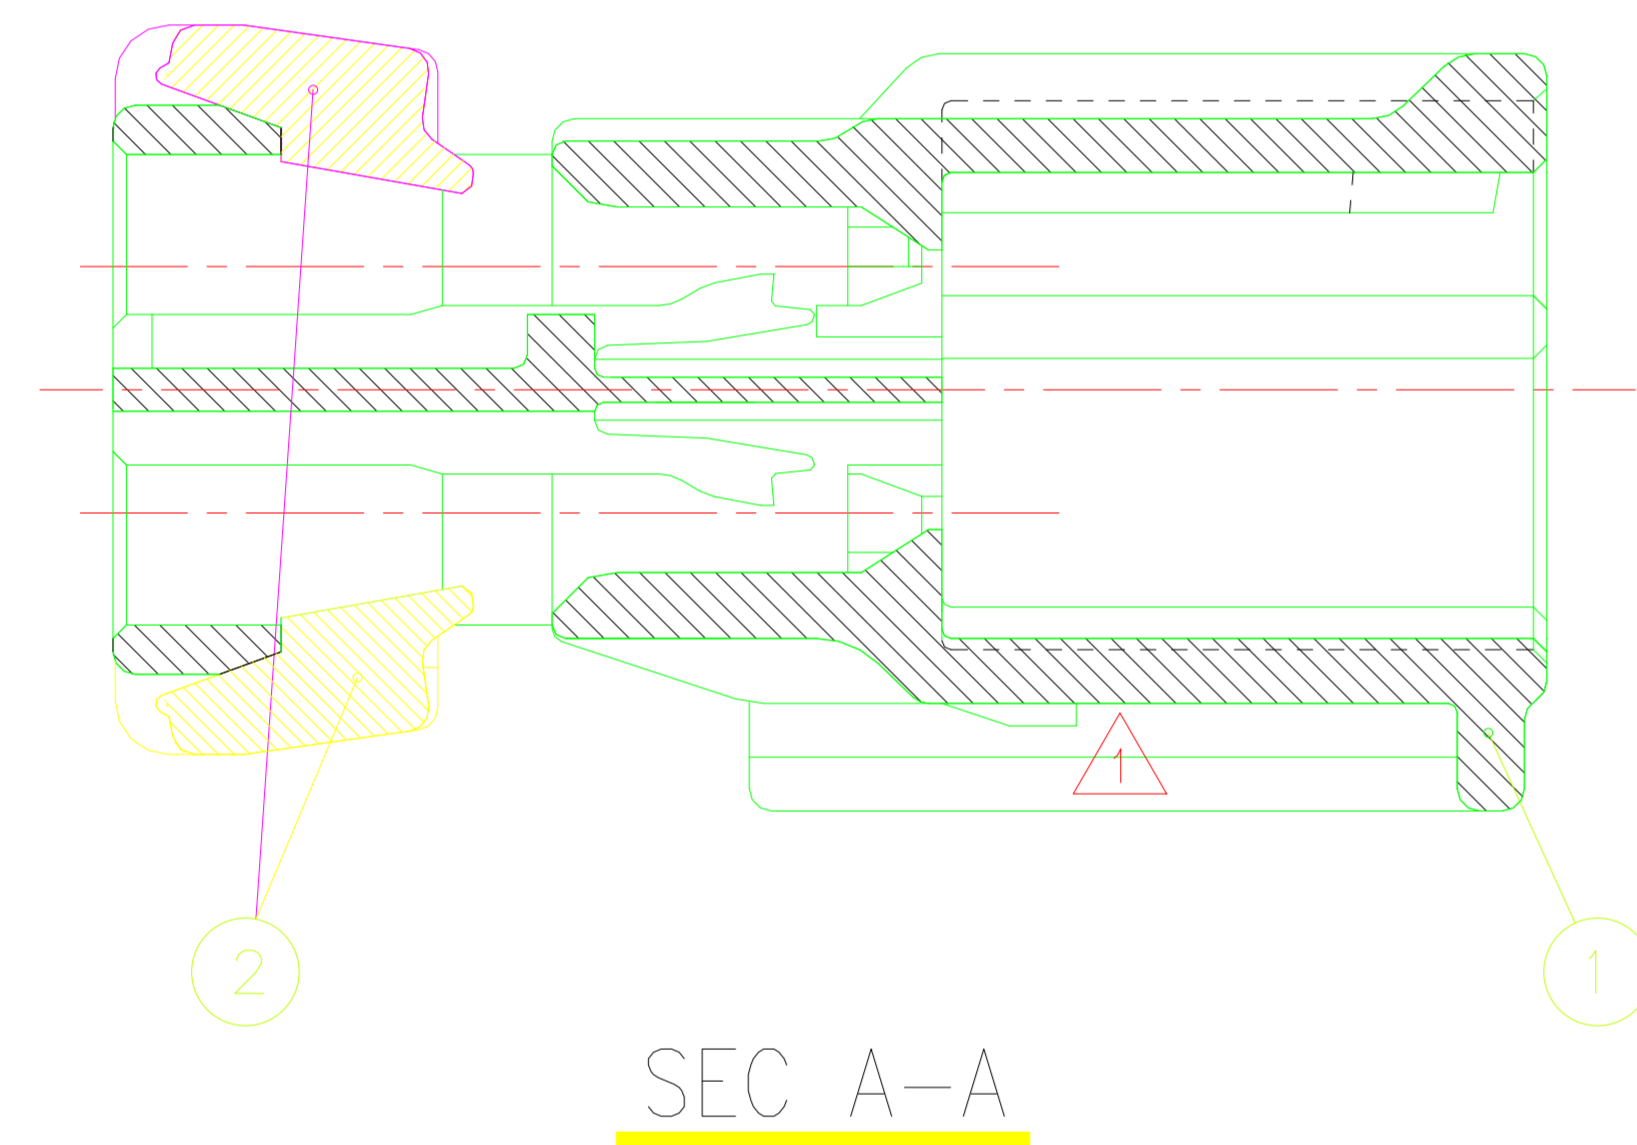

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG673010	040III 12P MALE HS'G	PBT	NATURAL
②	MG673011	040III 12P MALE R/HOLDER	PBT	NATURAL

MATERIAL		SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.
FINISH		SEE TABLE	
WIRE RANGE			CLASS 040III
INSULATION			TYPE
REVISION RECORD		DR. KYM 2004.01.30	SCALE 2/1
LTR		CHK. [Signature]	PART NO. MG643009
CHK. 01.30		APP. [Signature]	PART NAME 040III 12P MALE ASS'Y