
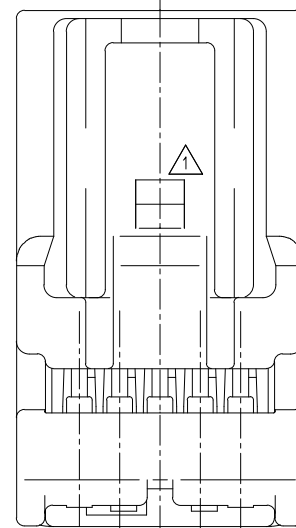
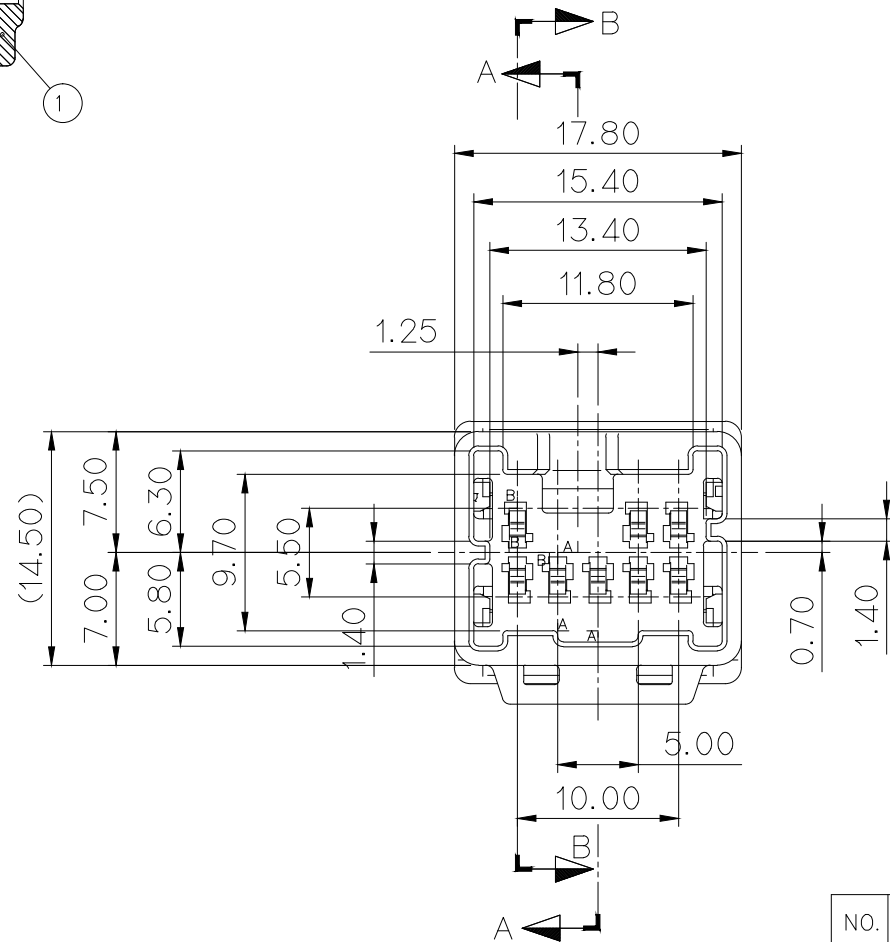


SECTION B-B

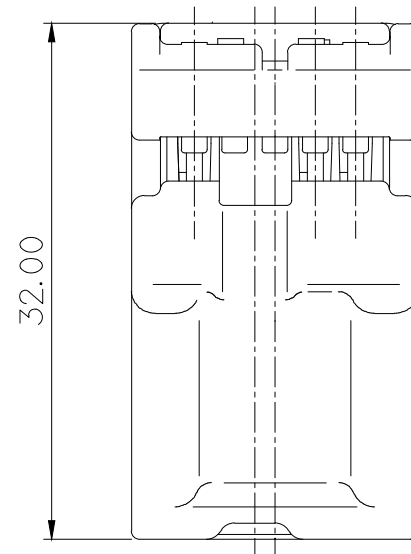

GENERAL TOLERANCE (HOUSING)


10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 미성형이 없을것.
2. 상대 HOUSING PART NO. : MG653257
3. 적용 TERM' : ST740771 / ST740959

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG653257
3. APPLICABLE TERMINAL : ST740771 / ST740959

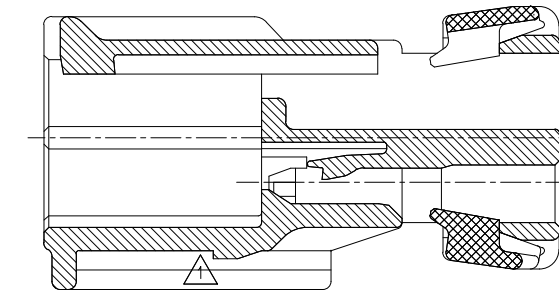

SECTION A-A

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG673262	040III 8P MALE HS'G	PBT	NATURAL
②	MG673263	040III 8P MALE R/HOLDER	PBT	NATURAL



ISSUE MARK

		MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
		FINISH	SEE TABLE	
		WIRE RANGE	CLASS	.040
		INSULATION	TYPE	7285-5985
△	ECO-1111-040 크기 도면 재작성 (CLIP 삽입력 과다로 인해 CLIP 체결부 치수변경)	AJH	DATE	'11.11.03
LTR	REVISION RECORD	DR.	CHK.	APP.
DR.	HEO S.H 04.8.23	CHK.		
CHK.	8/23	APP.	8/23	
		TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
		SEE TABLE	2/1	MG643261
		PART NAME		
		040 III 8P MALE ASSY(TKN08MW)		