





GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON



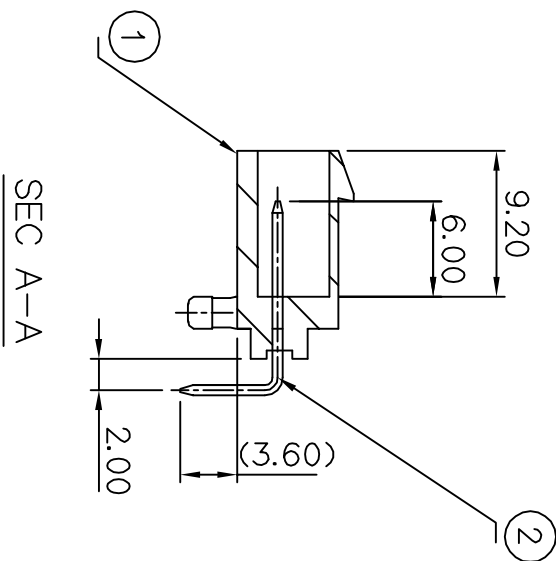


SEC A-A

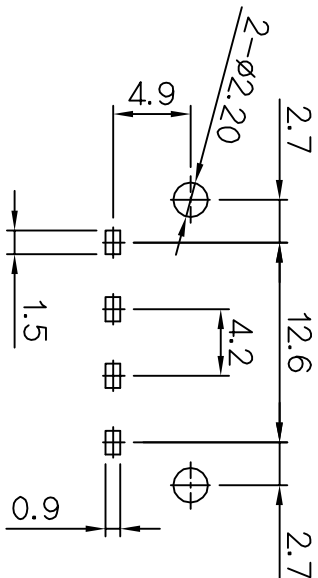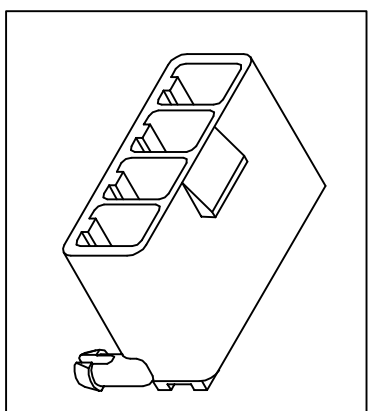

PCB BOARD (T=1.6mm)

NO.	PART NAME	PART NO	MATERIAL	FINISH	Q'TY
①	060 4P PCB HOUSING (HZT)	MG673370	PBT	NATURAL	1 EA
②	060 PCB TAB TERM(HZT)	P901964	BRASS	PRE-TIN	4 EA

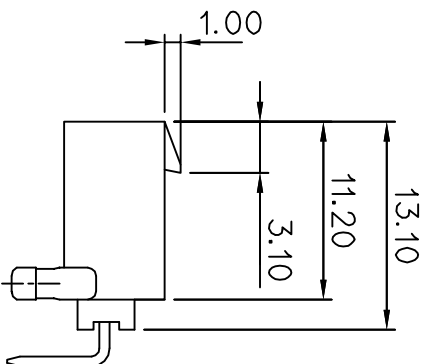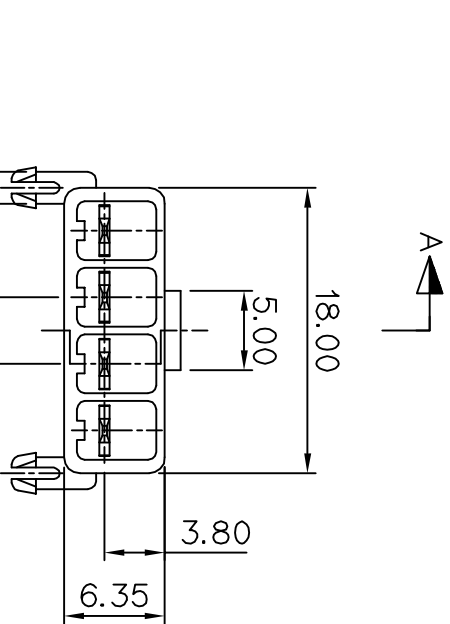

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 PLUG HOUSING : MG613368
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDES)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE PLUG HOUSING : MG613368
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION

ISSUE MARK

**KIET** KOREA ELECTRIC  
ENGINEERED  
TERMINAL CO., LTD.

CLASS .060

MATERIAL	SEE TABLE	FINISH	SEE TABLE	WIRE RANGE	INSULATION	SCALE	PART NO.
						2/1	MG643369
REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE AS NOTED	PART NAME	
LSY 05. 01. 31	CHK.	APP.		11.04.27	060 PCB 4M CONN'T ASS'Y(HRT)		
CHK.							