
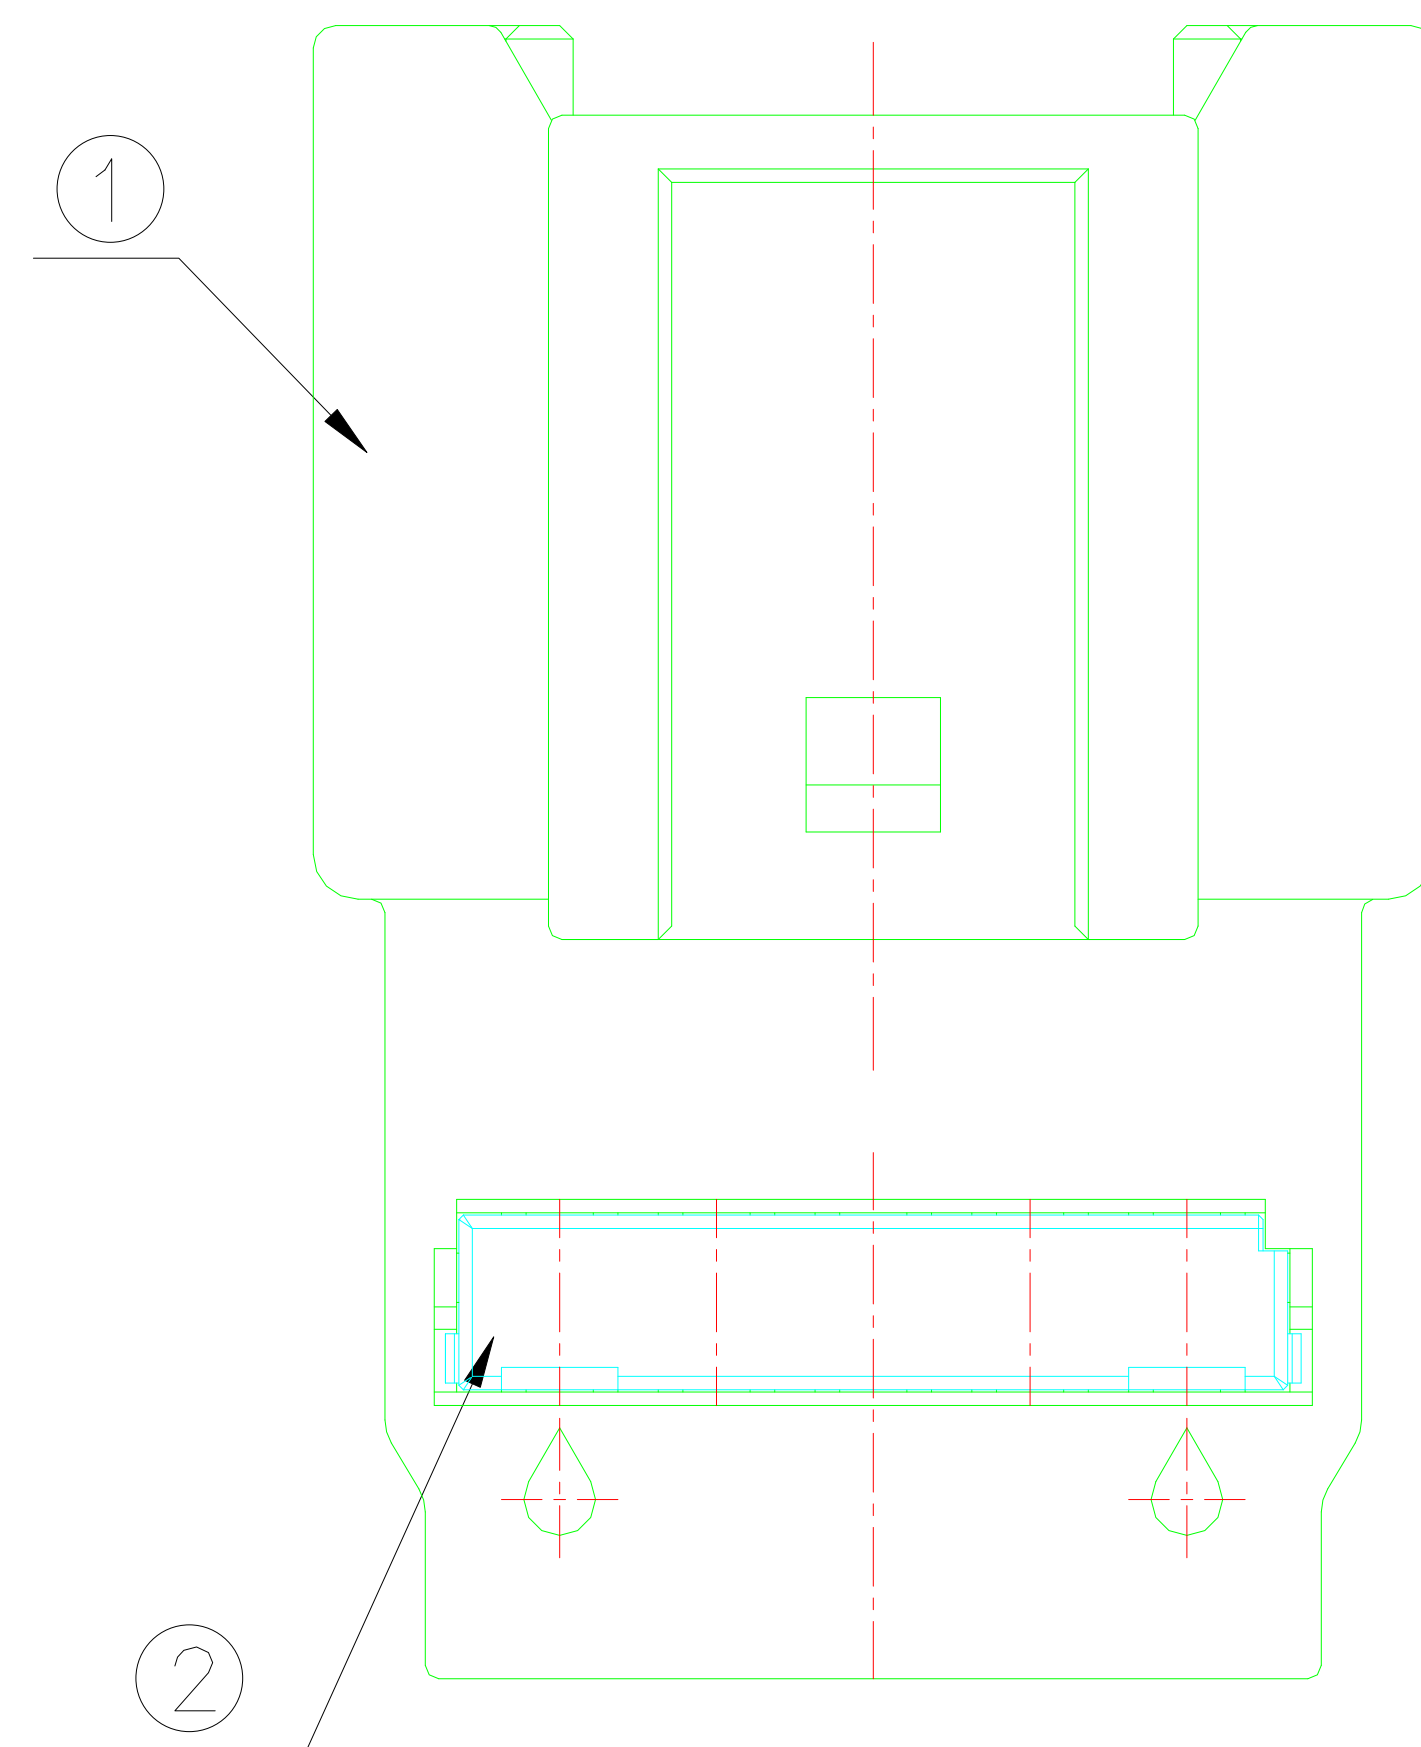
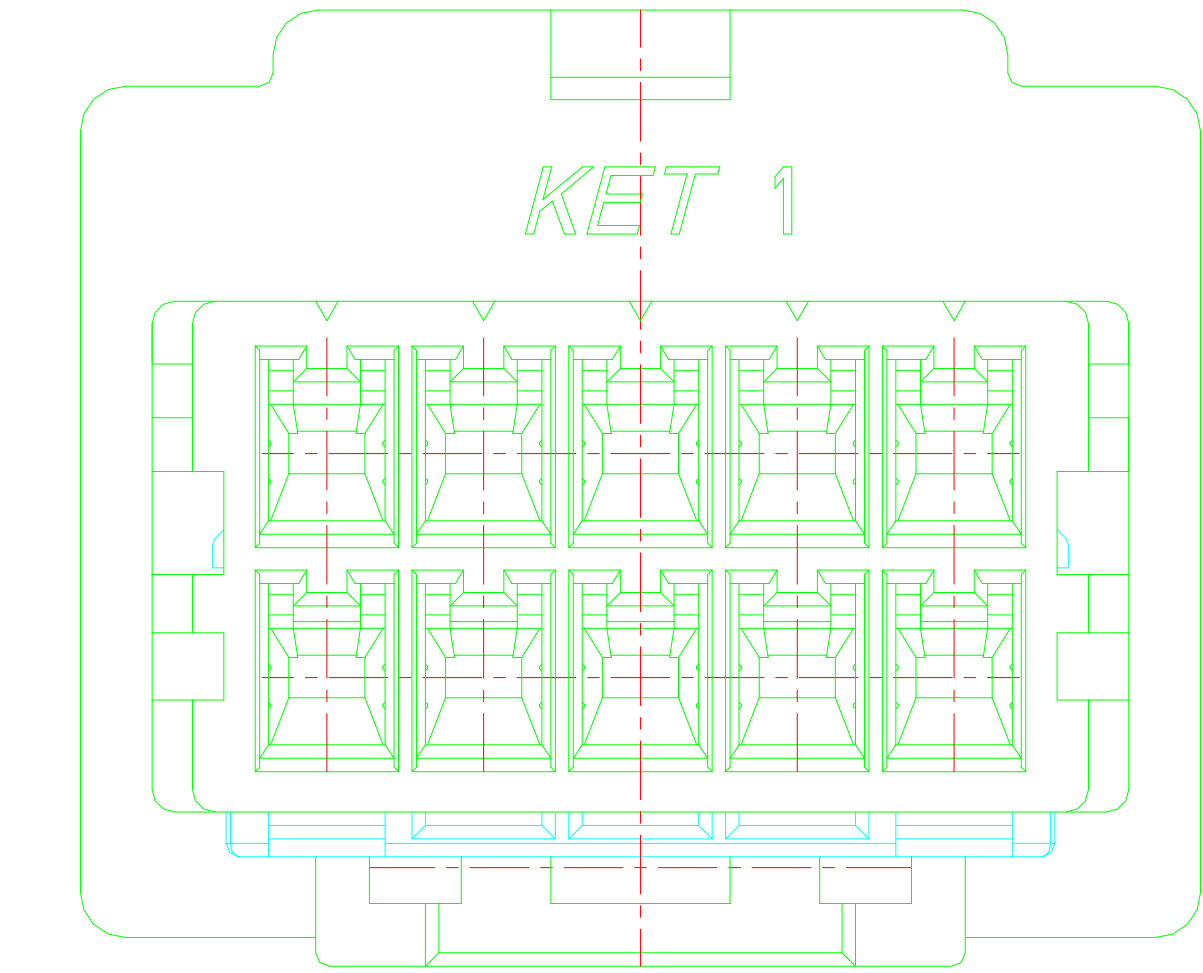
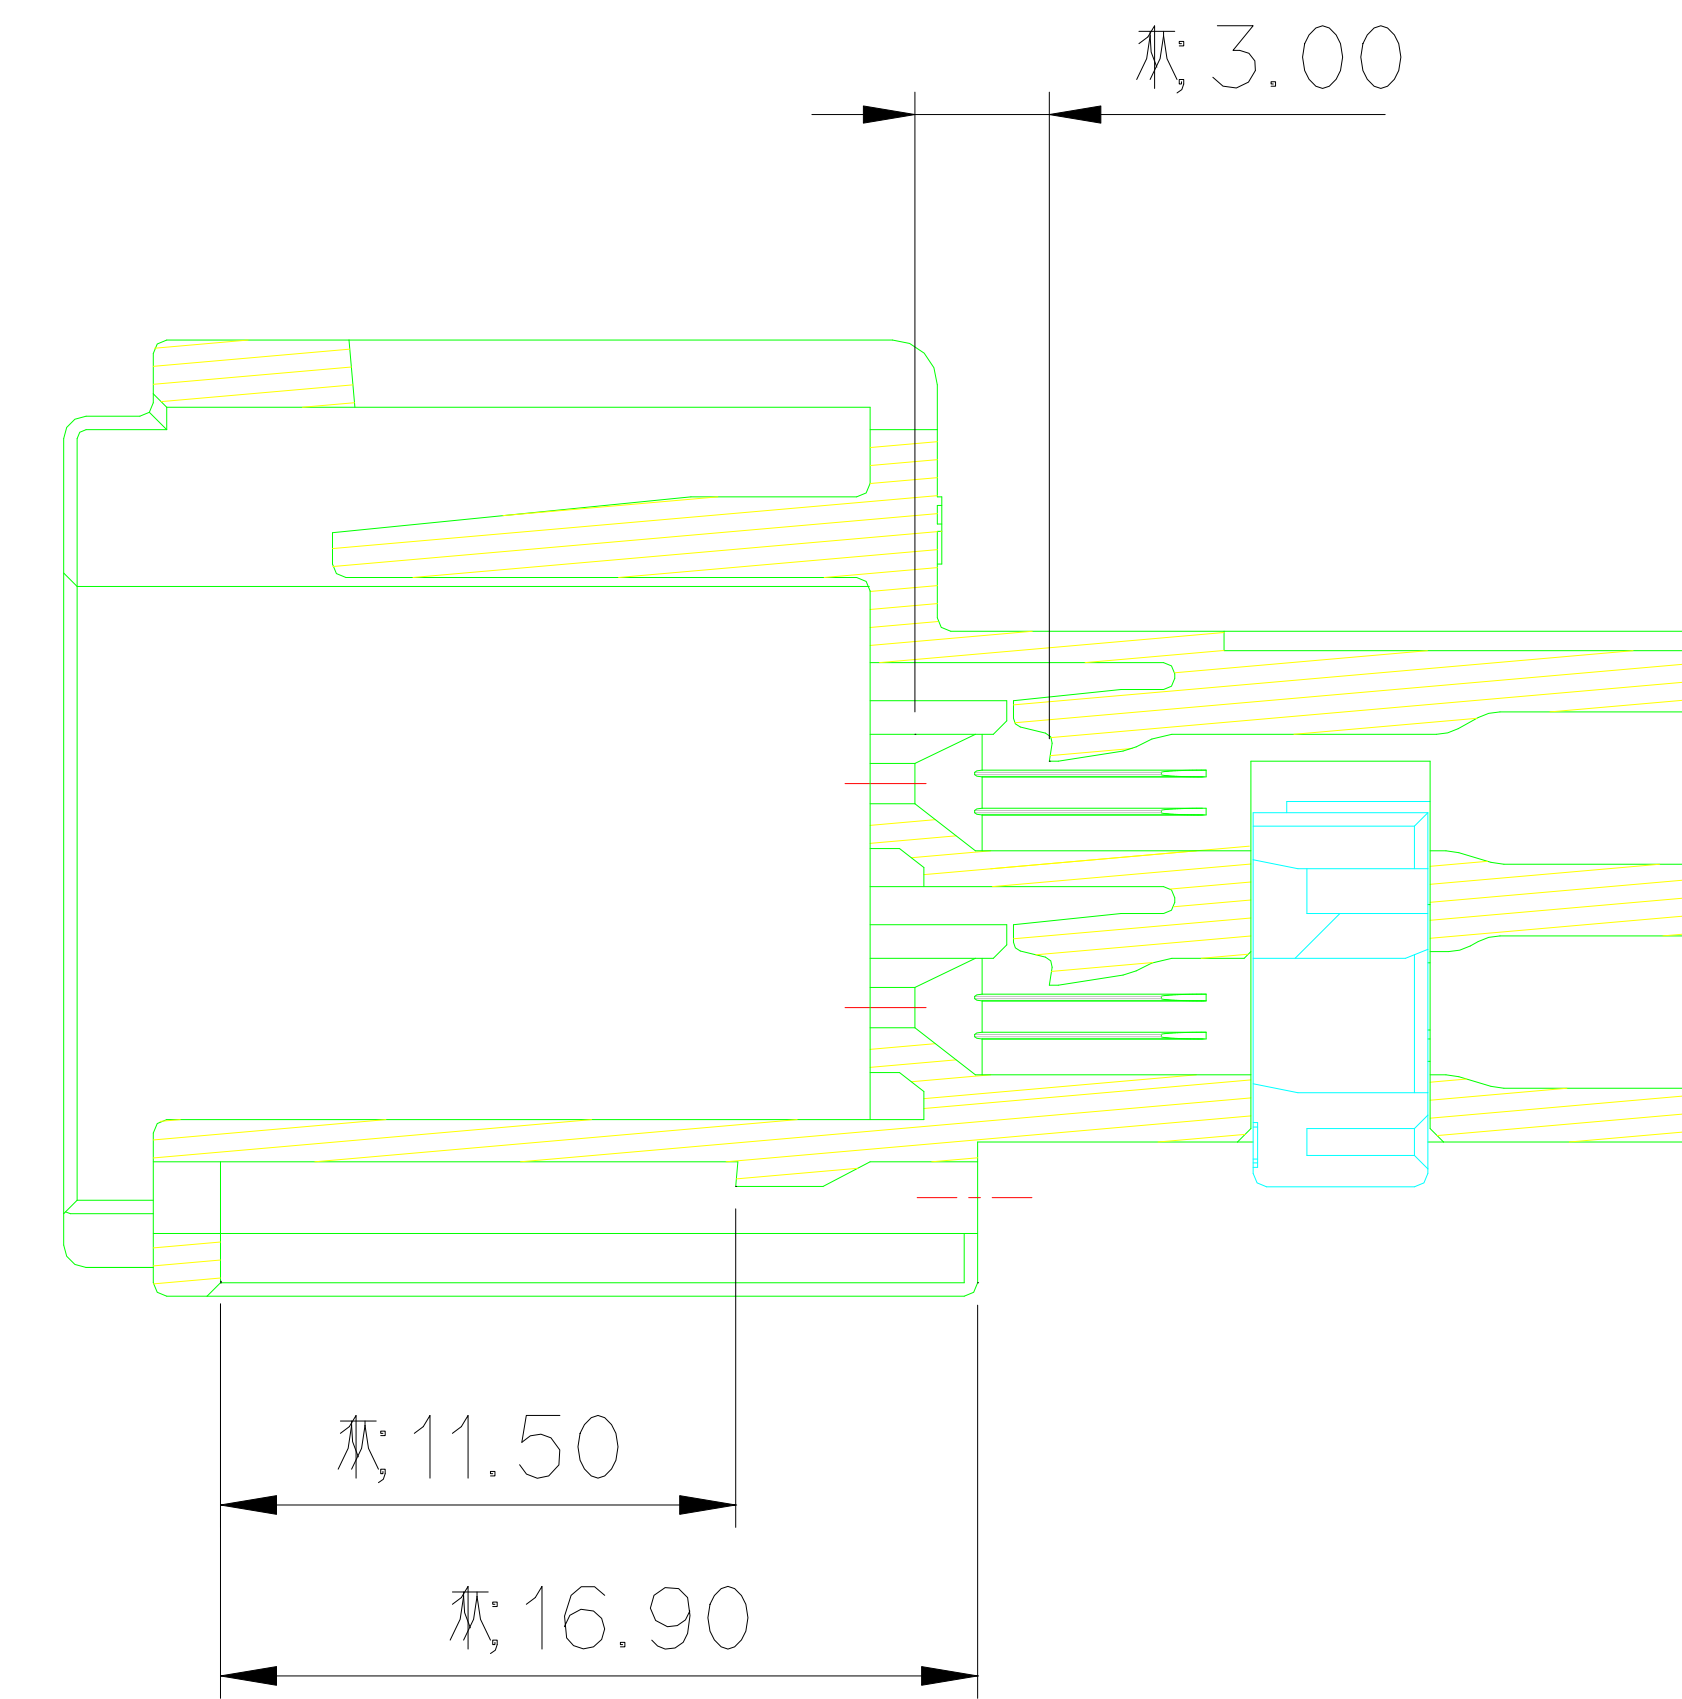
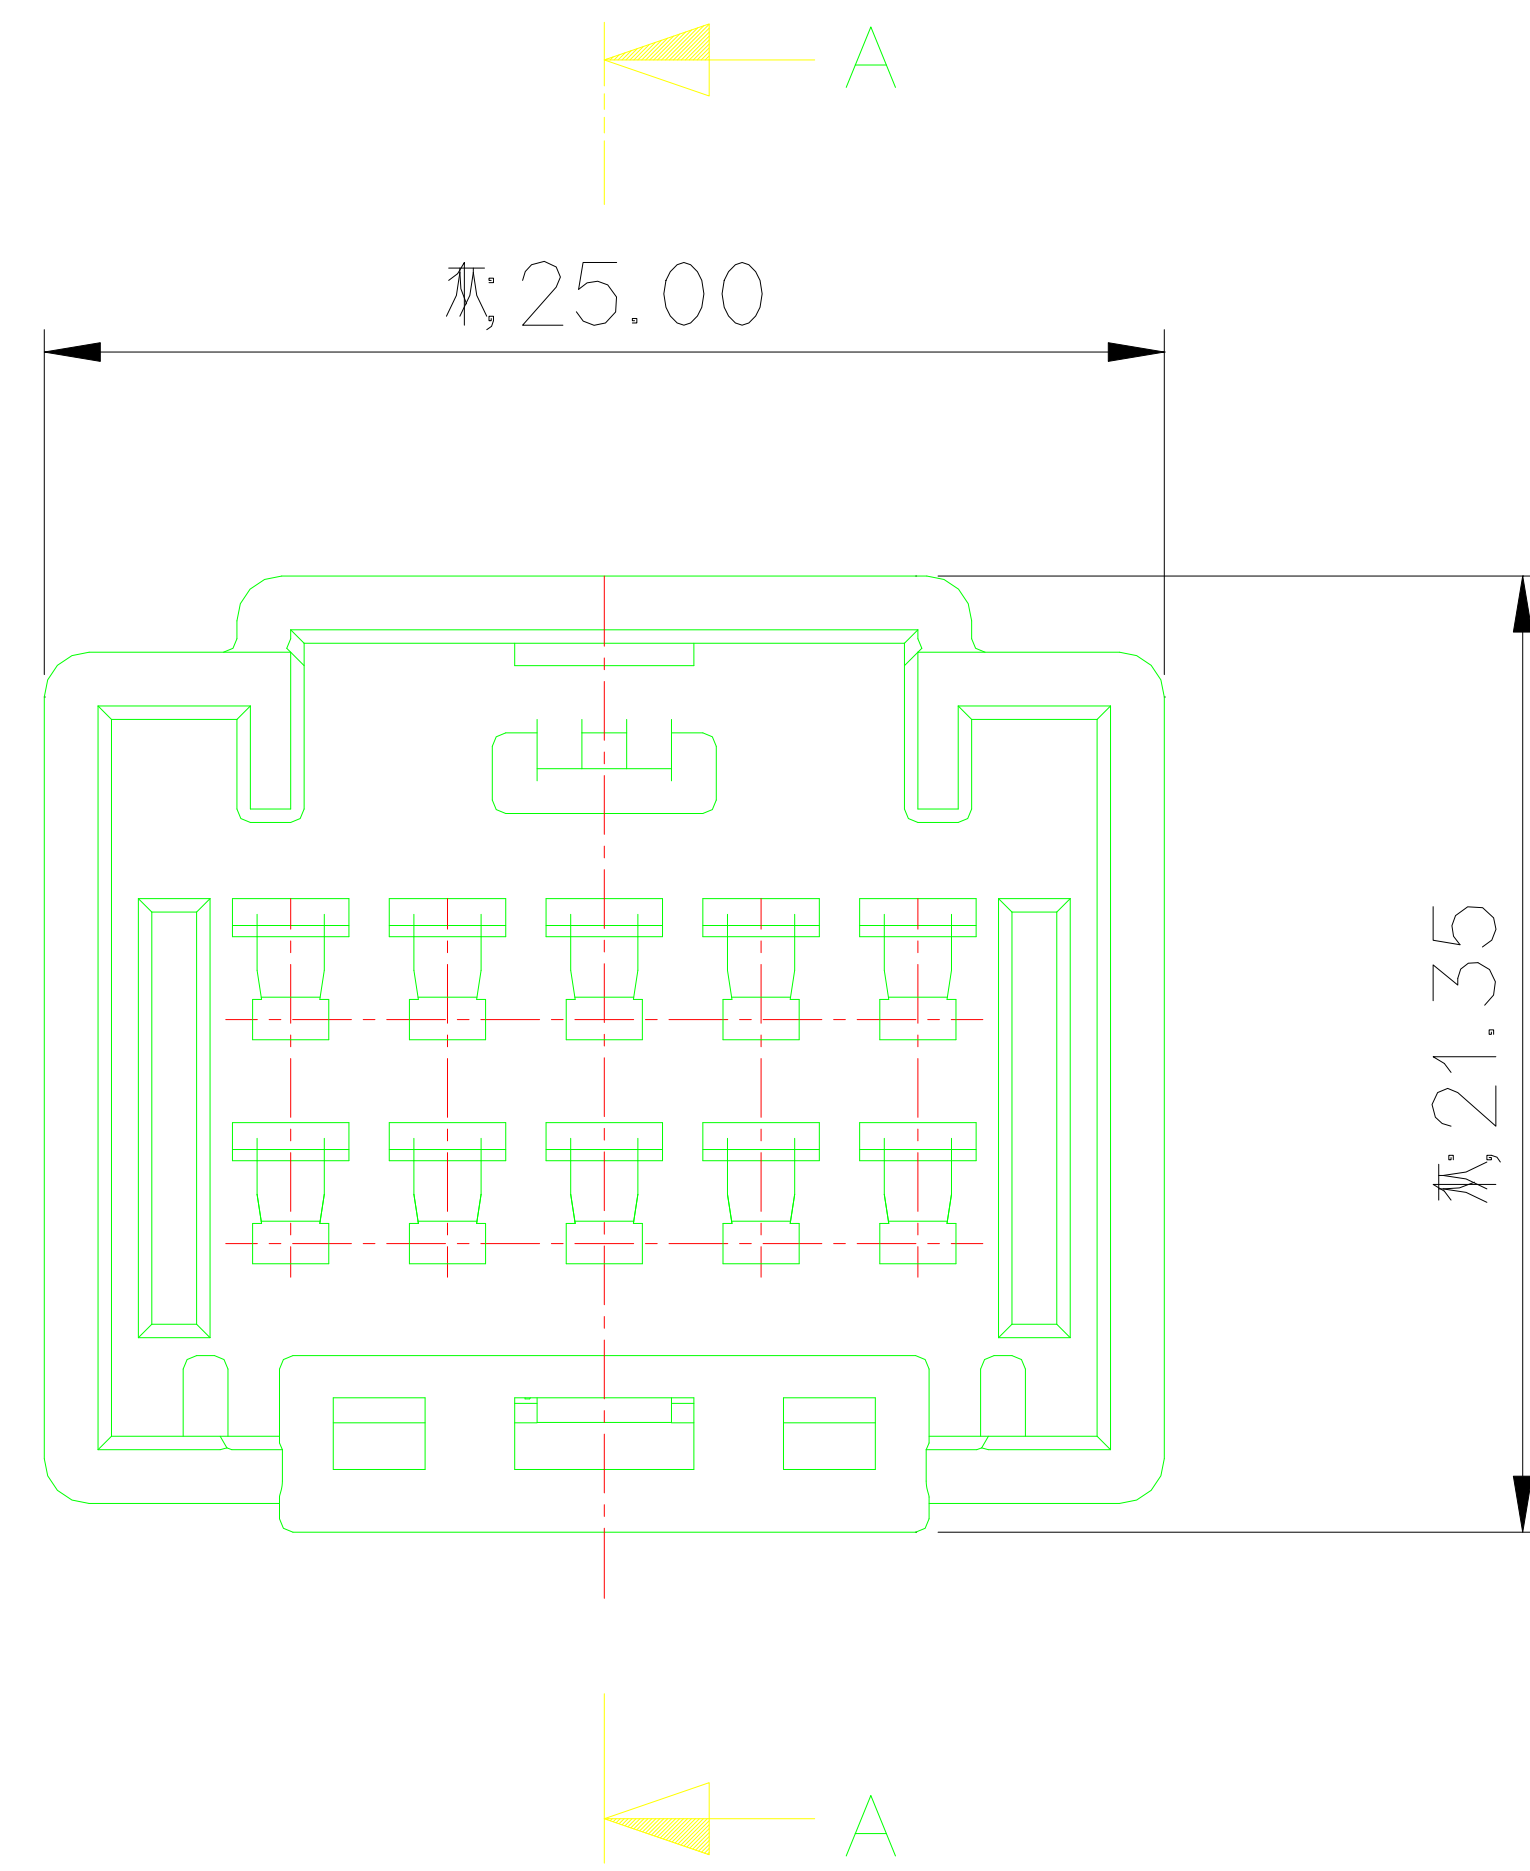


ISO VIEW


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	060 10M HOUSING	MG675173	PBT	NATURAL	1
2	060 10M SPACER	MG675174-41	PBT	LIGHT GRAY	1

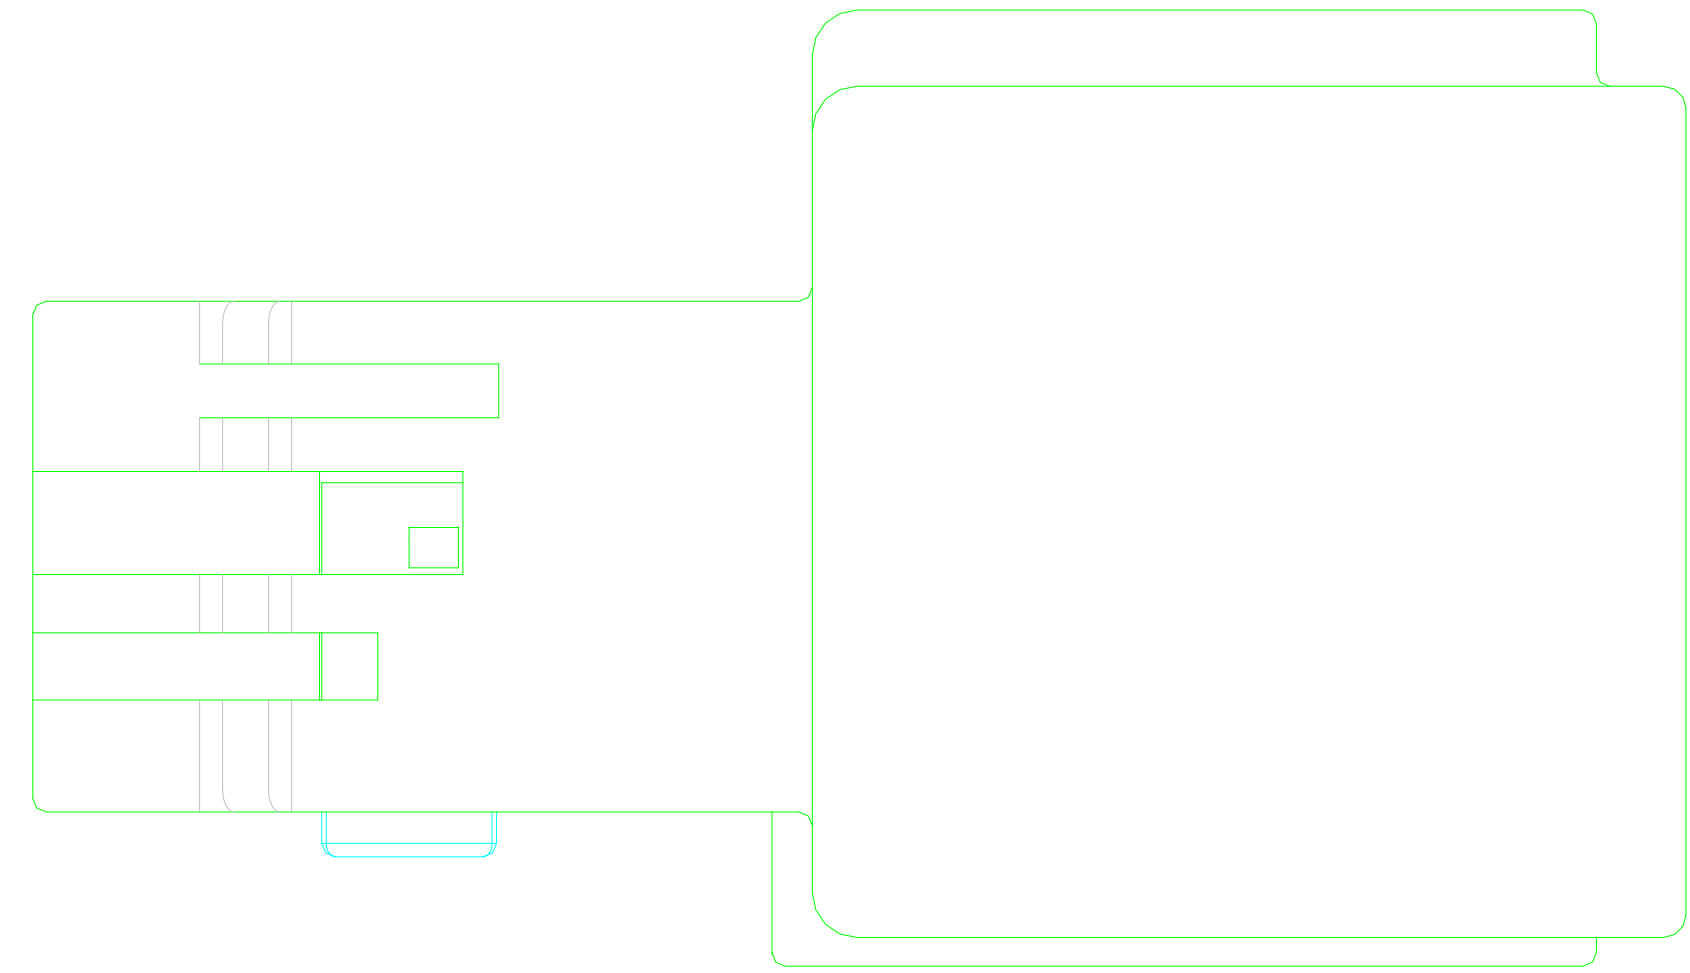

주 기

- 적용 TERMINAL : ST741270-3, 1271-3, 1272-3
- 적용 CONNECTOR : MG655175
- 적용 CLIP : MG631267, 631268, 631471, 631929, 632019, 632970
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISSUE MARK

LTR		REVISION RECORD		DR.	CHK.	APP.	DATE	MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
DR.		CHK.		TOLERANCE EXCEPT AS NOTED		SCALE	2/1	FINISH	SEE TABLE	
CHK.		APP.		WIRE RANGE		INSULATION		CLASS		060
				PART NAME		060 10M ASS'Y		TYPE		
				PART NO.		MG645172				