CUSTOMER DRAWING

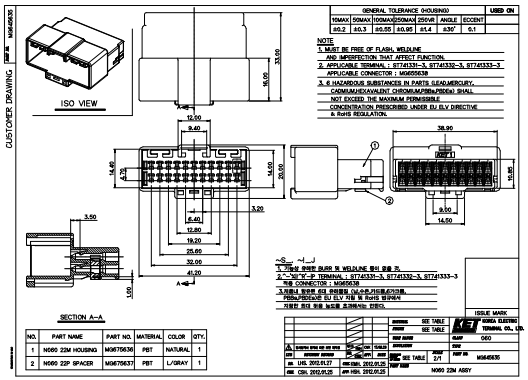

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.05	±0.05	±1.4	±30'	0.1	

NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : 07741331-3, 07741332-3, 07741333-3
APPLICABLE CONNECTOR : MG605638
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

1. 지시없는 모서리 반경은 0.3이고 WELDLINE 없이 성형 할 것.
2. "-"단자"-P" TERMINAL : 07741331-3, 07741332-3, 07741333-3
적용 CONNECTOR : MG605638
3.지정된 6종유해 성분 함유량을 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안됨.

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	N060 22M HOUSING	MG675636	PBT	NATURAL	1
2	N060 22P SPACER	MG675637	PBT	L/GRAY	1

ISSUE MARK
KOREA ELECTRIC TERMINAL CO., LTD.
DEO
SEE TABLE
SEE TABLE
2/1
MG645635
N060 22M ASSY
APP. HSN. 2012.01.25

PRODUCTION DRAWING

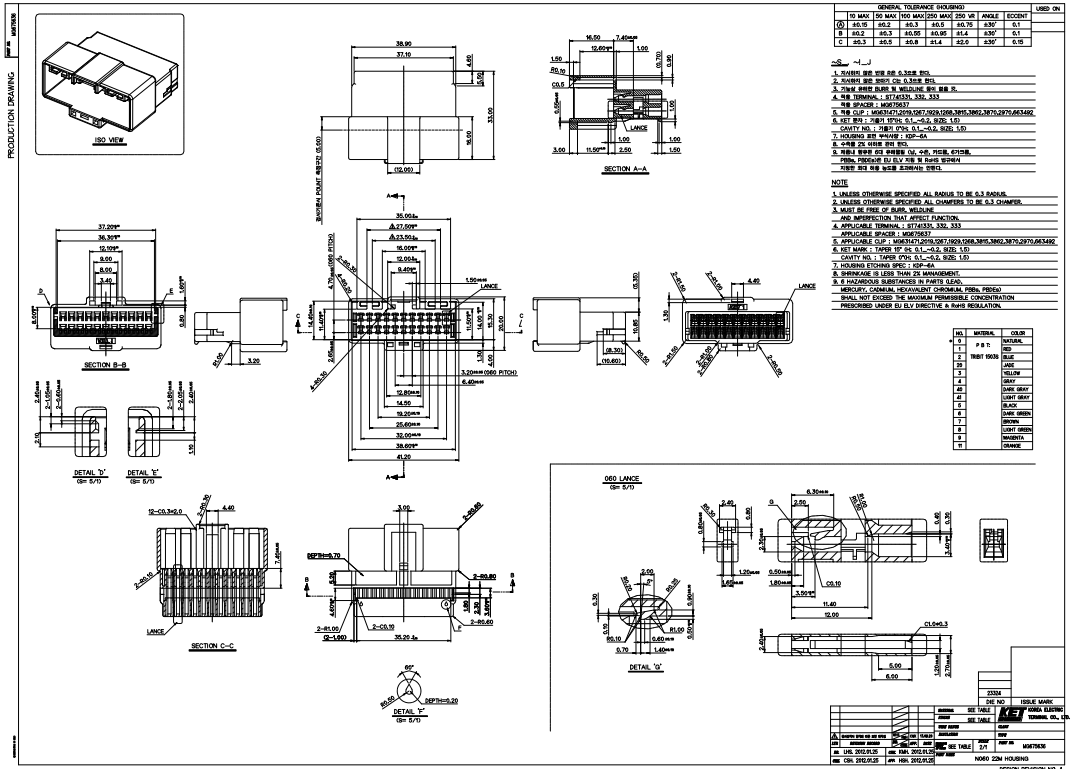

GENERAL TOLERANCE (HOUSING)								USED ON
	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	
B	±0.2	±0.3	±0.05	±0.05	±1.4	±30'	0.1	
C	±0.3	±0.5	±0.8	±1.4	±2.0	±30'	0.15	

1. 지시없는 모서리 반경은 0.3이고 R0.5.
2. 지시없는 모서리 반경은 0.3이고 R1.
3. 지시없는 성형불량 및 WELDLINE 없이 성형 할 것.
4. 적용 TERMINAL : 07741331, 332, 333
적용 SPACER : MG675637
5. 적용 CLIP : MG631471-2019/1267/1929/1268/3815/3862/3870/2970/663492
6. KEY 위치 : 기준치 0°에서 0.1~-0.2, SIZE: 1.6)
CAVITY NO. : 기준치 0°에서 0.1~-0.2, SIZE: 1.6)
7. HOUSING 재질 : KEP-6A
8. 수축률 2% 이하로 관리 할것.
9. 지정된 6종유해 성분 함유량을 (Hg, Cr(6), PBB등, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안됨.

NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL : 07741331, 332, 333
APPLICABLE SPACER : MG675637
5. APPLICABLE CLIP : MG631471-2019/1267/1929/1268/3815/3862/3870/2970/663492
6. KEY MARK : TAPER 10° 0°에서 0.1~-0.2, SIZE: 1.6)
CAVITY NO. : TAPER 0°에서 0.1~-0.2, SIZE: 1.6)
7. HOUSING STOCKING SPEC : KEP-6A
8. SHRINKAGE IS LESS THAN 2% MANAGEMENT.
9. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2	TRIBIT 1930S	BLUE
20		JADE
3		YELLOW
4		GRAY
42		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

23324
DIE NO.
ISSUE MARK
KOREA ELECTRIC TERMINAL CO., LTD.
SEE TABLE
SEE TABLE
2/1
MG675636
N060 22M HOUSING
APP. HSN. 2012.01.25

DESIGN REVISION NO. 1