



GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON		
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	70MAX	100MAX	125MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	




SECTION A-A

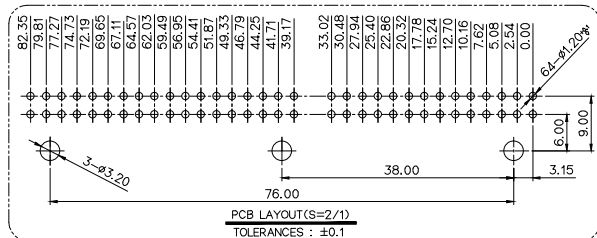

PCB LAYOUT(S=2/1)

TOLERANCES : ±0.1

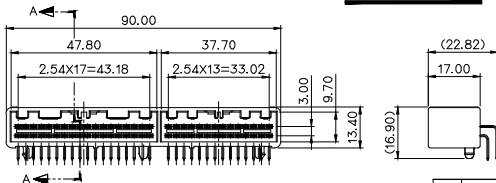


주 기

1. 기능상 유해한 BURR 및 변형이 없을것.

2. 적용 FEMALE HOUSING :

MG655759(28P), MG655760(36P)

3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NO.	MATERIAL	COLOR
0	NATURAL	
1	RED	
2	BLUE	
20	JADE	
3	YELLOW	
4	GRAY	
40	DARK GRAY	
41	LIGHT GRAY	
5	BLACK	
6	DARK GREEN	
7	BROWN	
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

NOTE

1. MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICATION FEMALE HOUSING : MG655759(28P), MG655760(36P)

3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY.
①	025 64M PCB HOUSING (HZT)	MG676063	SEE TABLE	SEE TABLE	1
②	025 PCB MALE TM ^L -2.54 PITCH (L)	ST792554-2	BRASS	Sn 후도금 (Reflow)	32
③	025 PCB MALE TM ^L -2.54 PITCH (S)	ST792555-2	BRASS	Sn 후도금 (Reflow)	32

MATERIAL	SEE TABLE	FINISH	SEE TABLE	WIRE RANGE	CLASS	INSULATION	TYPE	PART NO.
							025	MG645803
DR	YSW '13.10.29	CHK	CWK	APP.	CWK	DATE	SCALE	1/1
CHK	WSW '13.10.29	APP.	CWK	'13.10.29			PART NAME	025 64M PCB ASSY(HZT)

KOREA ELECTRIC
TERMINAL CO., LTD.

KET

KOREA ELECTRIC
TERMINAL CO., LTD.