CUSTOMER DRAWING

PART NO. MG645821

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



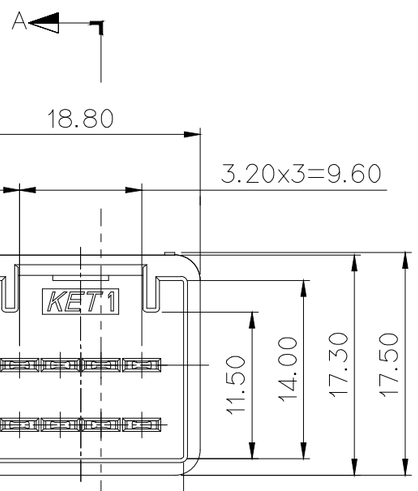

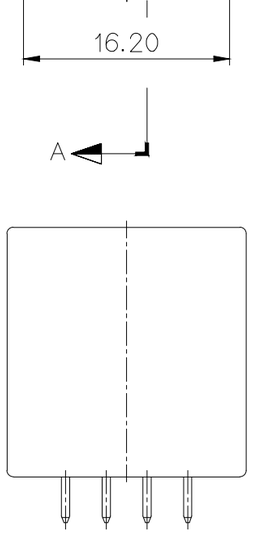

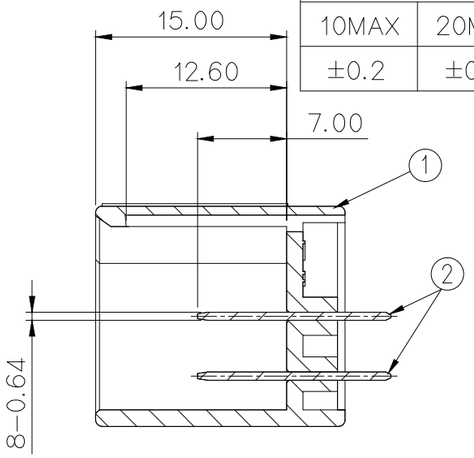

SECTION A-A

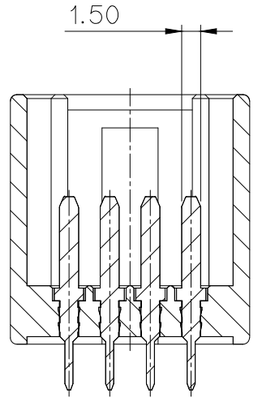

SECTION B-B

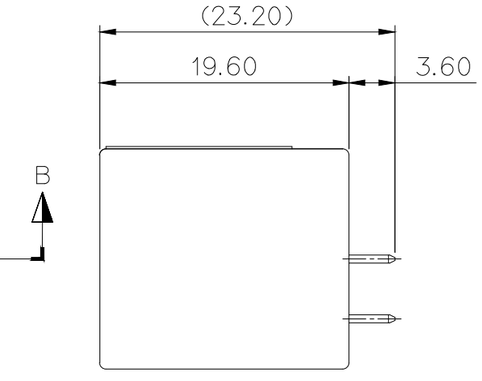

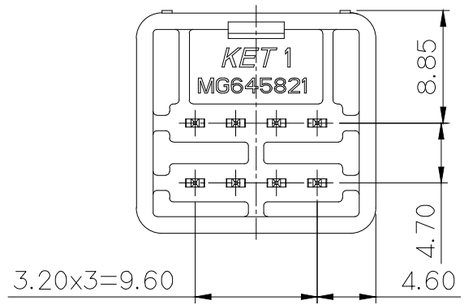

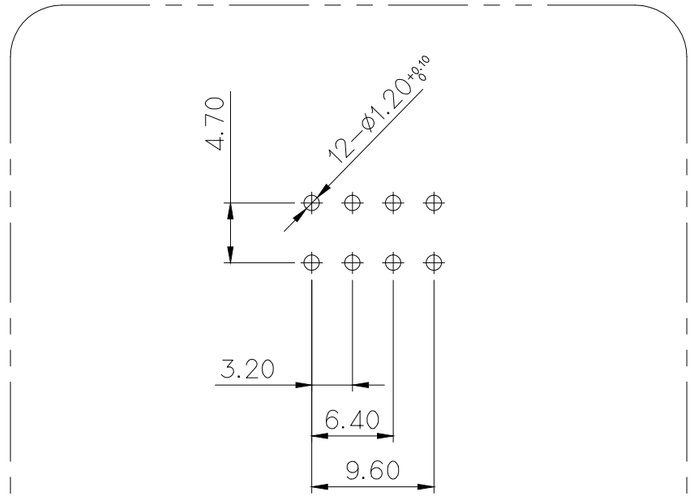

P.C.B. LAYOUT
(GENERAL TOLERANCE : ±0.1)

주 기

1. 기능상 유해한 BURR등 변형이 없을것.
2. 적용 FEMALE HOUSING : MG655603
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
* 0	P B T+GF30	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE FEMALE HOUSING : MG655603
8. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED
2019-11-06
KOREA ELECTRIC TERMINAL CO., LTD.
Korea Electric Terminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	FINISH	QTY.
①	060 8M PCB HS'G (VRT-TYPE B)	MG676124	SEE TABLE	SEE TABLE	1
②	060 PCB MALE TM'L (SS)	ST792486-3	BRASS	PRE-TIN	8

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE
DR.	KTH. '14.01.09	CHK.	CKY. '14.01.13	
CHK.	WSW. '14.01.09	APP.	CWK. '14.01.13	

MATERIAL	SEE TABLE	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	060
INSULATION		TYPE	
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
PART NO.	MG645821		
PART NAME	060 8M PCB ASSY (VRT-TYPE B)		

(DIMENSIONS IN MM)