


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

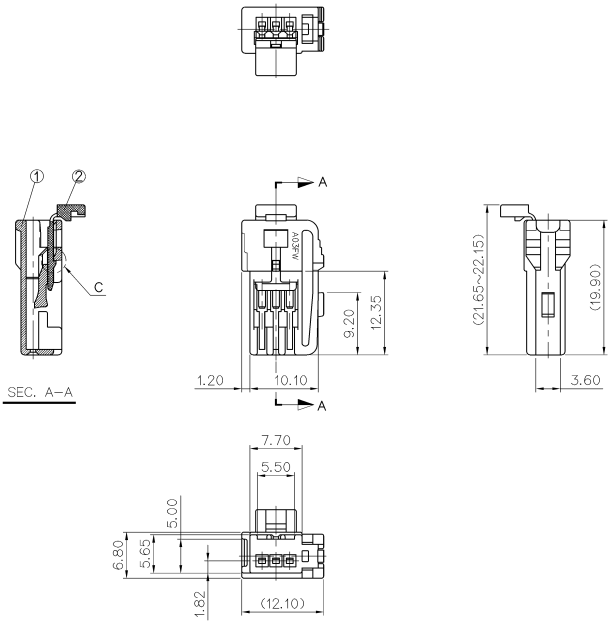

주 기

1. 지시하지 않은 R은 전부 0.5로 함.
2. 기능상 유해한 BURR 및 미성형이 없을것.
3. 상대 HOUSING PART NO. : MG643272
4. 적용 TERMINAL NO. : ST730913/ST730914

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING NO. : MG643272
4. APPLICABLE TERMINAL NO. : ST730913/ST730914

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.	REMARKS
1	91A(030) 3F HS'G	MG671442	PBT	NATURAL	1	
2	91A(030) 3F R/HOLDER	MG671443	NYLON66	NATURAL	1	



ISSUE MARK

MATERIAL		SEE TABLE	KET KOREA ELECTRIC	
FINISH		SEE TABLE	TERMINAL CO., LTD.	
WIRE RANGE		CLASS		
INSULATION		TYPE	7283-8630	
REVISION RECORD		SCALE	PART NO.	
DR.	BIN	991201	MG651444	
CHK.	APP.	DATE	PART NAME	
CHK.	APP.	DATE	91A(030)3F HOUSING ASSY(A03FW)	