


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

②	MG672635-3	A 8P PLUG R/HOLDER <A08FW-R/H>	NYLON66	YELLOW
①	MG672634	A 8P PLUG HOUSING <A08FW>	PBT	NATURAL
NO.	PART NO.	PART NAME	MATERIAL	FINISH

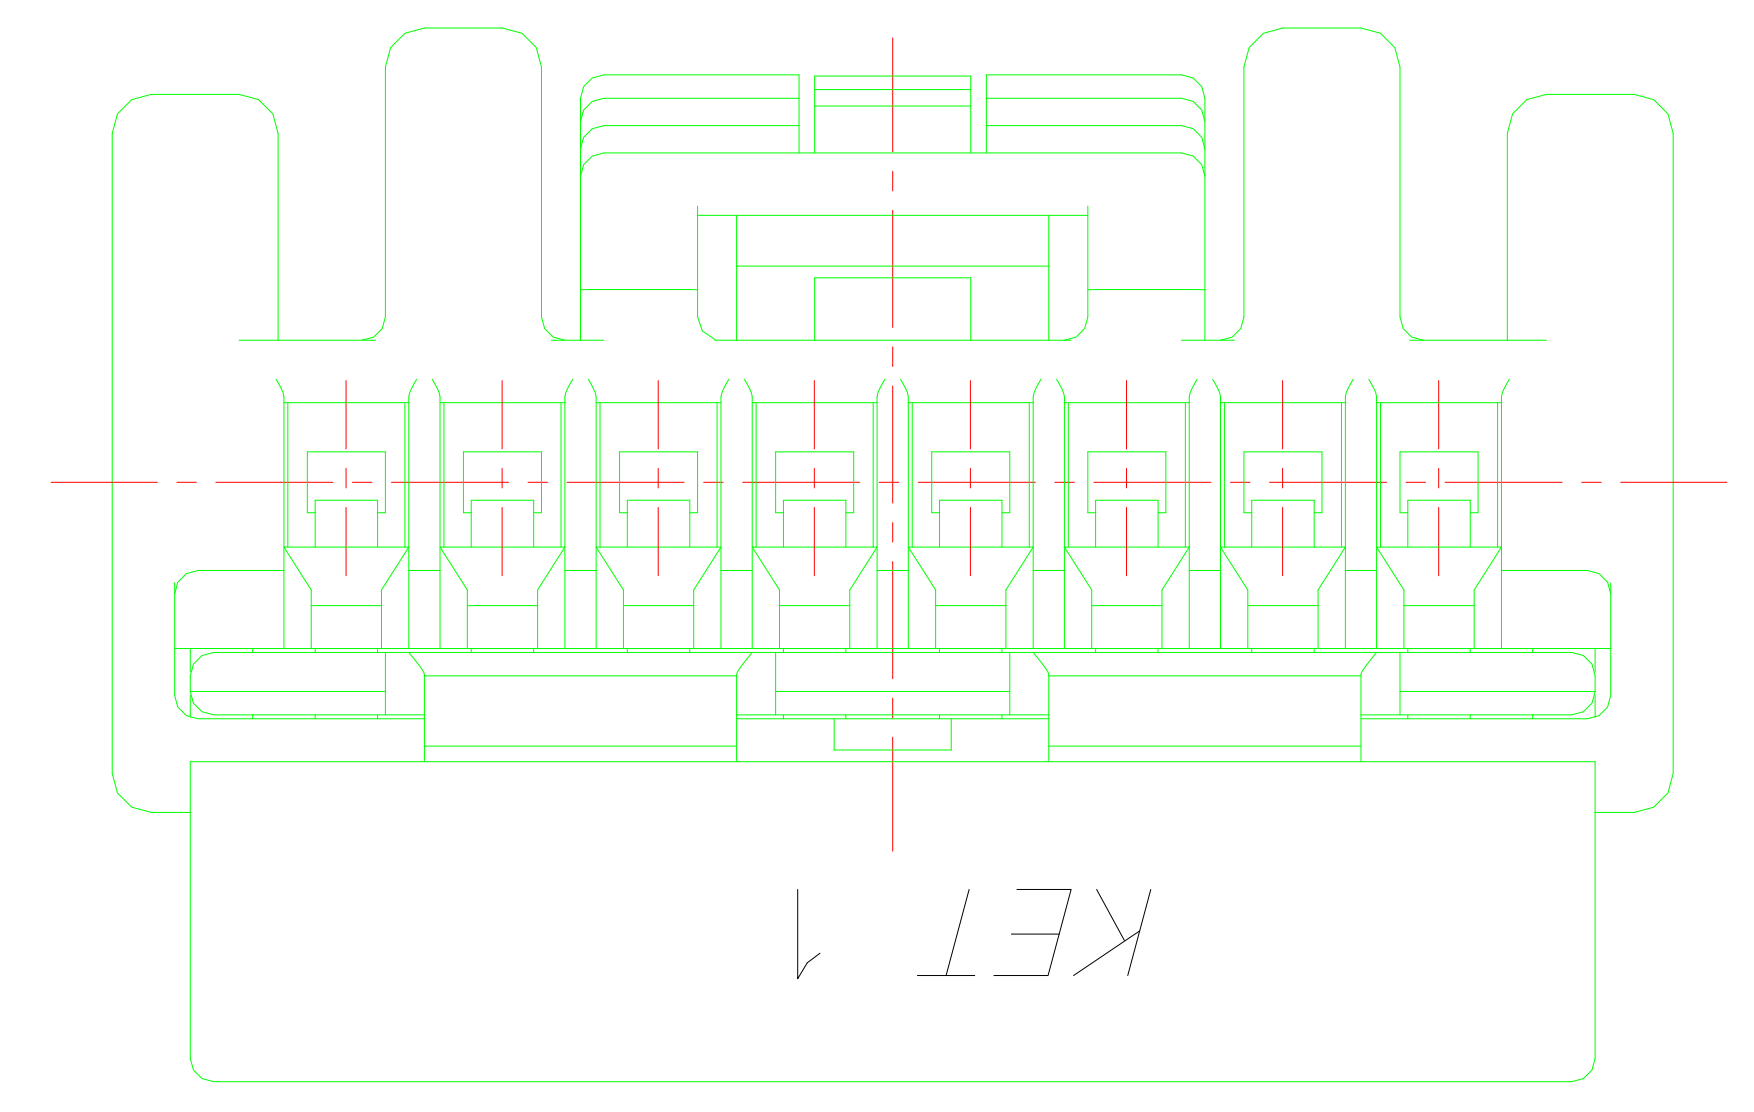

주 기
 1. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
 2. 적용 TERMINAL NO. : ST730913, ST730914
 YA' NO 7116-1670-02, 7116-1670-08, 7116-1800-02

NOTE
 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 2. APPLICABLE TERMINAL NO. : ST730913, ST730914
 YA' NO 7116-1670-02, 7116-1670-08, 7116-1800-02

DIE NO	ISSUE MARK

MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
FINISH	SEE TABLE	
WIRE RANGE		CLASS 91A
INSULATION		TYPE 7283-8281
LTR	ECO-1207-150큰거 재작성	DR. Y.M.K
REVISION RECORD	12.07.23	DATE
DR.	LSY 02.10.09	CHK.
CHK.		APP.
SCALE	5/1	PART NO. MG652633
TOLERANCE EXCEPT AS NOTED	SEE TABLE	PART NAME A 8P PLUG HOUSING ASS'Y <A08FW>
DR.	10/10	
CHK.	10/10	