



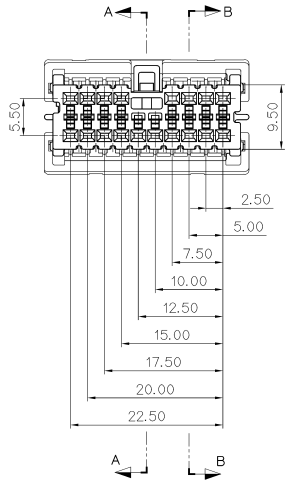



GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG672942	040III 18P FEMALE HS'G	PBT	NATURAL
②	MG672943	040III 18P FEMALE R/HOLDER (A)	PBT	NATURAL
③	MG672944	040III 18P FEMALE R/HOLDER (B)	PBT	NATURAL

주 기

1. 기능상 유해한 BURR 및 미성형이 없을것.
2. 상대 HOUSING PART NO. : MG642941
3. 적용 TERM : ST730770 / ST730960

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG642941
3. APPLICABLE TERMINAL : ST730770 / ST730960



ISSUE MARK

MATERIAL		SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.
FINISH		SEE TABLE	
WIRE RANGE			CLASS 040III
INSULATION			TYPE
LTR	REVISION RECORD	DR	PART NO. MG652945
DR	KYM 2004.01.30	CHK	
CHK	2/1	APP	
SCALE		2/1	
PART NAME		040III 18P FEMALE ASS'Y	