
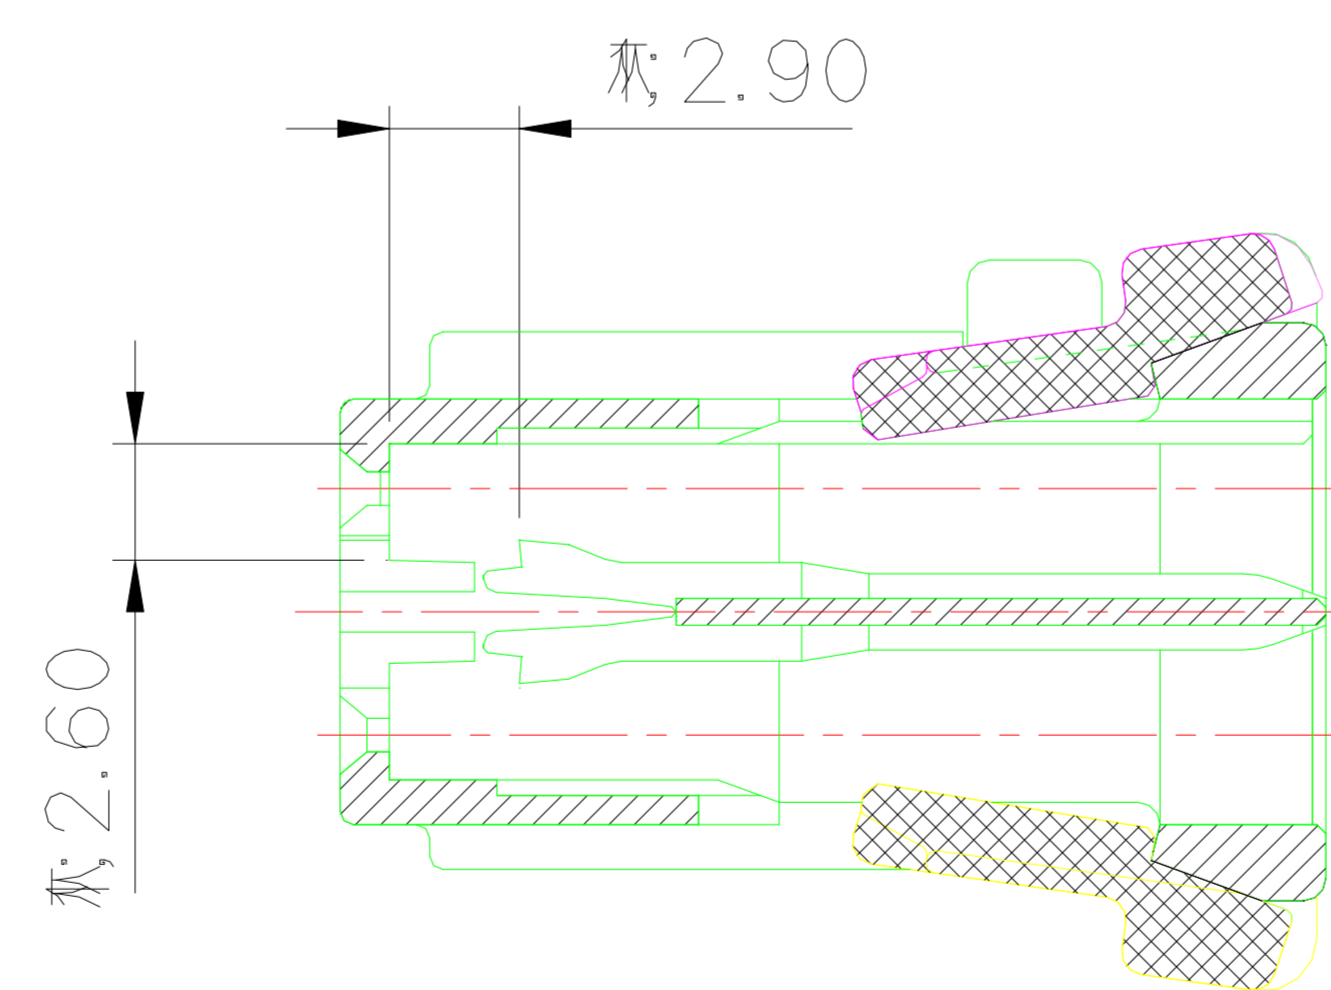
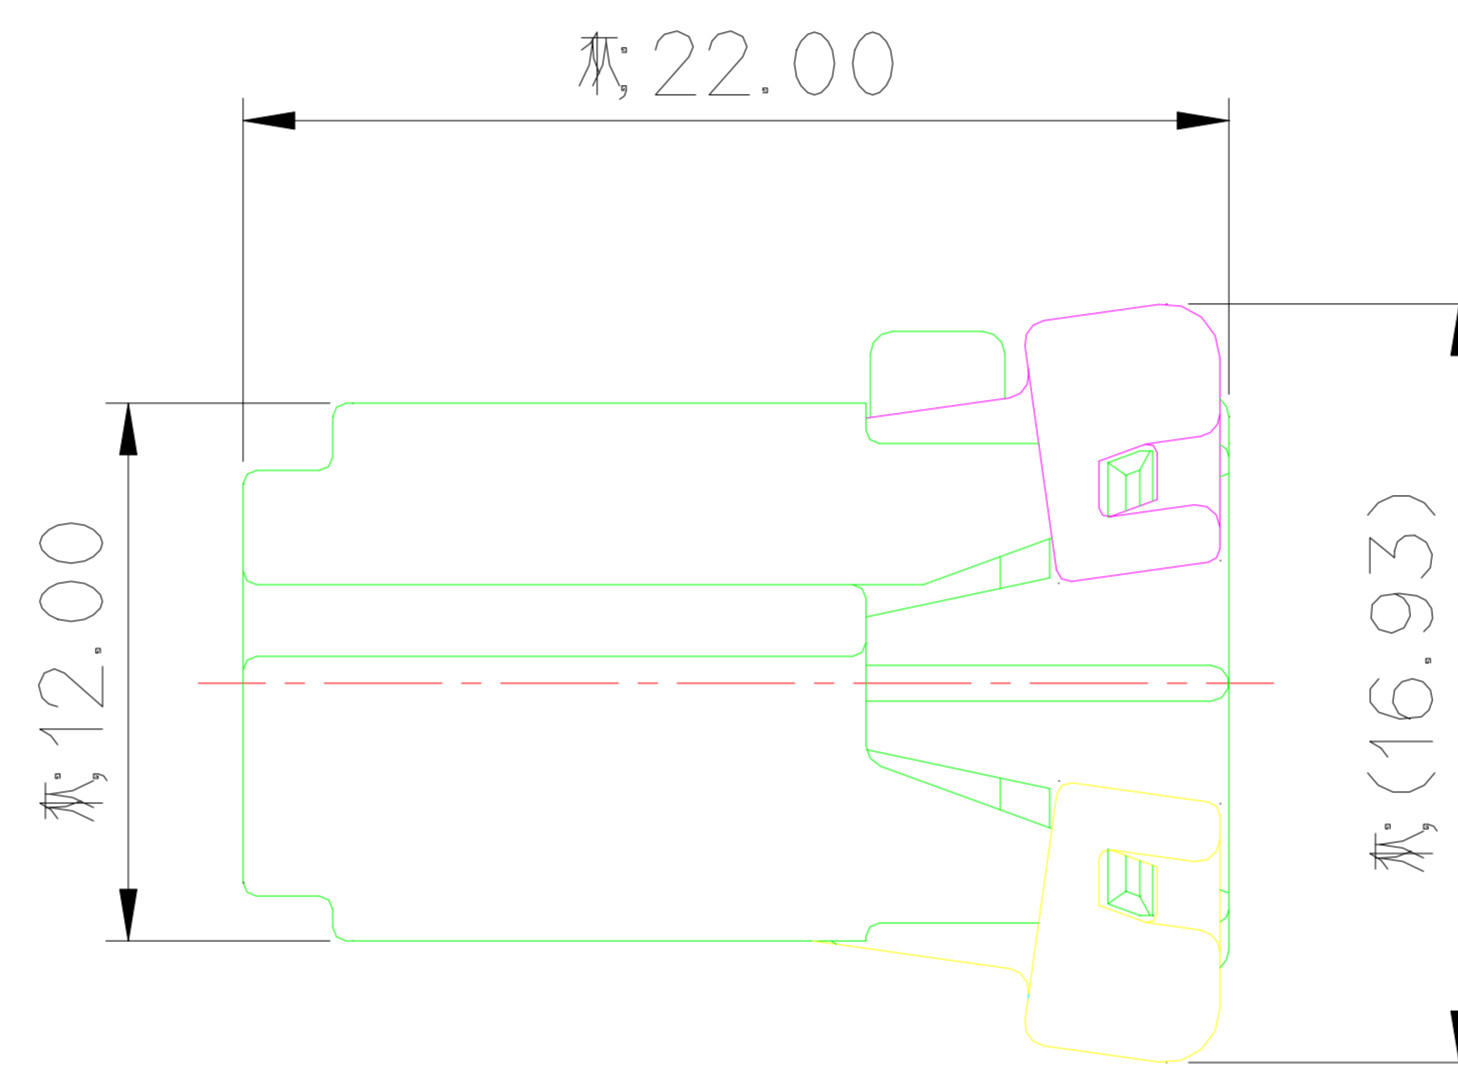
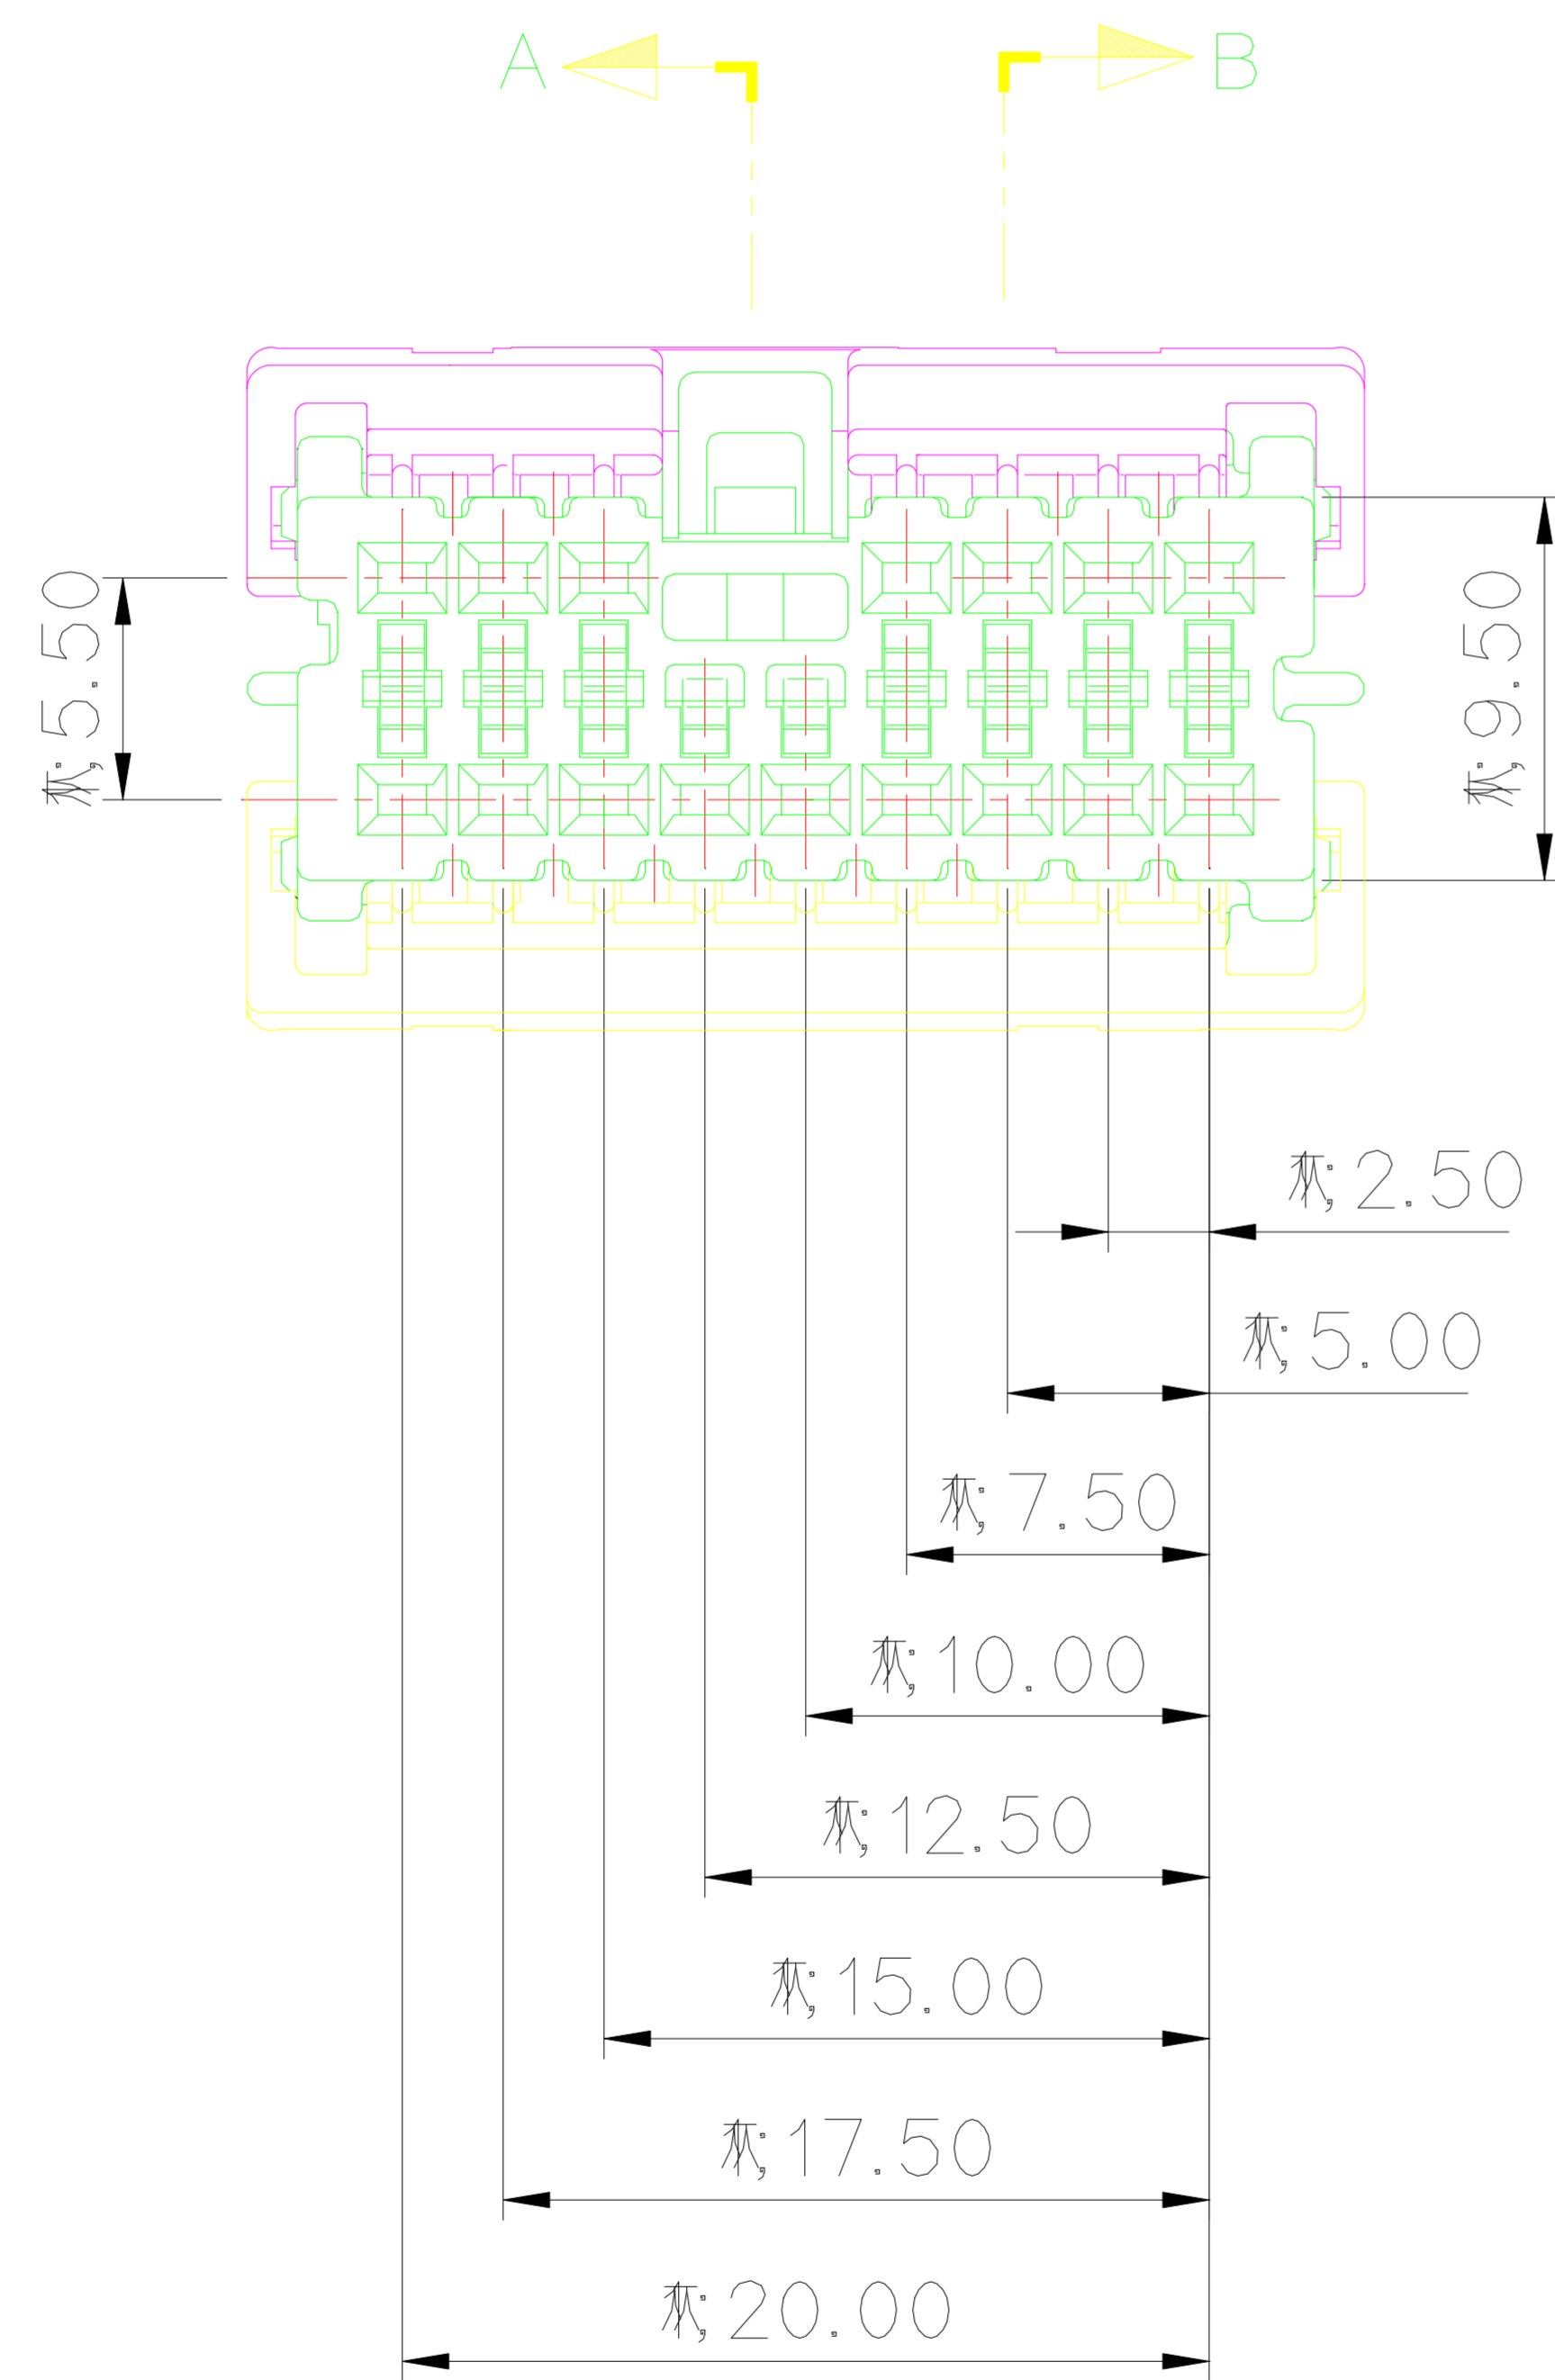
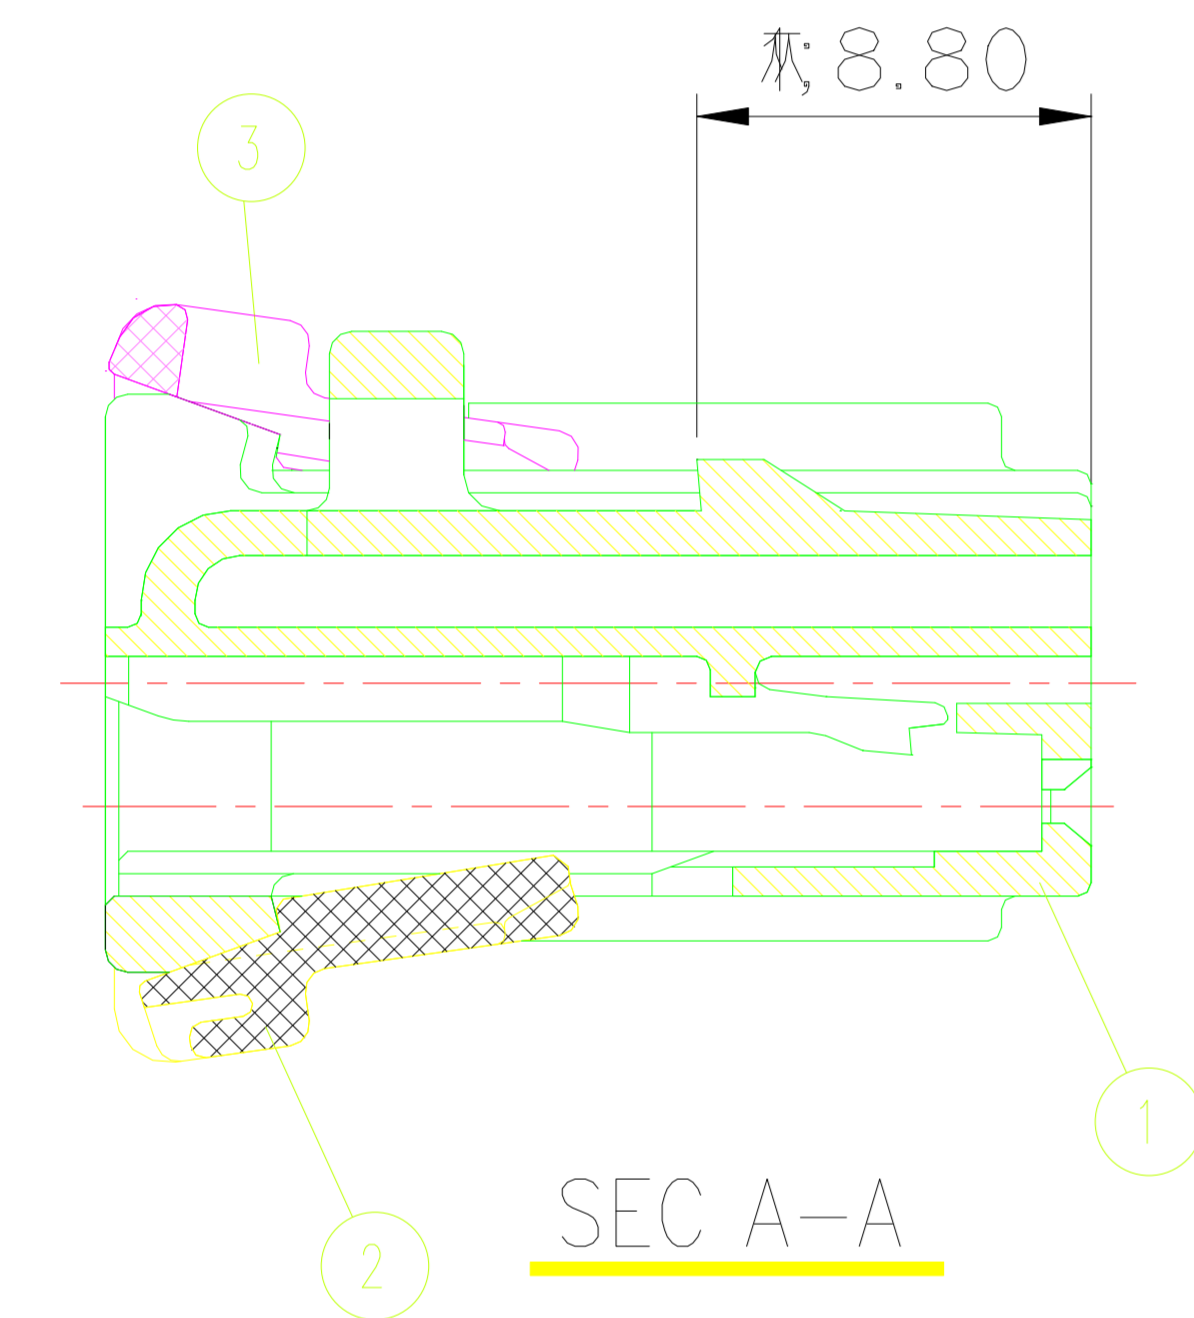


GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

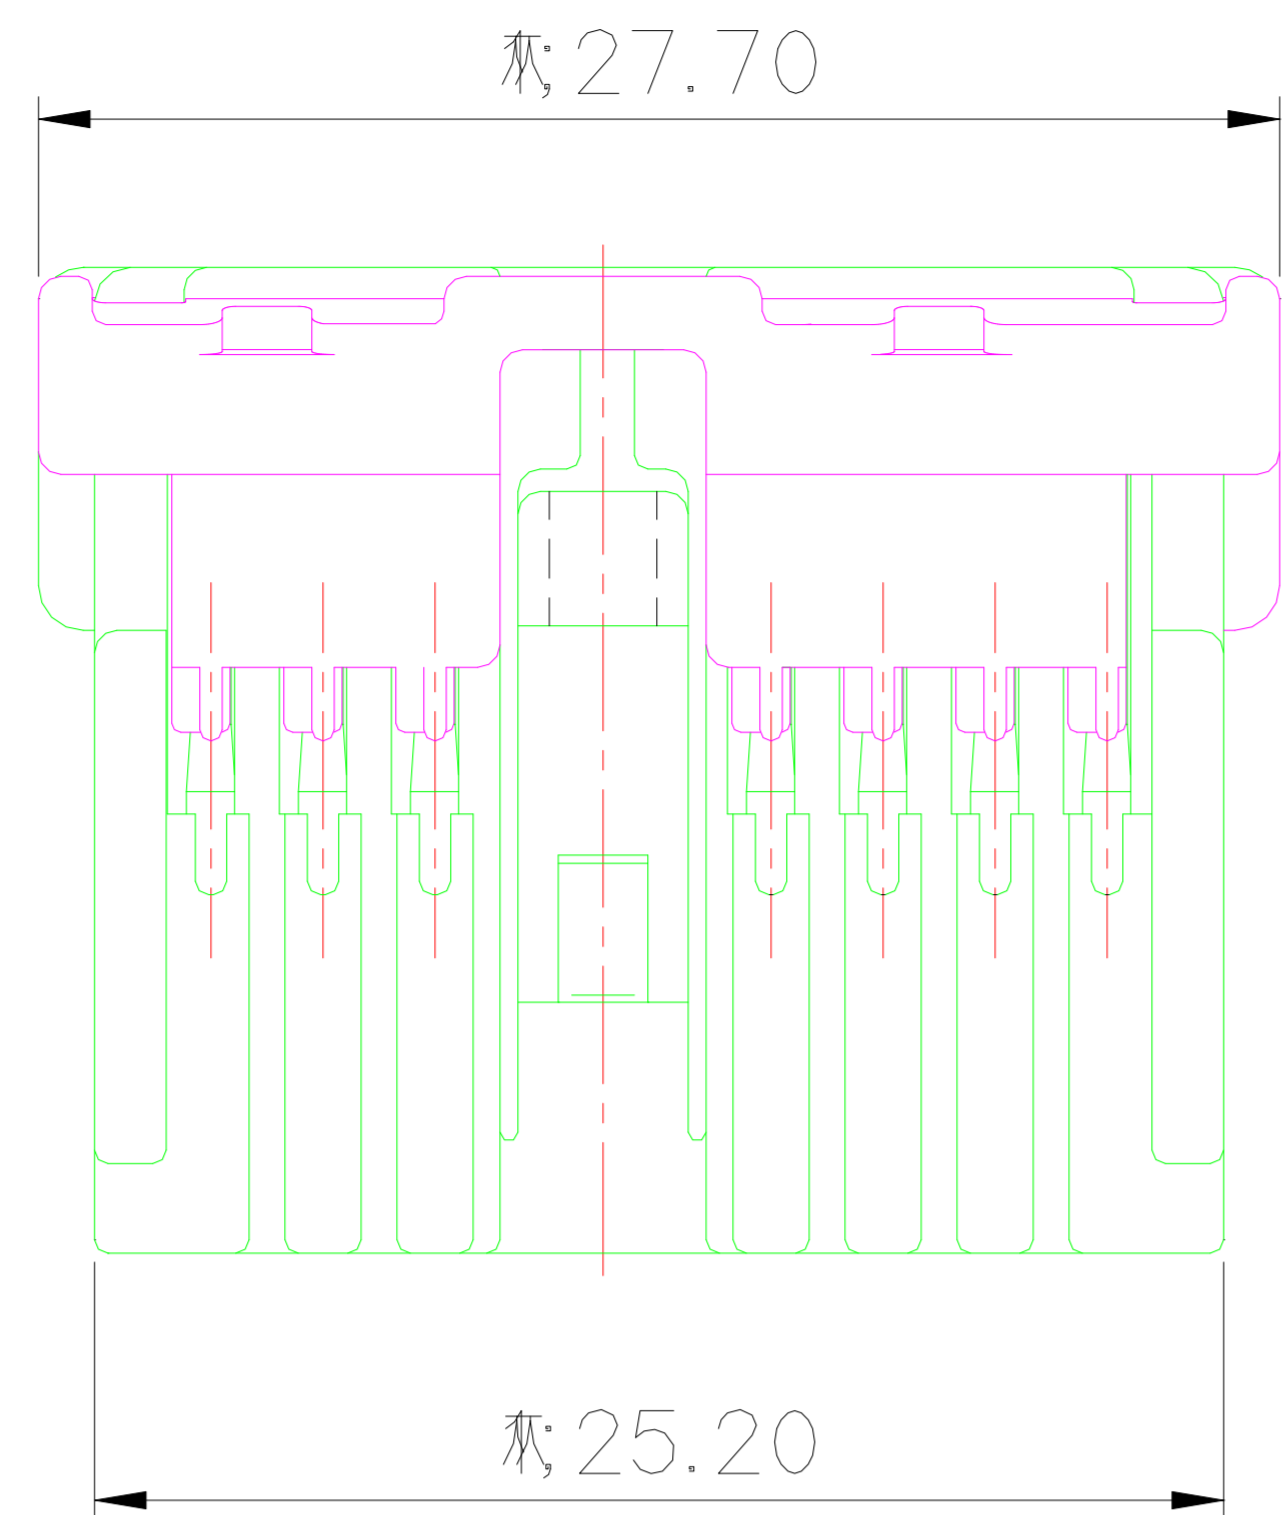

주 기

- 기능상 유해한 BURR 및 미성형이 없을것.
- 상대 HOUSING PART NO. : MG643016
- 적용 TERM' : ST730770 / ST730960

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG643016
- APPLICABLE TERMINAL : ST730770 / ST730960



ISSUE MARK

				MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE		CLASS 040III
				INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE
						SCALE 2/1
DR.	KYM 2004.01.30	CHK.				PART NO. MG653019
CHK.	01.30	APP.		01.30		PART NAME 040III 16P FEMALE ASS'Y