

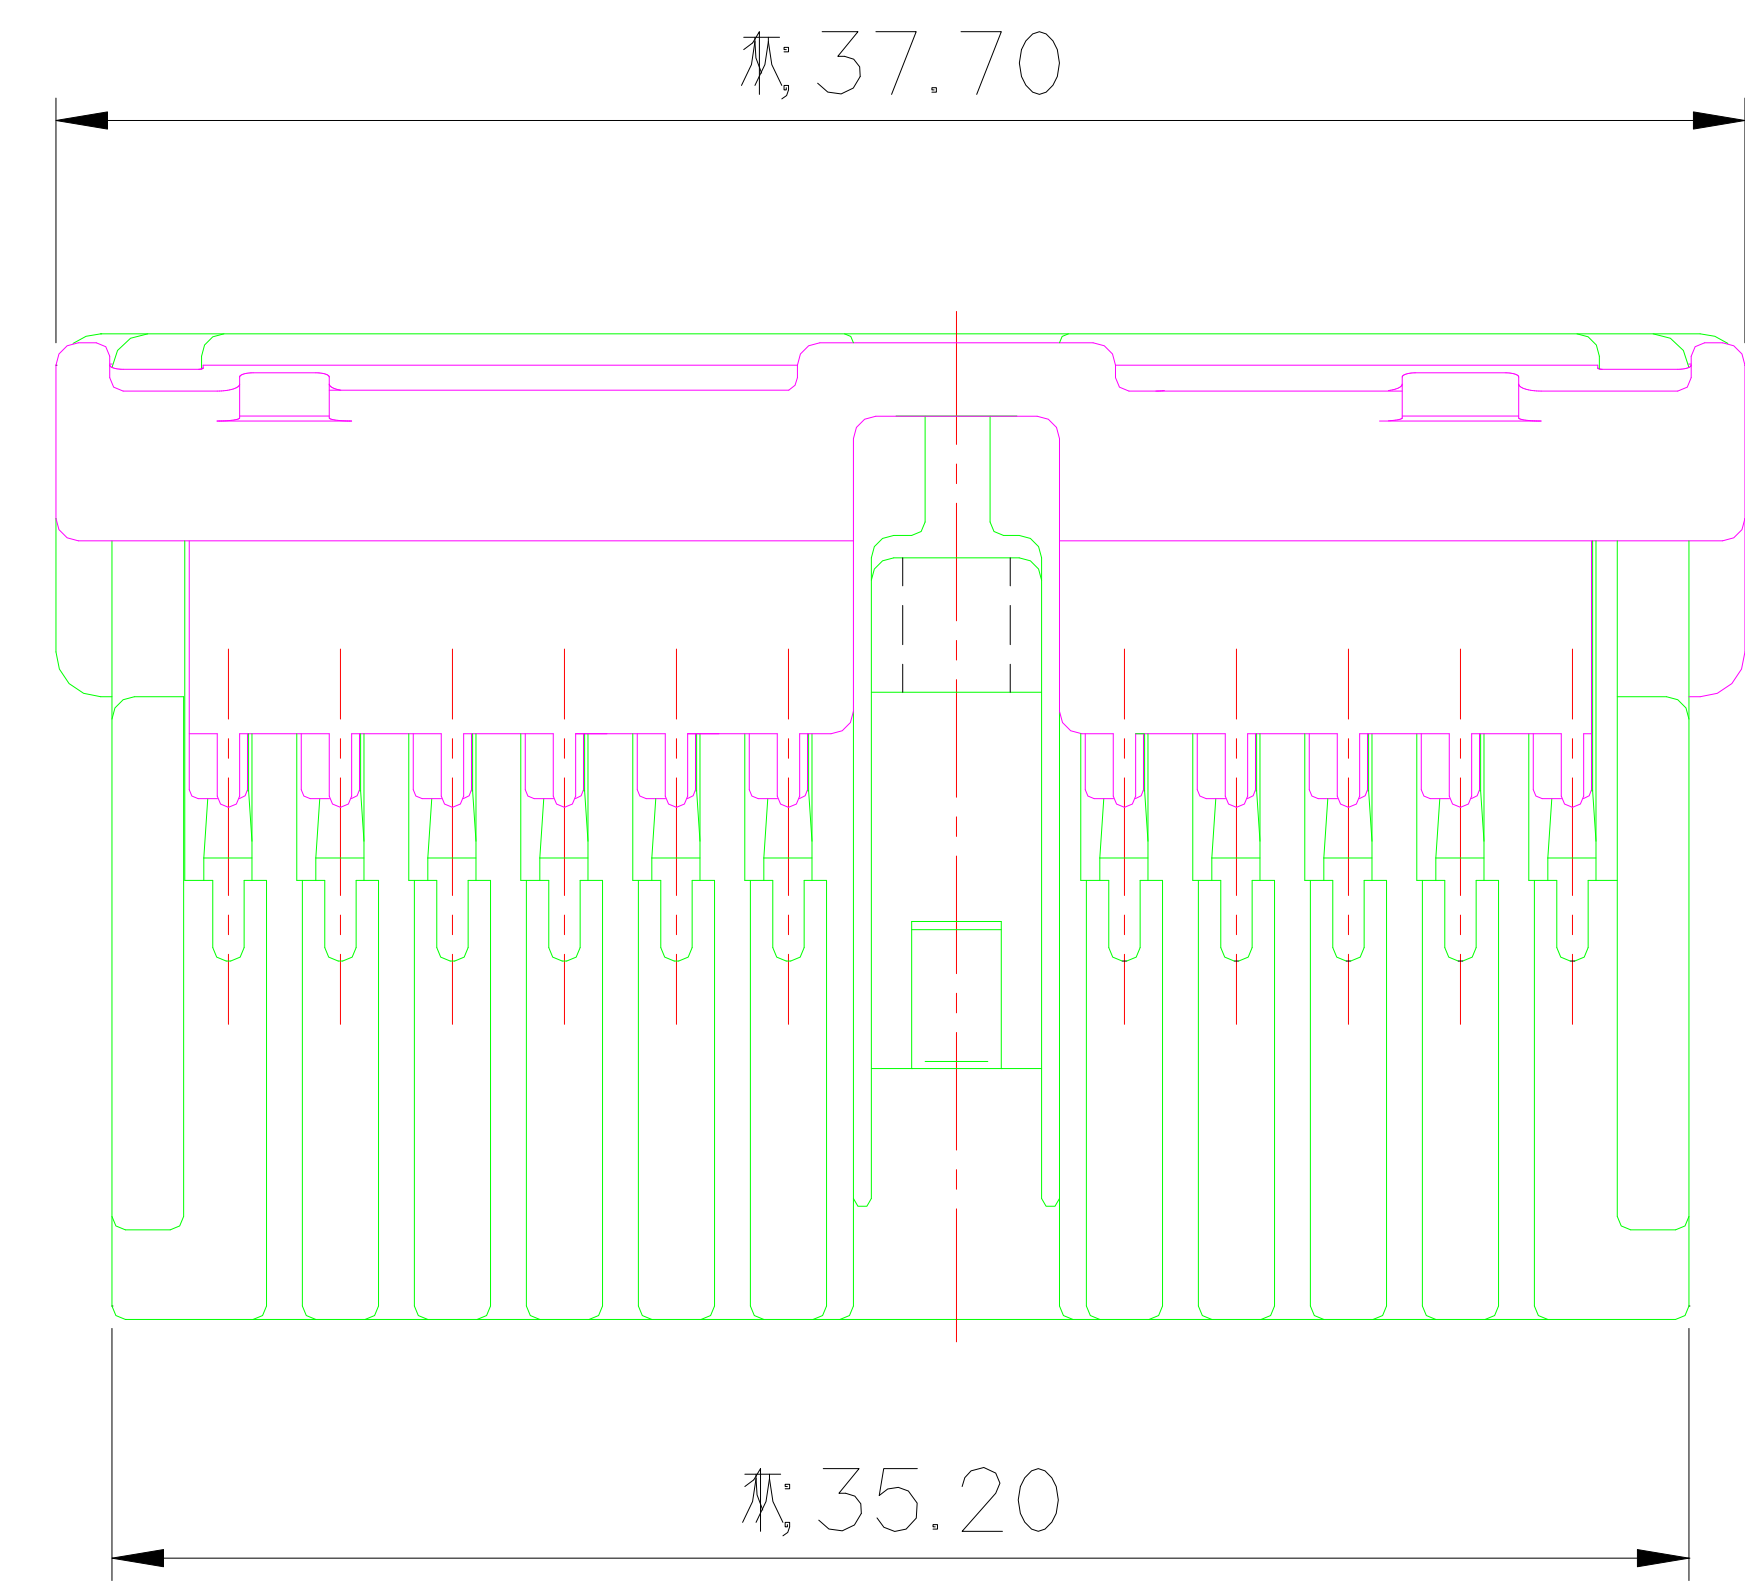
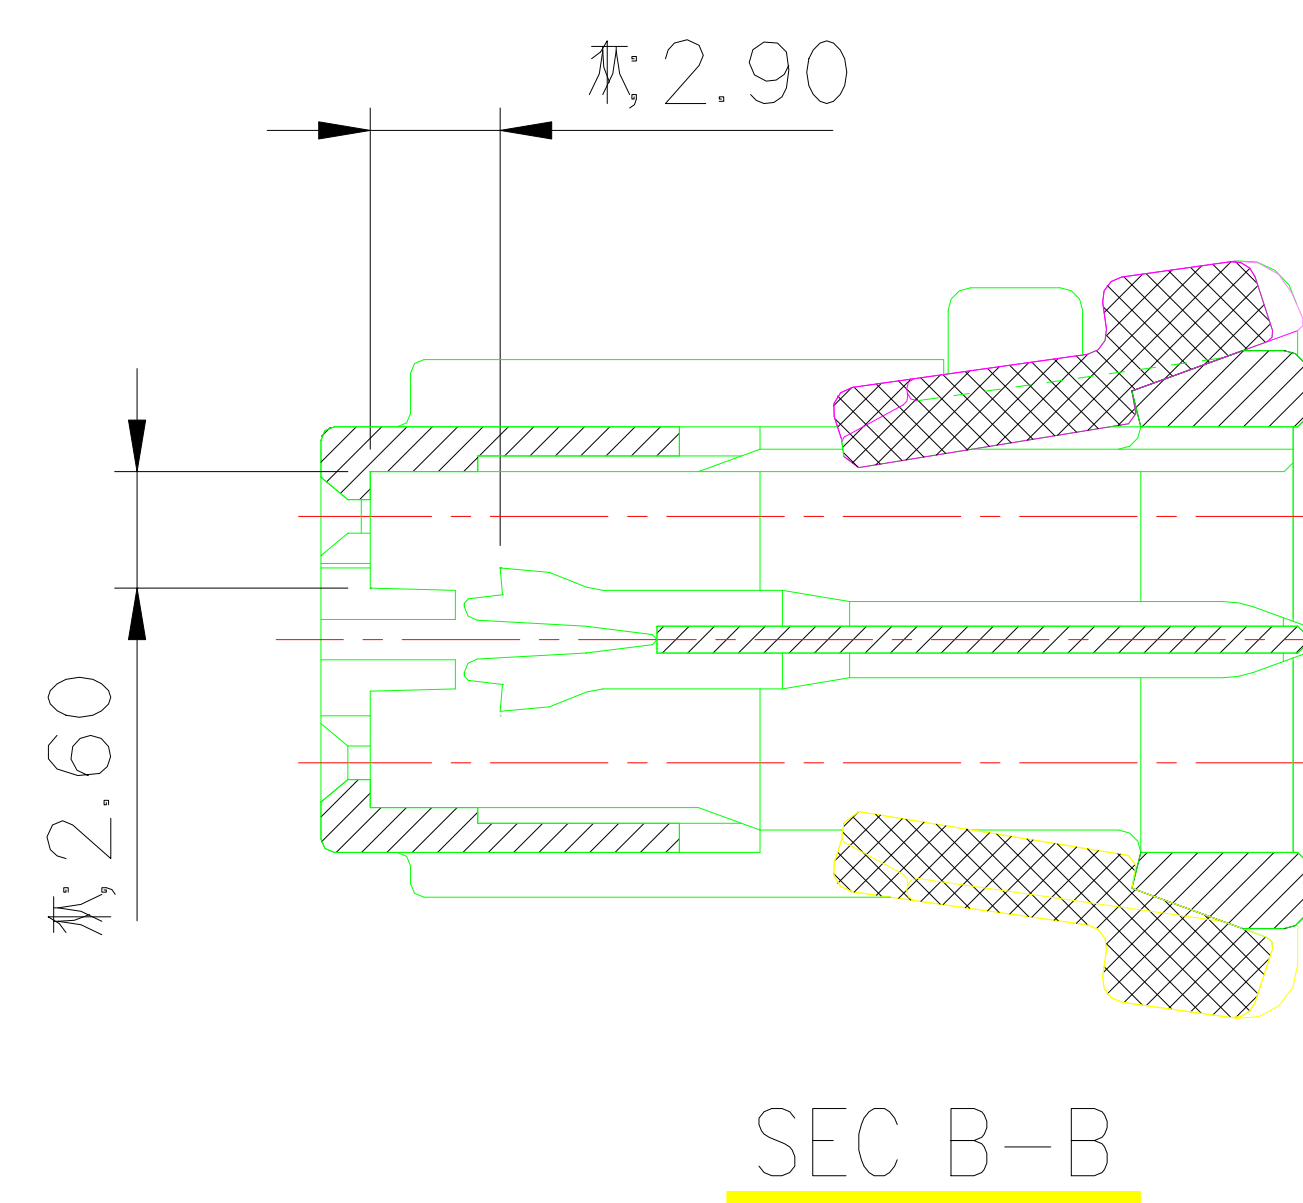
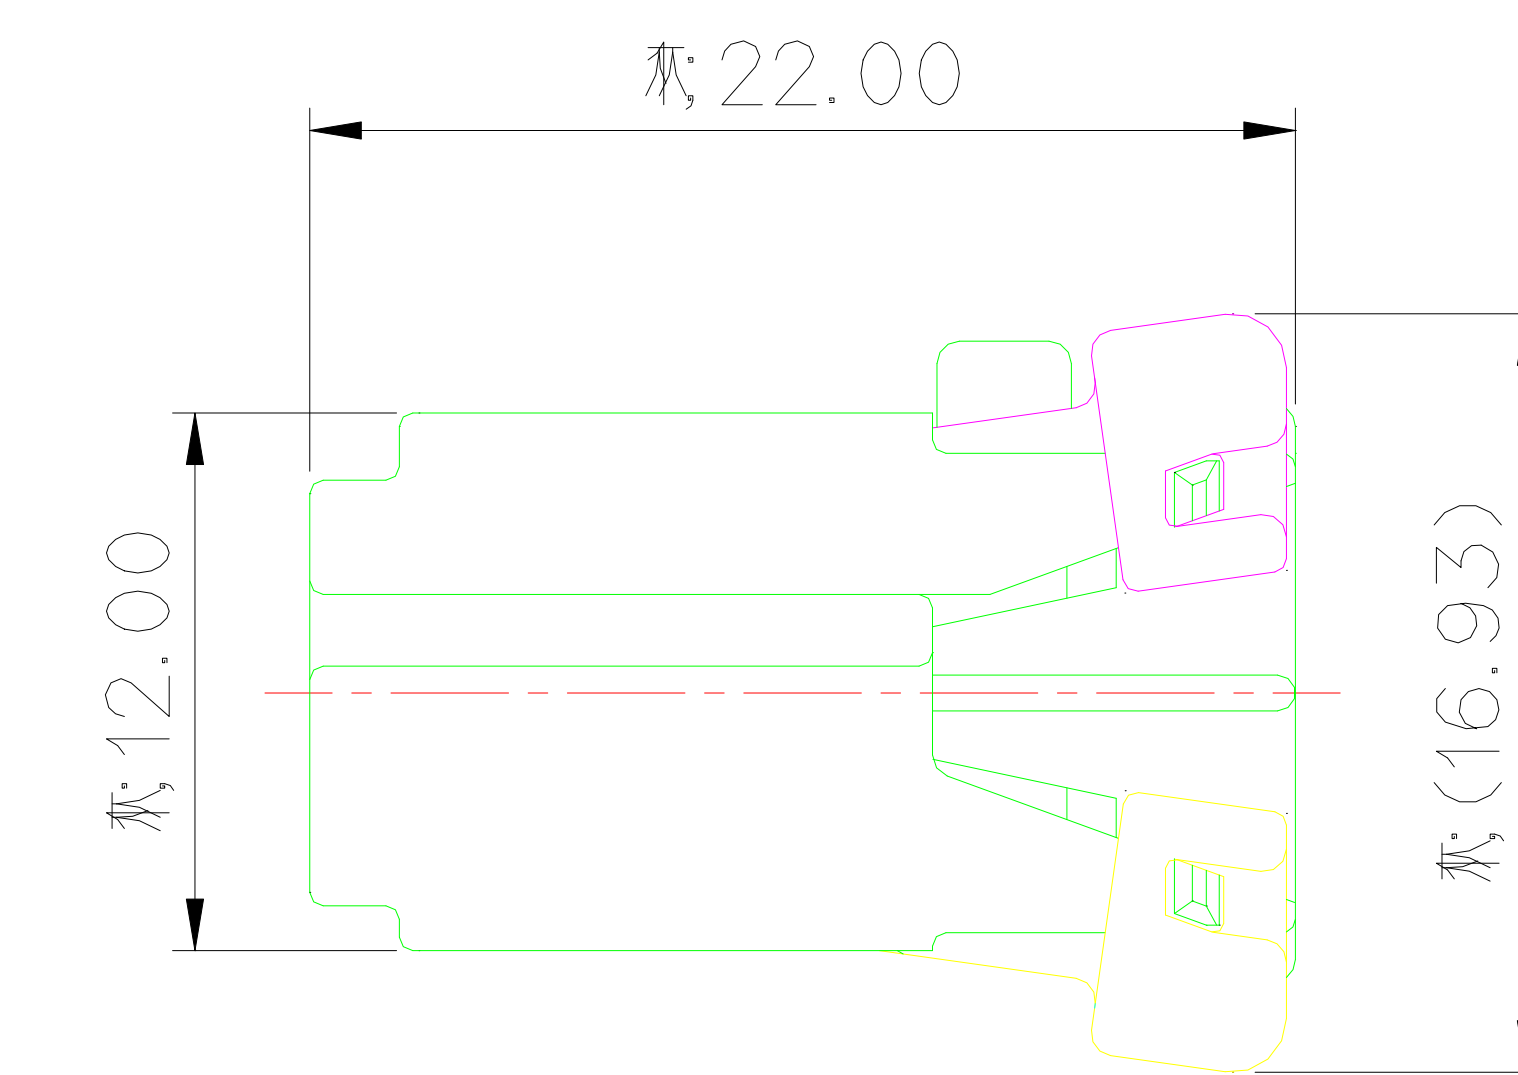


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

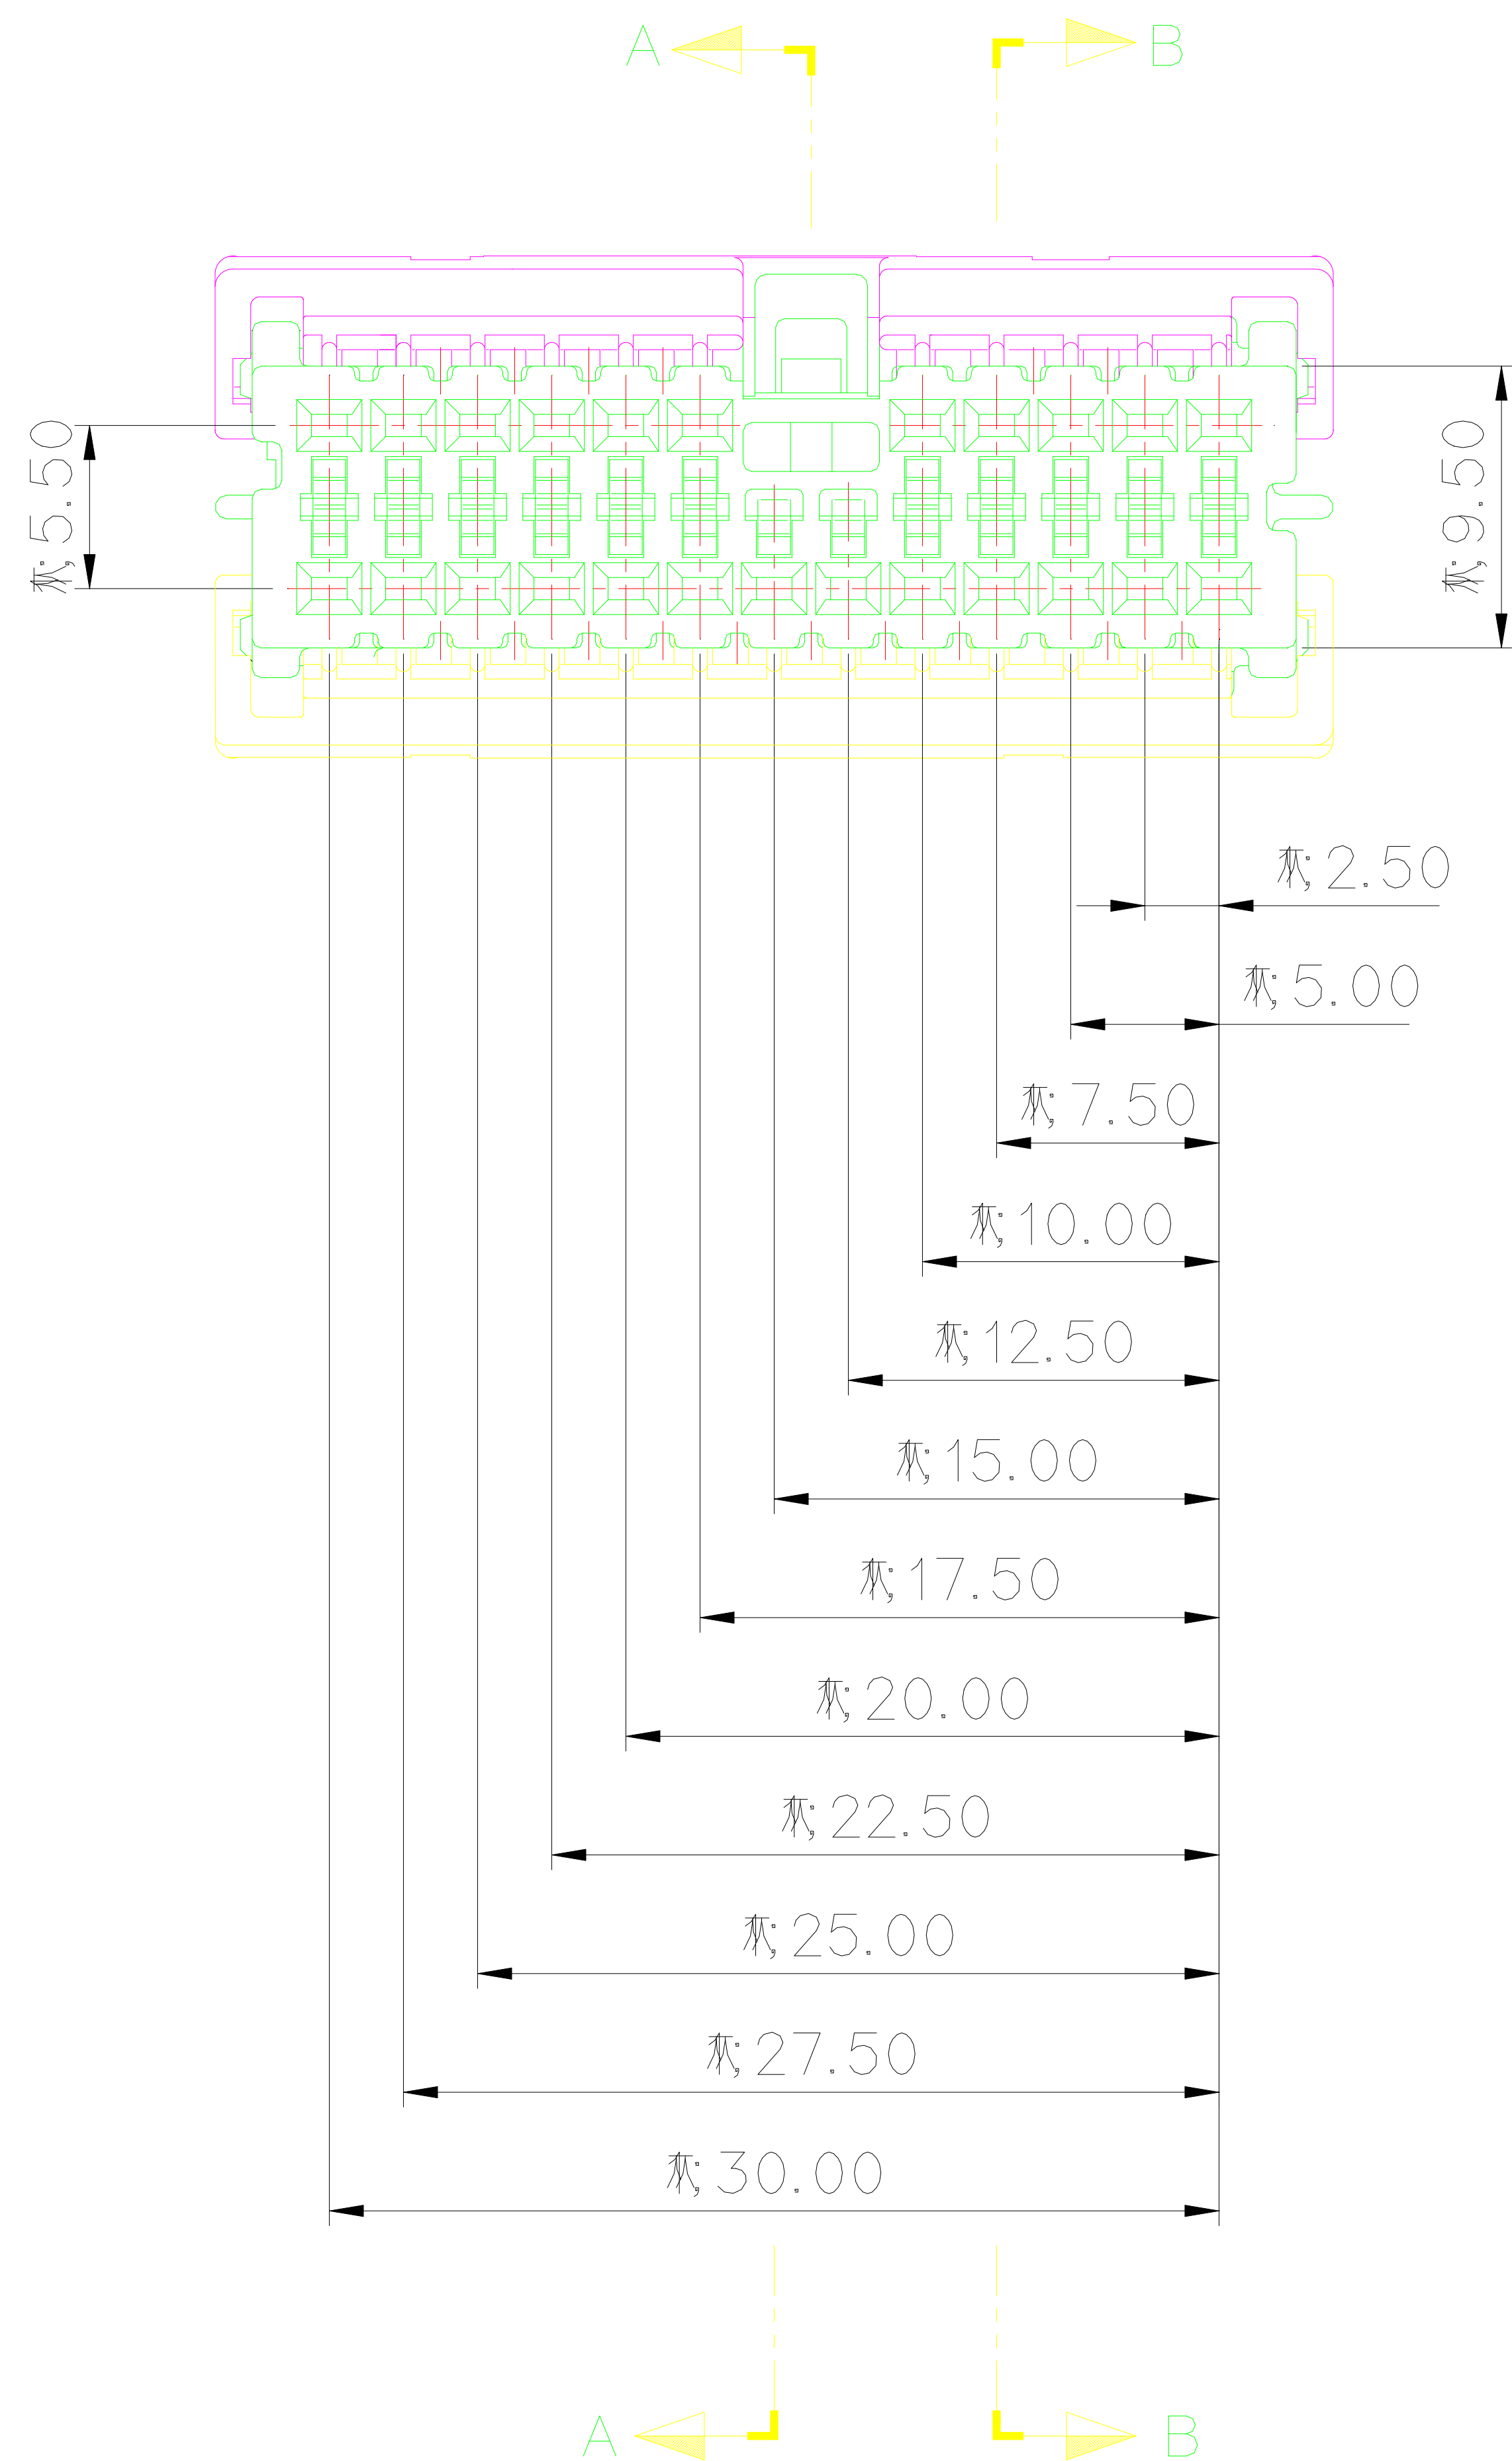

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG673034	040III 24P FEMALE HS'G	PBT	NATURAL
②	MG673035	040III 24P FEMALE R/HOLDER (A)	PBT	NATURAL
③	MG673036	040III24P FEMALE R/HOLDER (B)	PBT	NATURAL

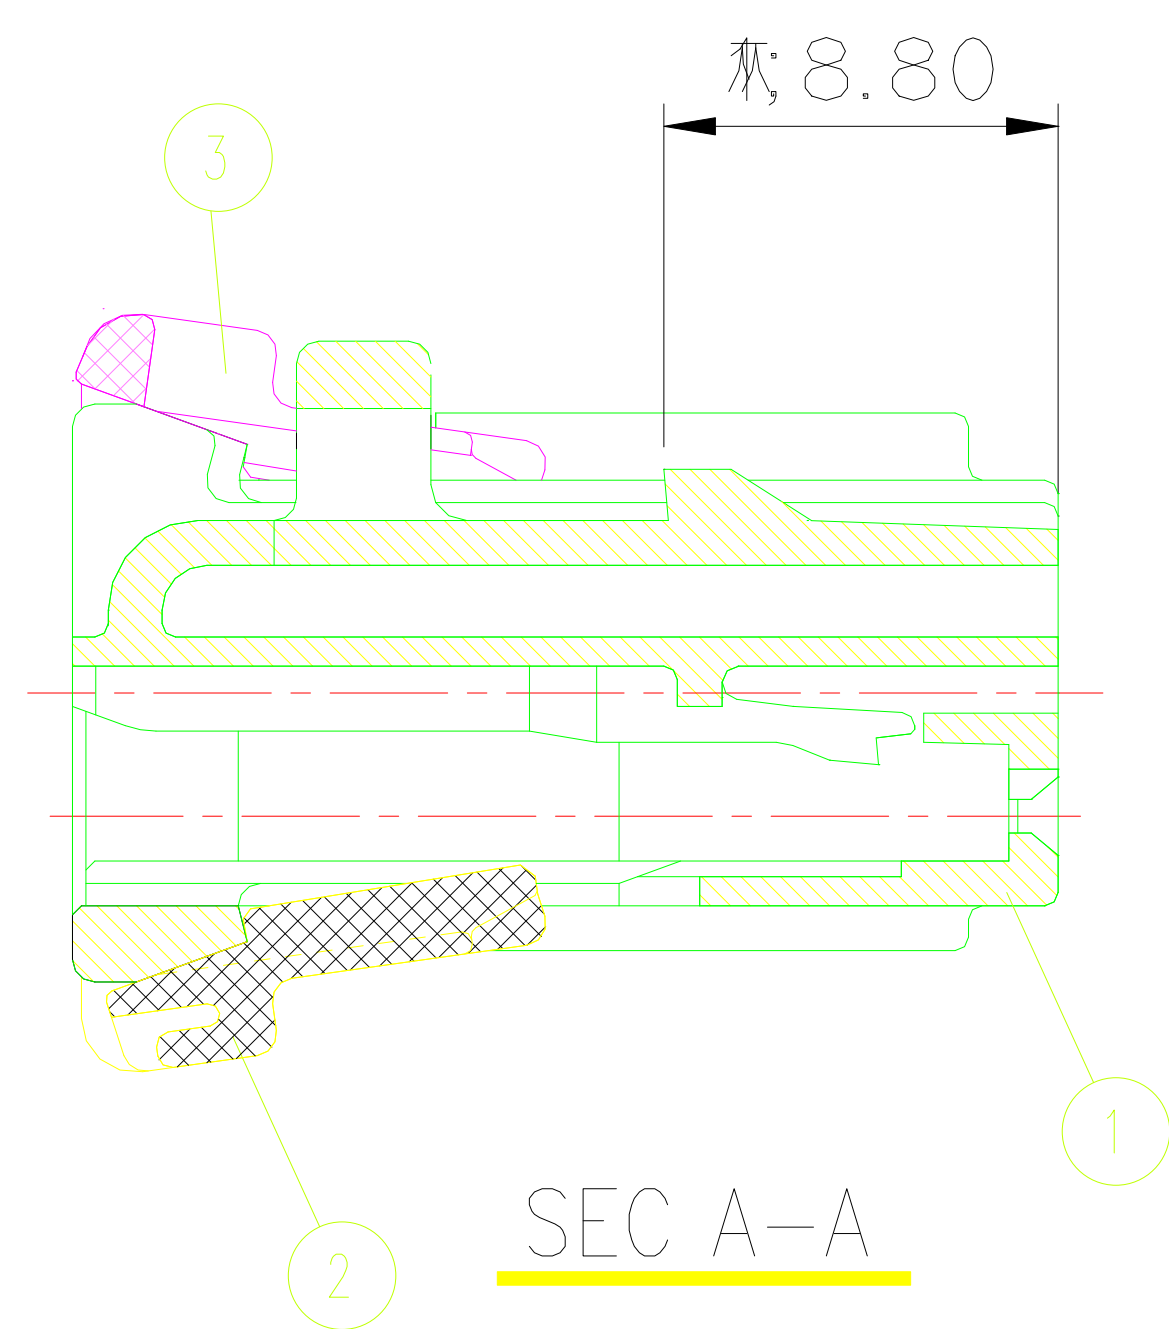

주 기

- 기능상 유해한 BURR 및 미성형이 없을것.
- 상대 HOUSING PART NO. : MG643030
- 적용 TERM' : ST730770 / ST730960

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG643030
- APPLICABLE TERMINAL : ST730770 / ST730960



ISSUE MARK

		MATERIAL		SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.		
		FINISH		SEE TABLE			
		WIRE RANGE		CLASS	040III		
		INSULATION		TYPE			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
						SEE TABLE	
DR.	KYM 2004.01.30	CHK.				SCALE 2/1	
CHK.	01.30	APP.			01.30	PART NO. MG653033	
						PART NAME 040III 24P FEMALE ASS'Y	