


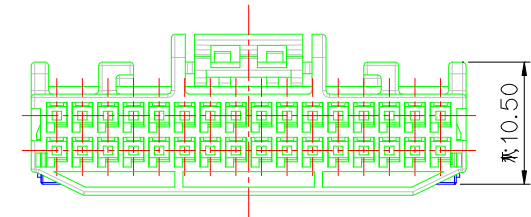

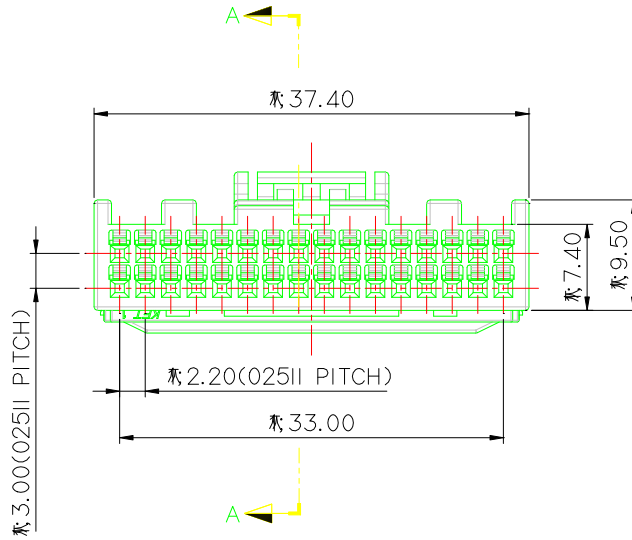



ISO VIEW

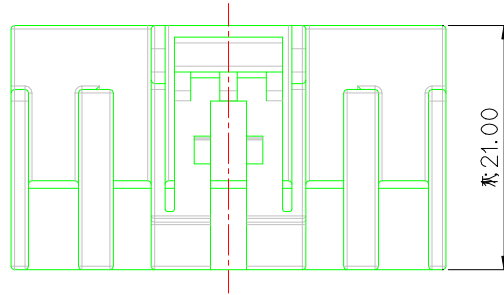

SECTION A-A

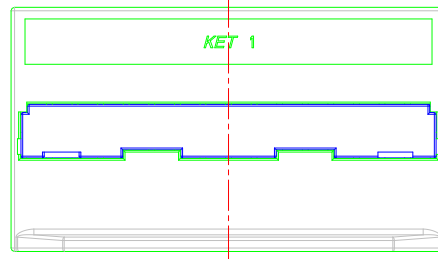

GENERAL TOLERANCE (HOUSING)

10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	USED ON
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(025II) : ST731374-3, ST731375-3
적용 CONNECTOR : MG644920-3, MG645055
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(025II) : ST731374-3, ST731375-3
APPLICABLE CONNECTOR : MG644920-3, MG645055
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2015-06-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development
Team 1

ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG675909	025II 32F HOUSING	PBT	NATURAL
②	MG675910-41	025II 32F SPACER	PBT	L/GRAY

MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	
INSULATION		TYPE 025II	
LTR	REVISION RECORD	DR.	DATE
DR.	CHOI. 2012.12.20	CHK.	KMH. 12.12.20
CHK.	CWK. 12.12.20	APP.	HSJ. 12.12.20
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	PART NO.
		1/1	MG655709
PART NAME		025II 32F ASSY	