
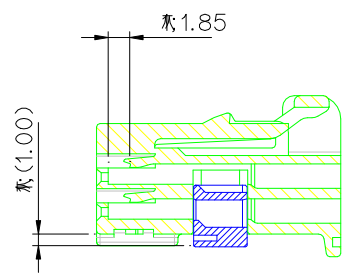
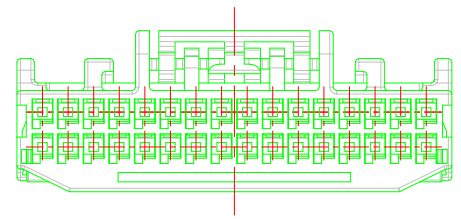



ISO VIEW


GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL(025II) : ST731374-3, 1375-3
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

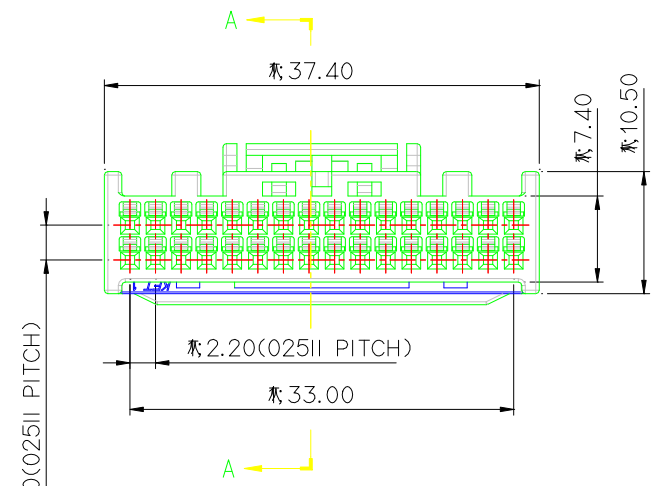

SECTION A-A

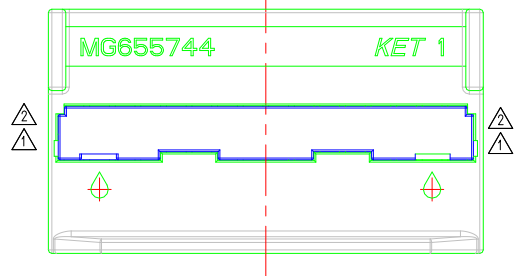

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL(025II) : ST731374-3, 1375-3
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED
 2015-06-25
 KOREA ELECTRIC
 TERMINAL CO., LTD.
 Connector Development Team 1

ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG676014	025II 32F HOUSING	PBT	NATURAL
②	MG675910-41	025II 32F SPCAER	PBT	L/GRAY

						MATERIAL	SEE TABLE	KOREA ELECTRIC	
						FINISH	SEE TABLE	TERMINAL CO., LTD.	
						WIRE RANGE		CLASS	
						INSULATION		TYPE 025II	
LTR	REVISION	RECORD	DR.	CHK.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO.
			JH.K	WDH	-	LSY	15.04.23	SEE TABLE	MG655744
			JCM	WDH	KMH	LSY	14.07.30	SCALE 1/1	
			WDH	KMH	-	HJB	14.04.18	PART NAME	025II 32F ASSY(SJB)
			DR.	CHK.	CHK.	APP.	DATE		
			WDH	CHK.	CWK		2014.01.16		

