

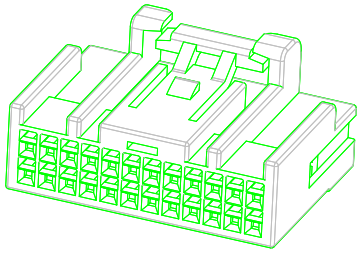
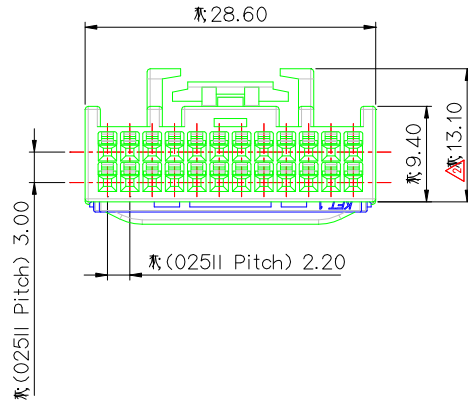


PART NO. MG655761

CUSTOMER DRAWING



ISO VIEW


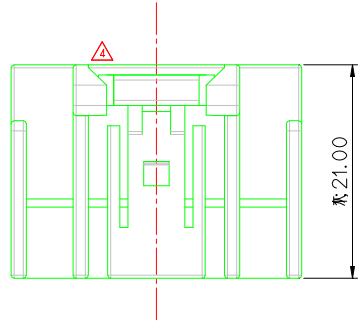


※(025II Pitch) 3.00

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	125MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

주 기


1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL(025II) : ST731374, 1375-3
- △ 3. 상대 HOUSING : MG644918, MG644100, MG645739
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
* 3		YELLOW
4		GRAY
40		DARK GRAY
* 41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST731374, 1375-3
3. MATCHING HOUSING : MG644918, MG644100, MG645739
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
1	025II 24F HOUSING	MG676074-41	PBT	L/GRAY	1
△1	025II 24F HOUSING	MG676074-3	PBT	YELLOW	1
2	025II 24F SPACER	MG676075	PBT	NATURAL	1

ISSUE MARK

APPROVED

△ ECO-1505-137 역거 도면 재작성	HSR	CKY	CWK	15.06.03	MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.	
△ ECO-1504-414 역거 도면 재작성	HSR	-	CWK	15.04.24	FINISH	SEE TABLE			
△ ECO-1410-220 역거 도면 재작성	HSR	CKY	CWK	14.10.29	WIRE RANGE		CLASS	025II	
△ ECO-1403-057 역거 도면 재작성	HSR	LSJ	CWK	14.06.26	INSULATION		TYPE		
△ ECO-1312-266 역거 도면 재작성	HSR	WSW	CWK	14.01.07	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1	
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	PART NO.	MG655761
DR.	HSR	2013.10.22	CHK.						
CHK.	WSW	2013.10.22	APP.	CWK	2013.10.22				
PART NAME								025II 24F ASSY	

2015-06-25  
KOREA ELECTRIC TERMINAL CO., LTD.  
Korea Electric Terminal Co., Ltd.

DIMENSIONS IN MM