


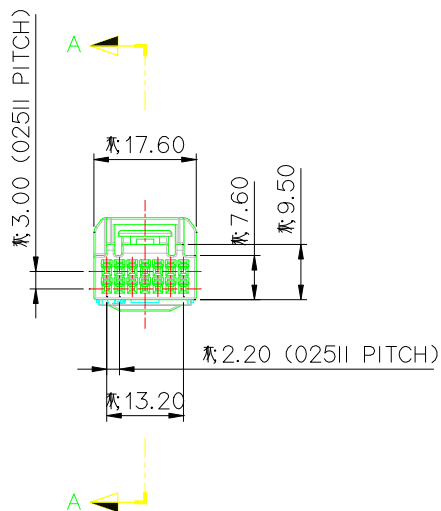




ISO VIEW



SECTION A-A

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL (025II) : ST731374, ST731375
3. 적용 CONNECTOR : MG645818-5, MG645819-4
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL(025II) : ST731374, ST731375
3. MATCHING CONNECTOR : MG645818-5, MG645819-4
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

**APPROVED**  
2015-06-25  
KOREA ELECTRIC  
TERMINAL CO., LTD.  
Product Development Team 1

ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG676120	025II 14F JOINT HOUSING	PBT	NATURAL
②	MG676121-4	025II 14F JOINT SPACER	PBT	GRAY

MATERIAL	SEE TABLE		KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	025II
INSULATION		TYPE	
LTR	REVISION RECORD	DR. CHK.	APP. DATE
DR.	KYJ. 2013.12.04	CHK.	CKY 12/04
CHK.	WSW 12/04	APP.	CWK 12/04
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	1/1
PART NAME	025II 14F JOINT ASSY		
PART NO.	MG655772		

