


REF ID: MG655827

CUSTOMER DRAWING

REFERENCE NO

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
①	060 8F HOUSING	MG676328	SEE TABLE	SEE TABLE	1
②	060 8F SPACER	MG676329-3	PBT	YELLOW	1

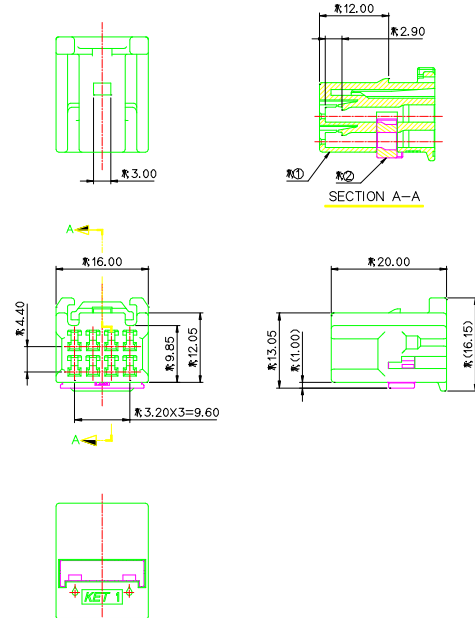

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	125MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731334,731335,731336
- MATCHING HOUSING : MG645883
- SPACER IS SUPPORT WITH THE 1st LOCK CONDITION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없도록.
- 적용 TERMINAL : ST731334,731335,731336
- 상대 HOUSING : MG645883
- SPACER는 1차 LOCK 상태로 유지, 공급할 것.
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, BPDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



ISSUE MARK

MATERIAL		SEE TABLE	KOR EA ELECTRIC	
FINISH		SEE TABLE	TERMINAL CO., LTD.	
WIRE RANGE		CLASS	060	
INSULATION		TYPE		
DR. LJV '14.12.31	CHK. YSW '14.12.31	SCALE	PART NO. MG655827	
SEE TABLE		2/1		
PART NAME		060 8F ASSY		