

GENERAL TOLERANCE (HOUSING)

USED ON


10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE
±0,15	±0,20	±0,30	±0,40	±0,50	±0,75	±0,90	±1,40	±30'

주기

- 1, 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
- 2, 적용 TERMINAL ; ST731374, ST731375
- 3, 상대물 HOUSING ; MG646091
- 4, 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다,

NOTE

- 1, MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2, APPLICABLE TERMINAL ; ST731374, ST731375
- 3, APPLICABLE FEMALE HOUSING ; MG646091
- 4, 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHOULD NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

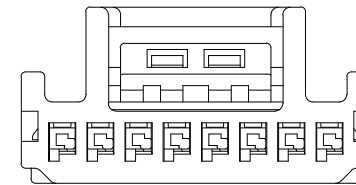

NO.	MATERIAL	COLOR
* 0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8	LIGHT GREEN	
9	MAGENTA	
11	ORANGE	

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	COLOR	Q'TY
1	02511 8F HOUSING	MG676877	SEE TABLE	SEE TABLE	1
2	02511 8F SPACER	MG676878-3	PBT	YELLOW	1

MATERIAL	SEE TABLE	KET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE		
WIRE RANGE		CLASS	025
INSULATION		TYPE	비방수
LTR	REVISION RECORD	DR, CHK, APP, DATE	TOLERANCE EXCEPT AS NOTED
DR, JDR 2017.01.19	CHK,		SCALE 2/1
CHK, SSH 2017.01.23	APP, BIN 2017.01.23	PART_NAME	PART NO. MG656924
			02511 8F ASSY