

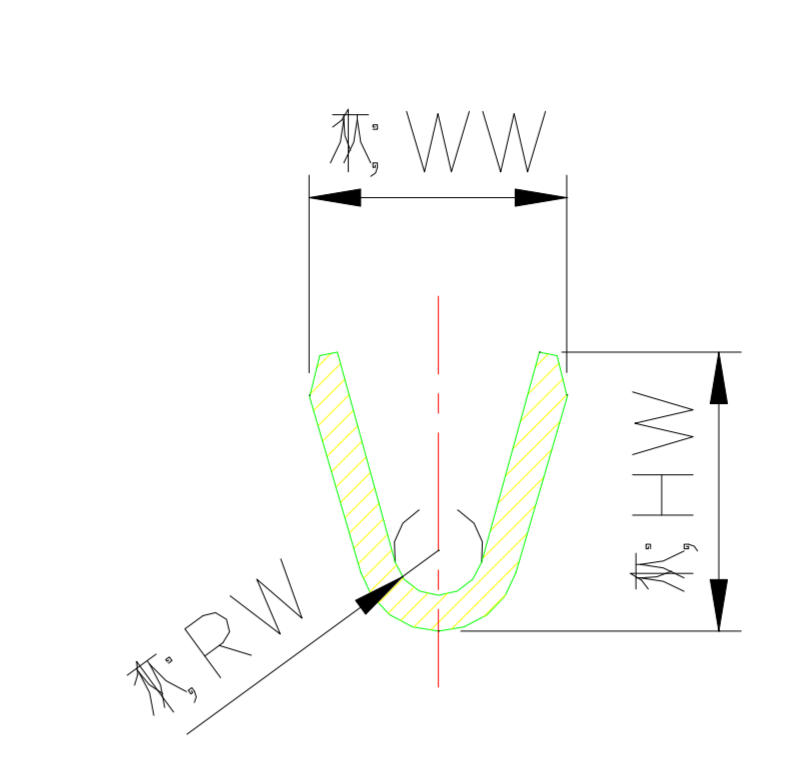




GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

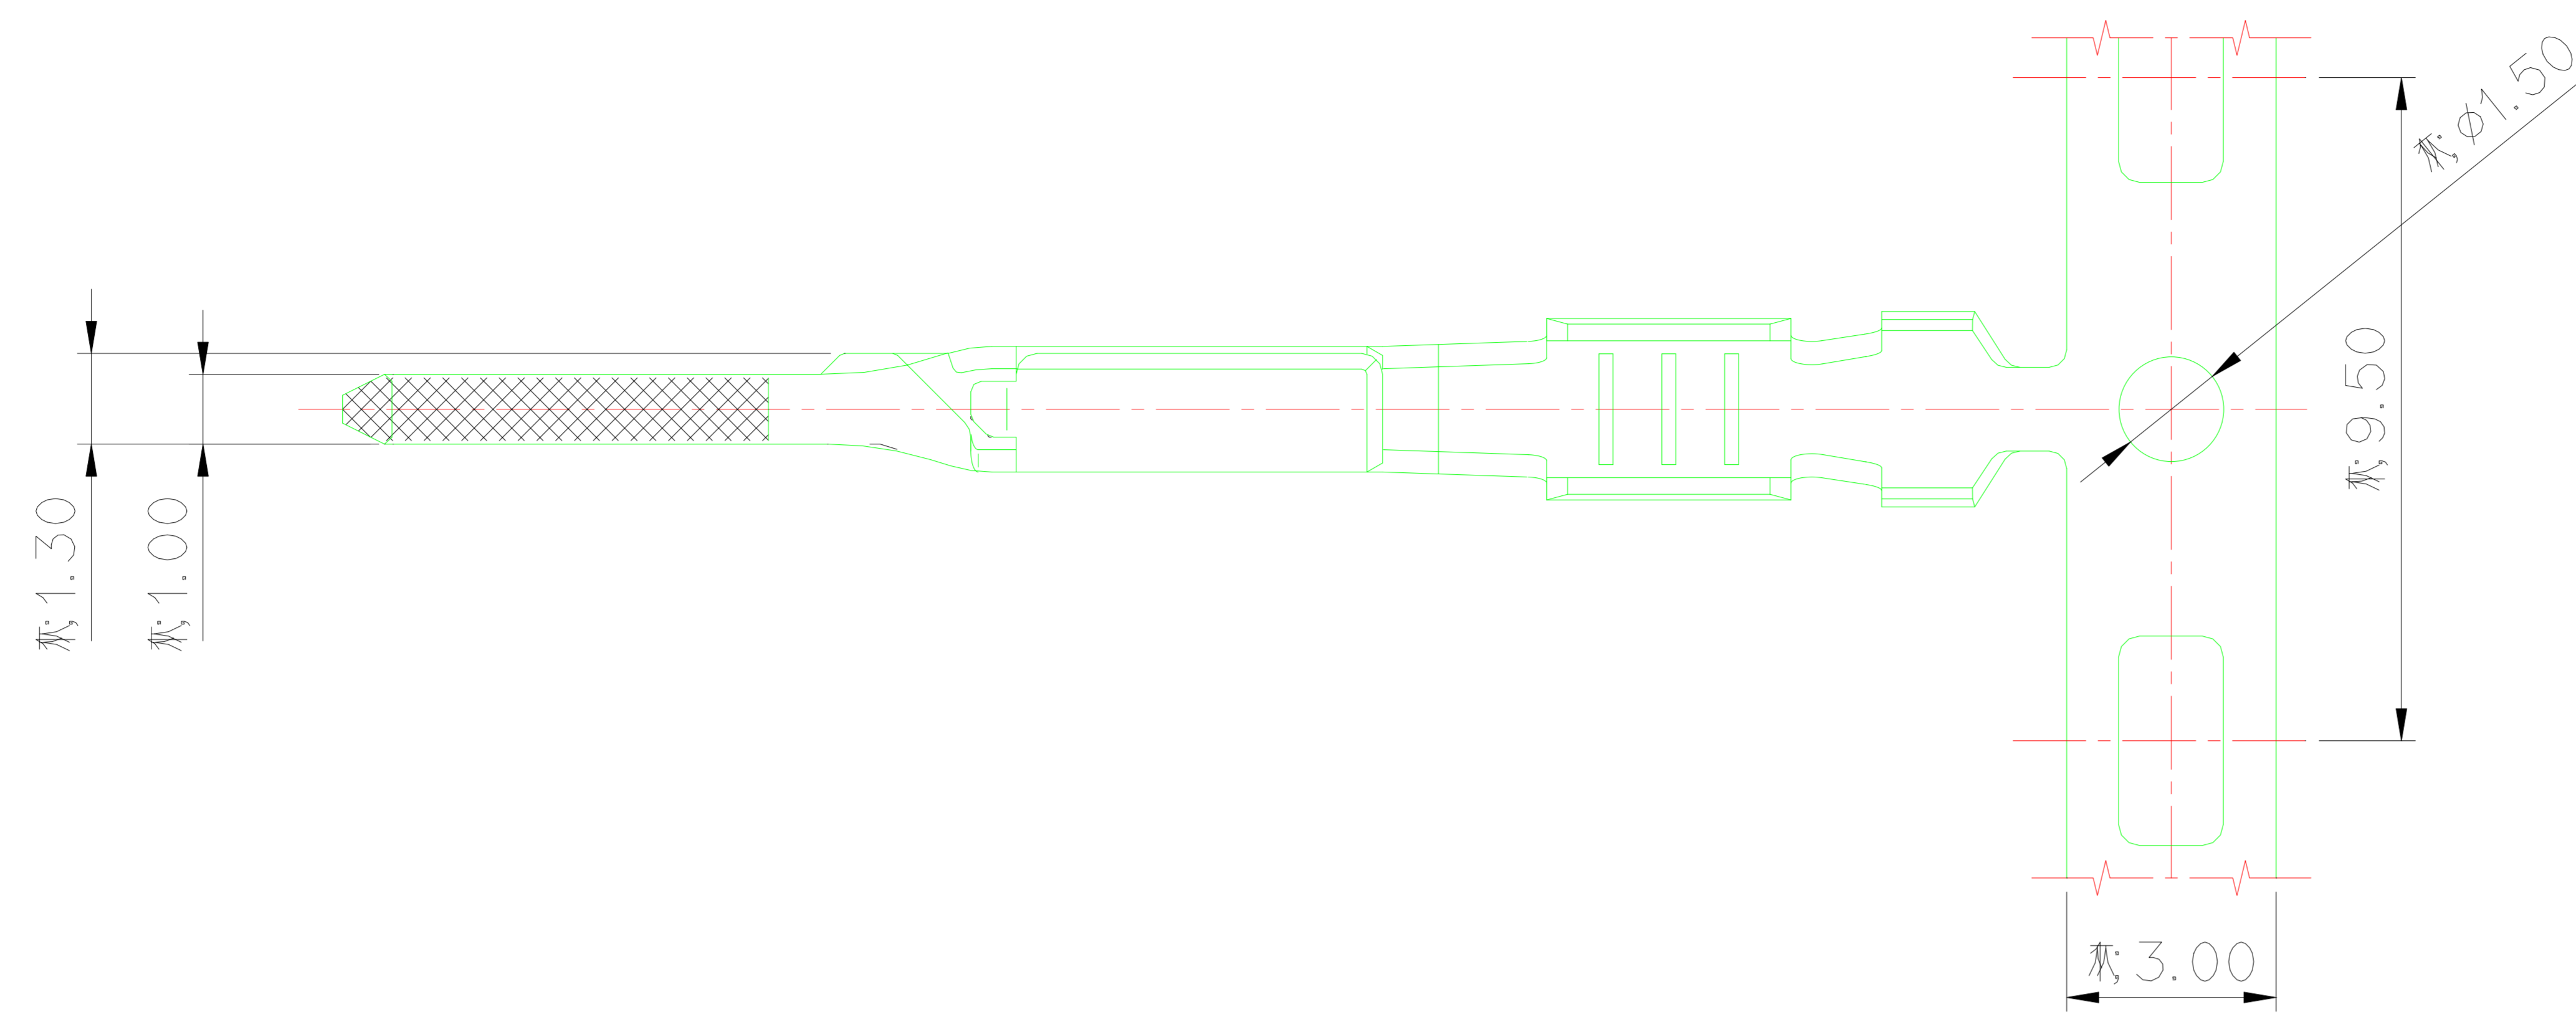

SECTION B-B

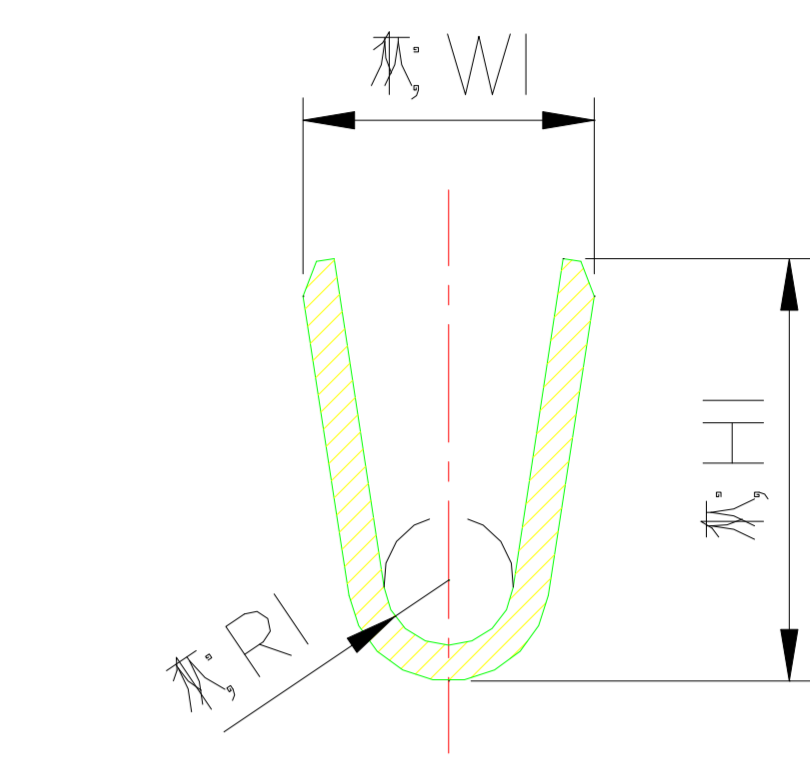

SECTION C-C

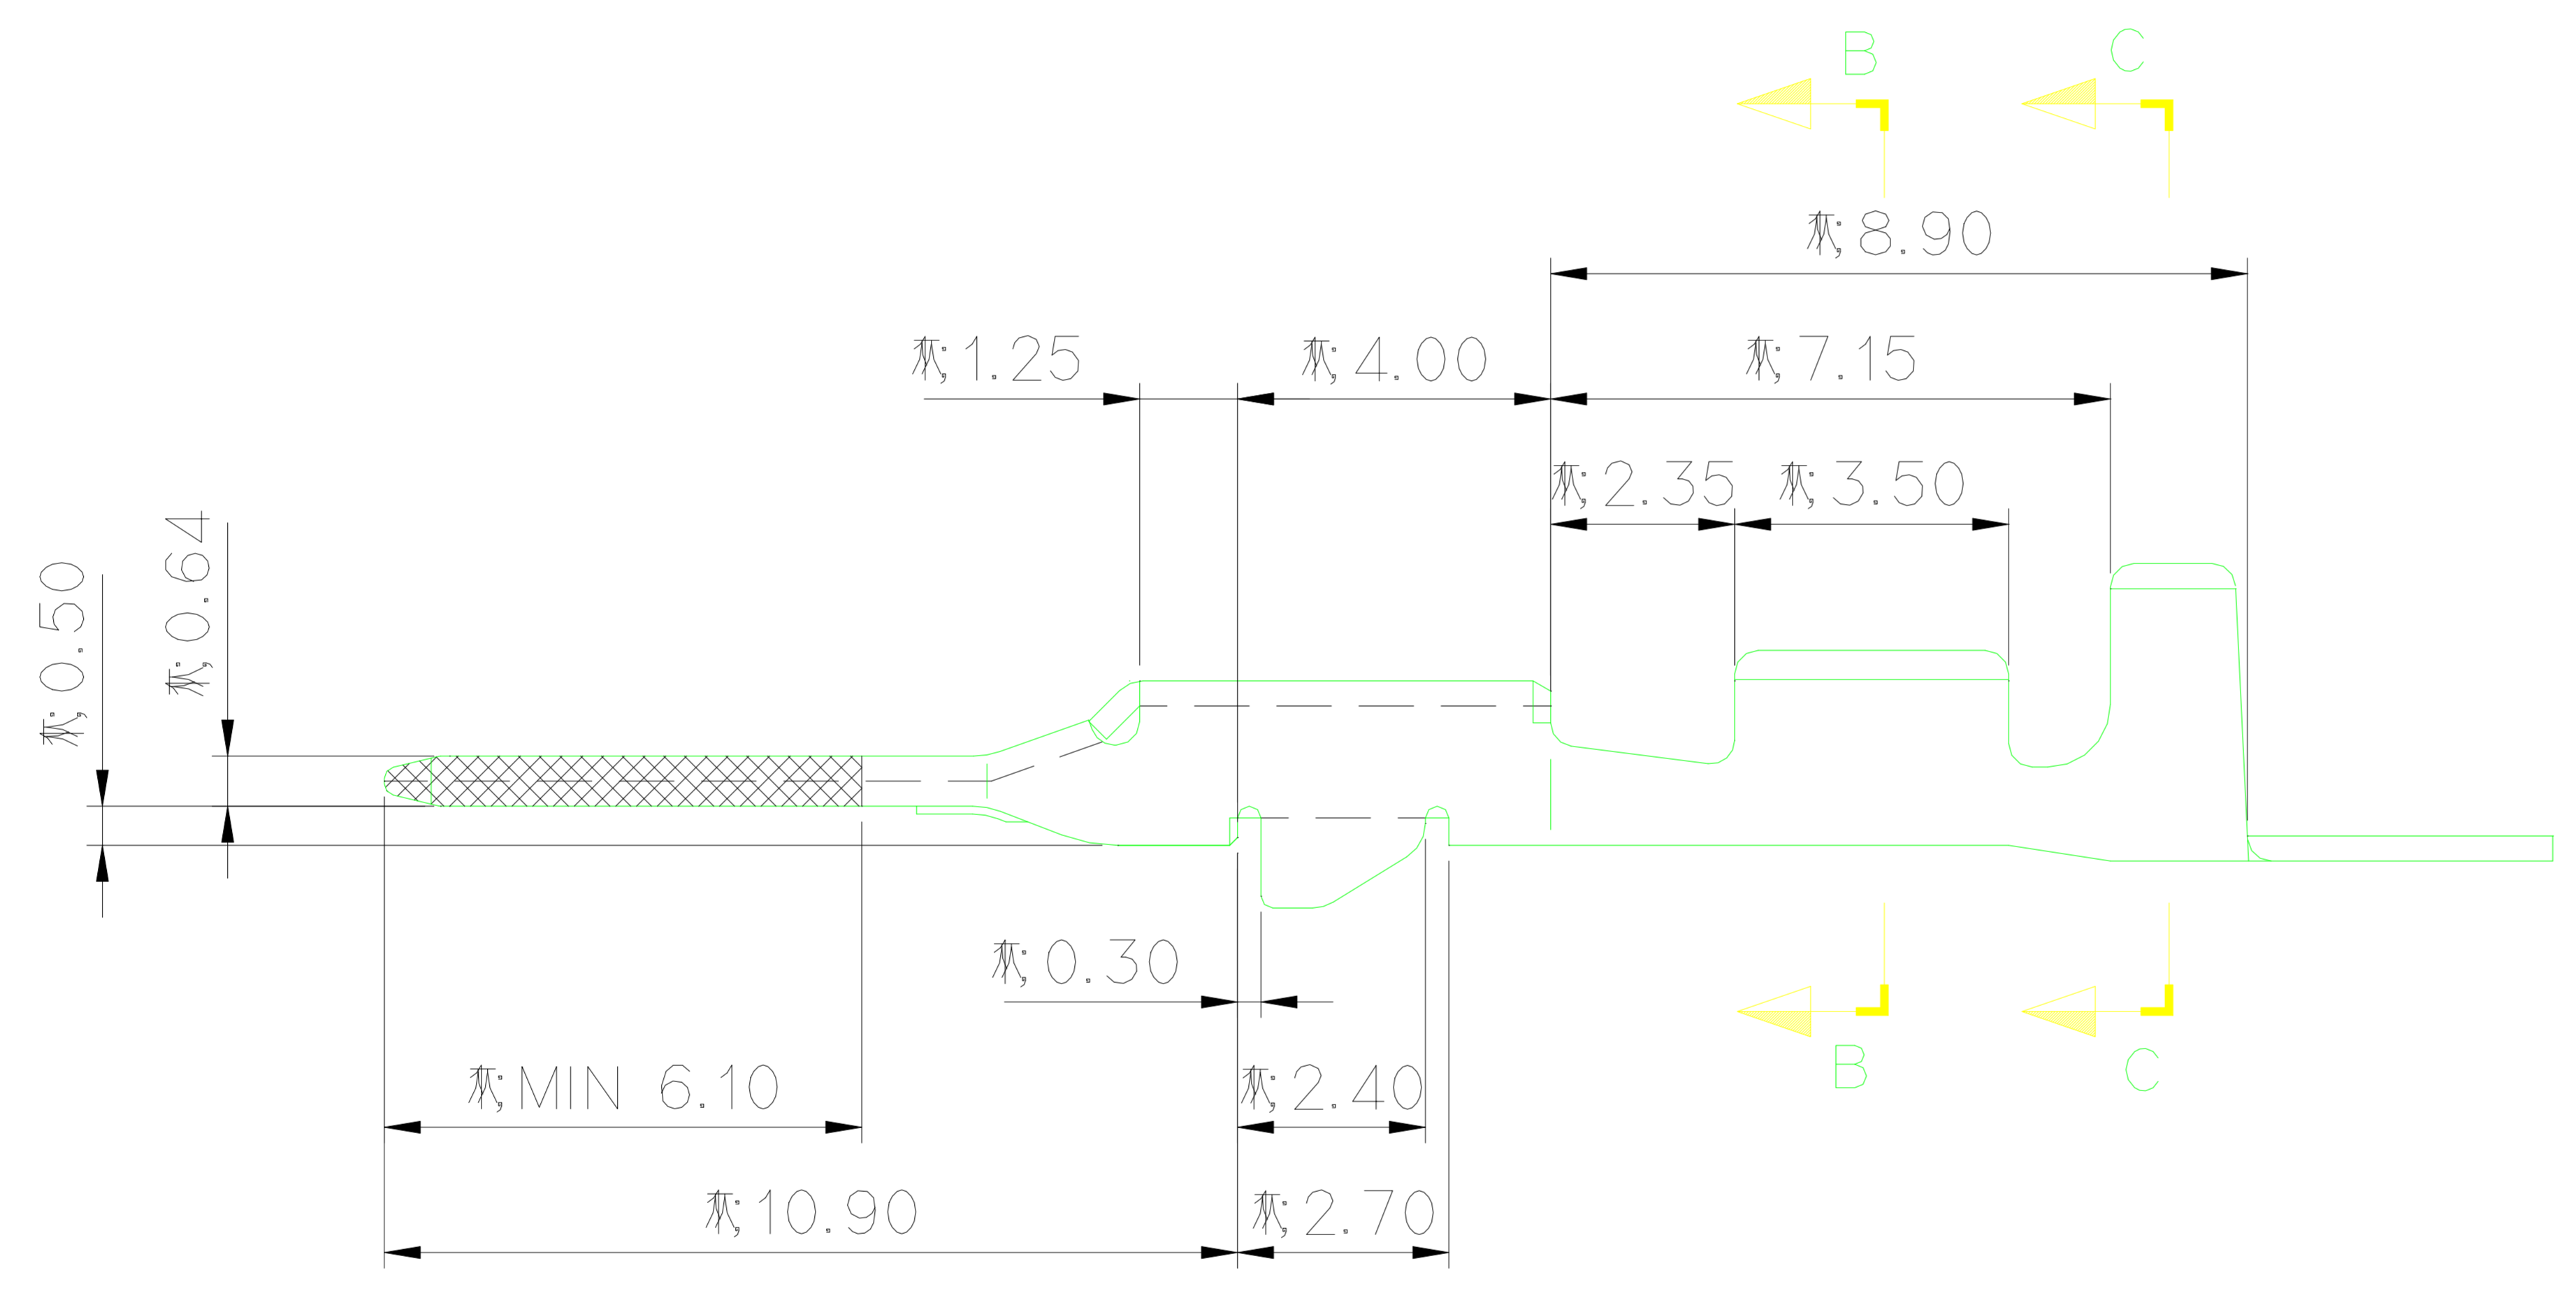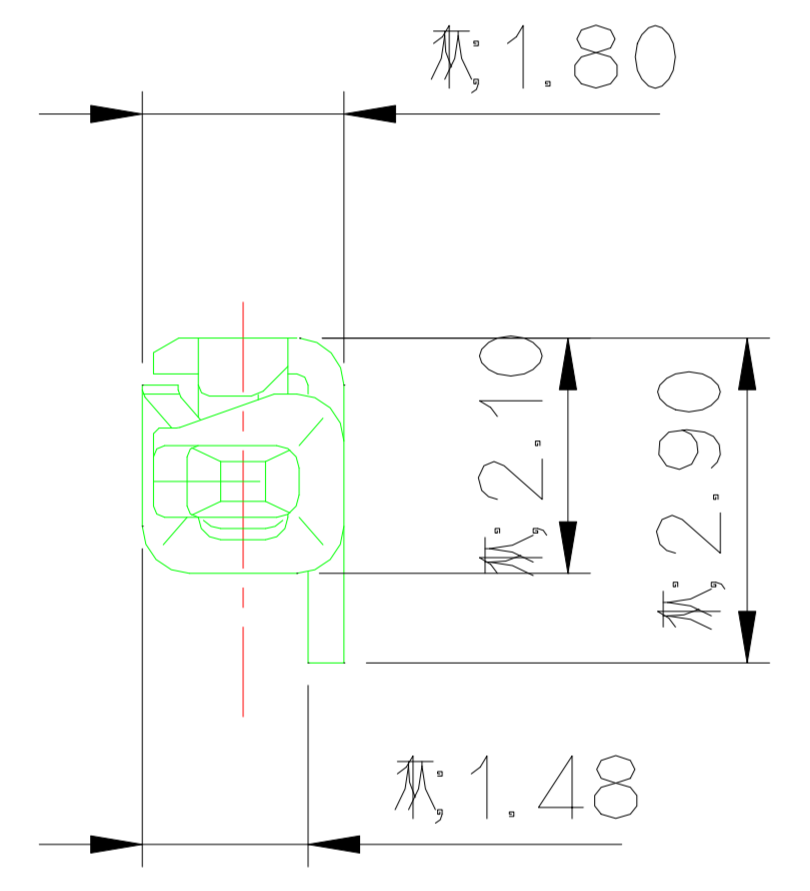


주 기

1. 지시없는 C,R=0.30으로 한다.
2. 기능상 유해한 흠,변형 및 BURR가 없을것.
3. 적용 상대 FEMALE TERMINAL : ST730770/ST730960/ST731007

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE FEMALE TERMINAL : ST730770/ST730960/ST731007

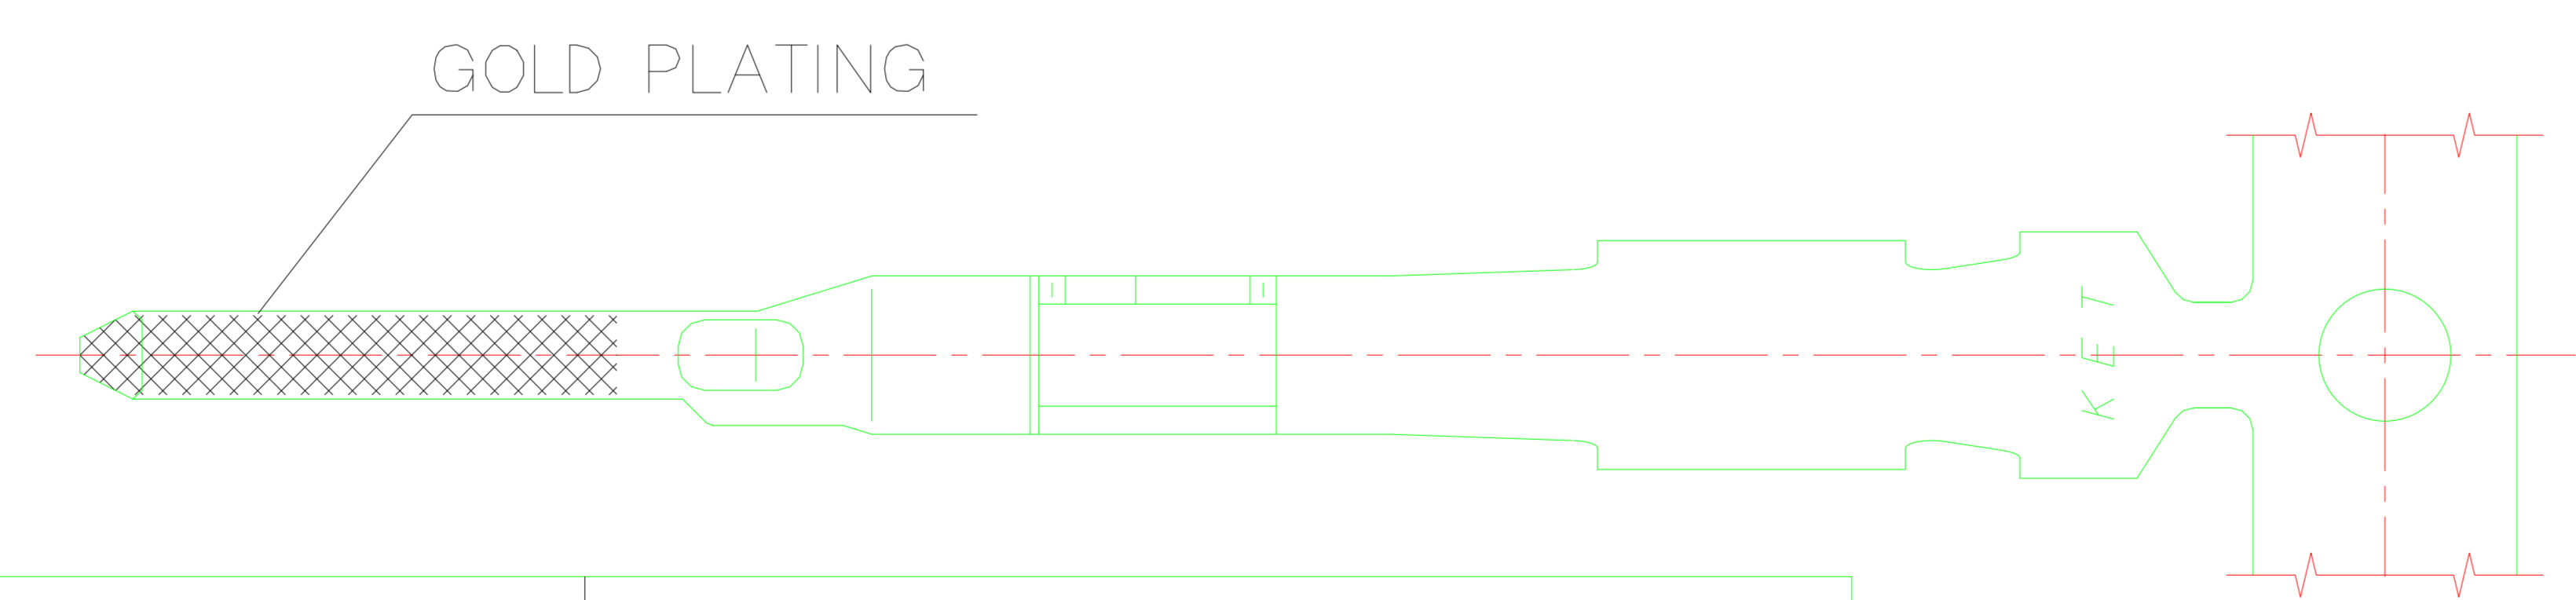

NO.	TIN PLATING	GOLD PLATING	WIRE SIZE	DIMENSION					
				WW	HW	RW	WI	HI	RI
1	ST740771-3	ST740771-G	AVSS(CAVS) 0.3-0.5	2.3	(2.49)	0.4	2.6	(3.77)	0.58
2	ST740959-3	ST740959-G	AVSS(CAVS) 0.85	2.6	(2.60)	0.53	2.6	(3.77)	0.58
3	ST741015-3	-	AVSS 0.22	2.2	(2.35)	0.33	2.6	(3.77)	0.58

				MATERIAL	BRASS 0.32t		K E T KOREA ELECTRIC TERMINAL CO., LTD.		
				FINISH	SEE TABLE		ENGINEERED		
				WIRE RANGE			CLASS	040III	
				INSULATION			TYPE	7114-4231	
LTR REVISION RECORD				DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
				DR. KYM '04.06.05	CHK.		DATE	SCALE 5/1	
				CHK.	APP.		DATE	PART NO. SEE TABLE	
				PART NAME					040III MALE TERMINAL (YZK)