
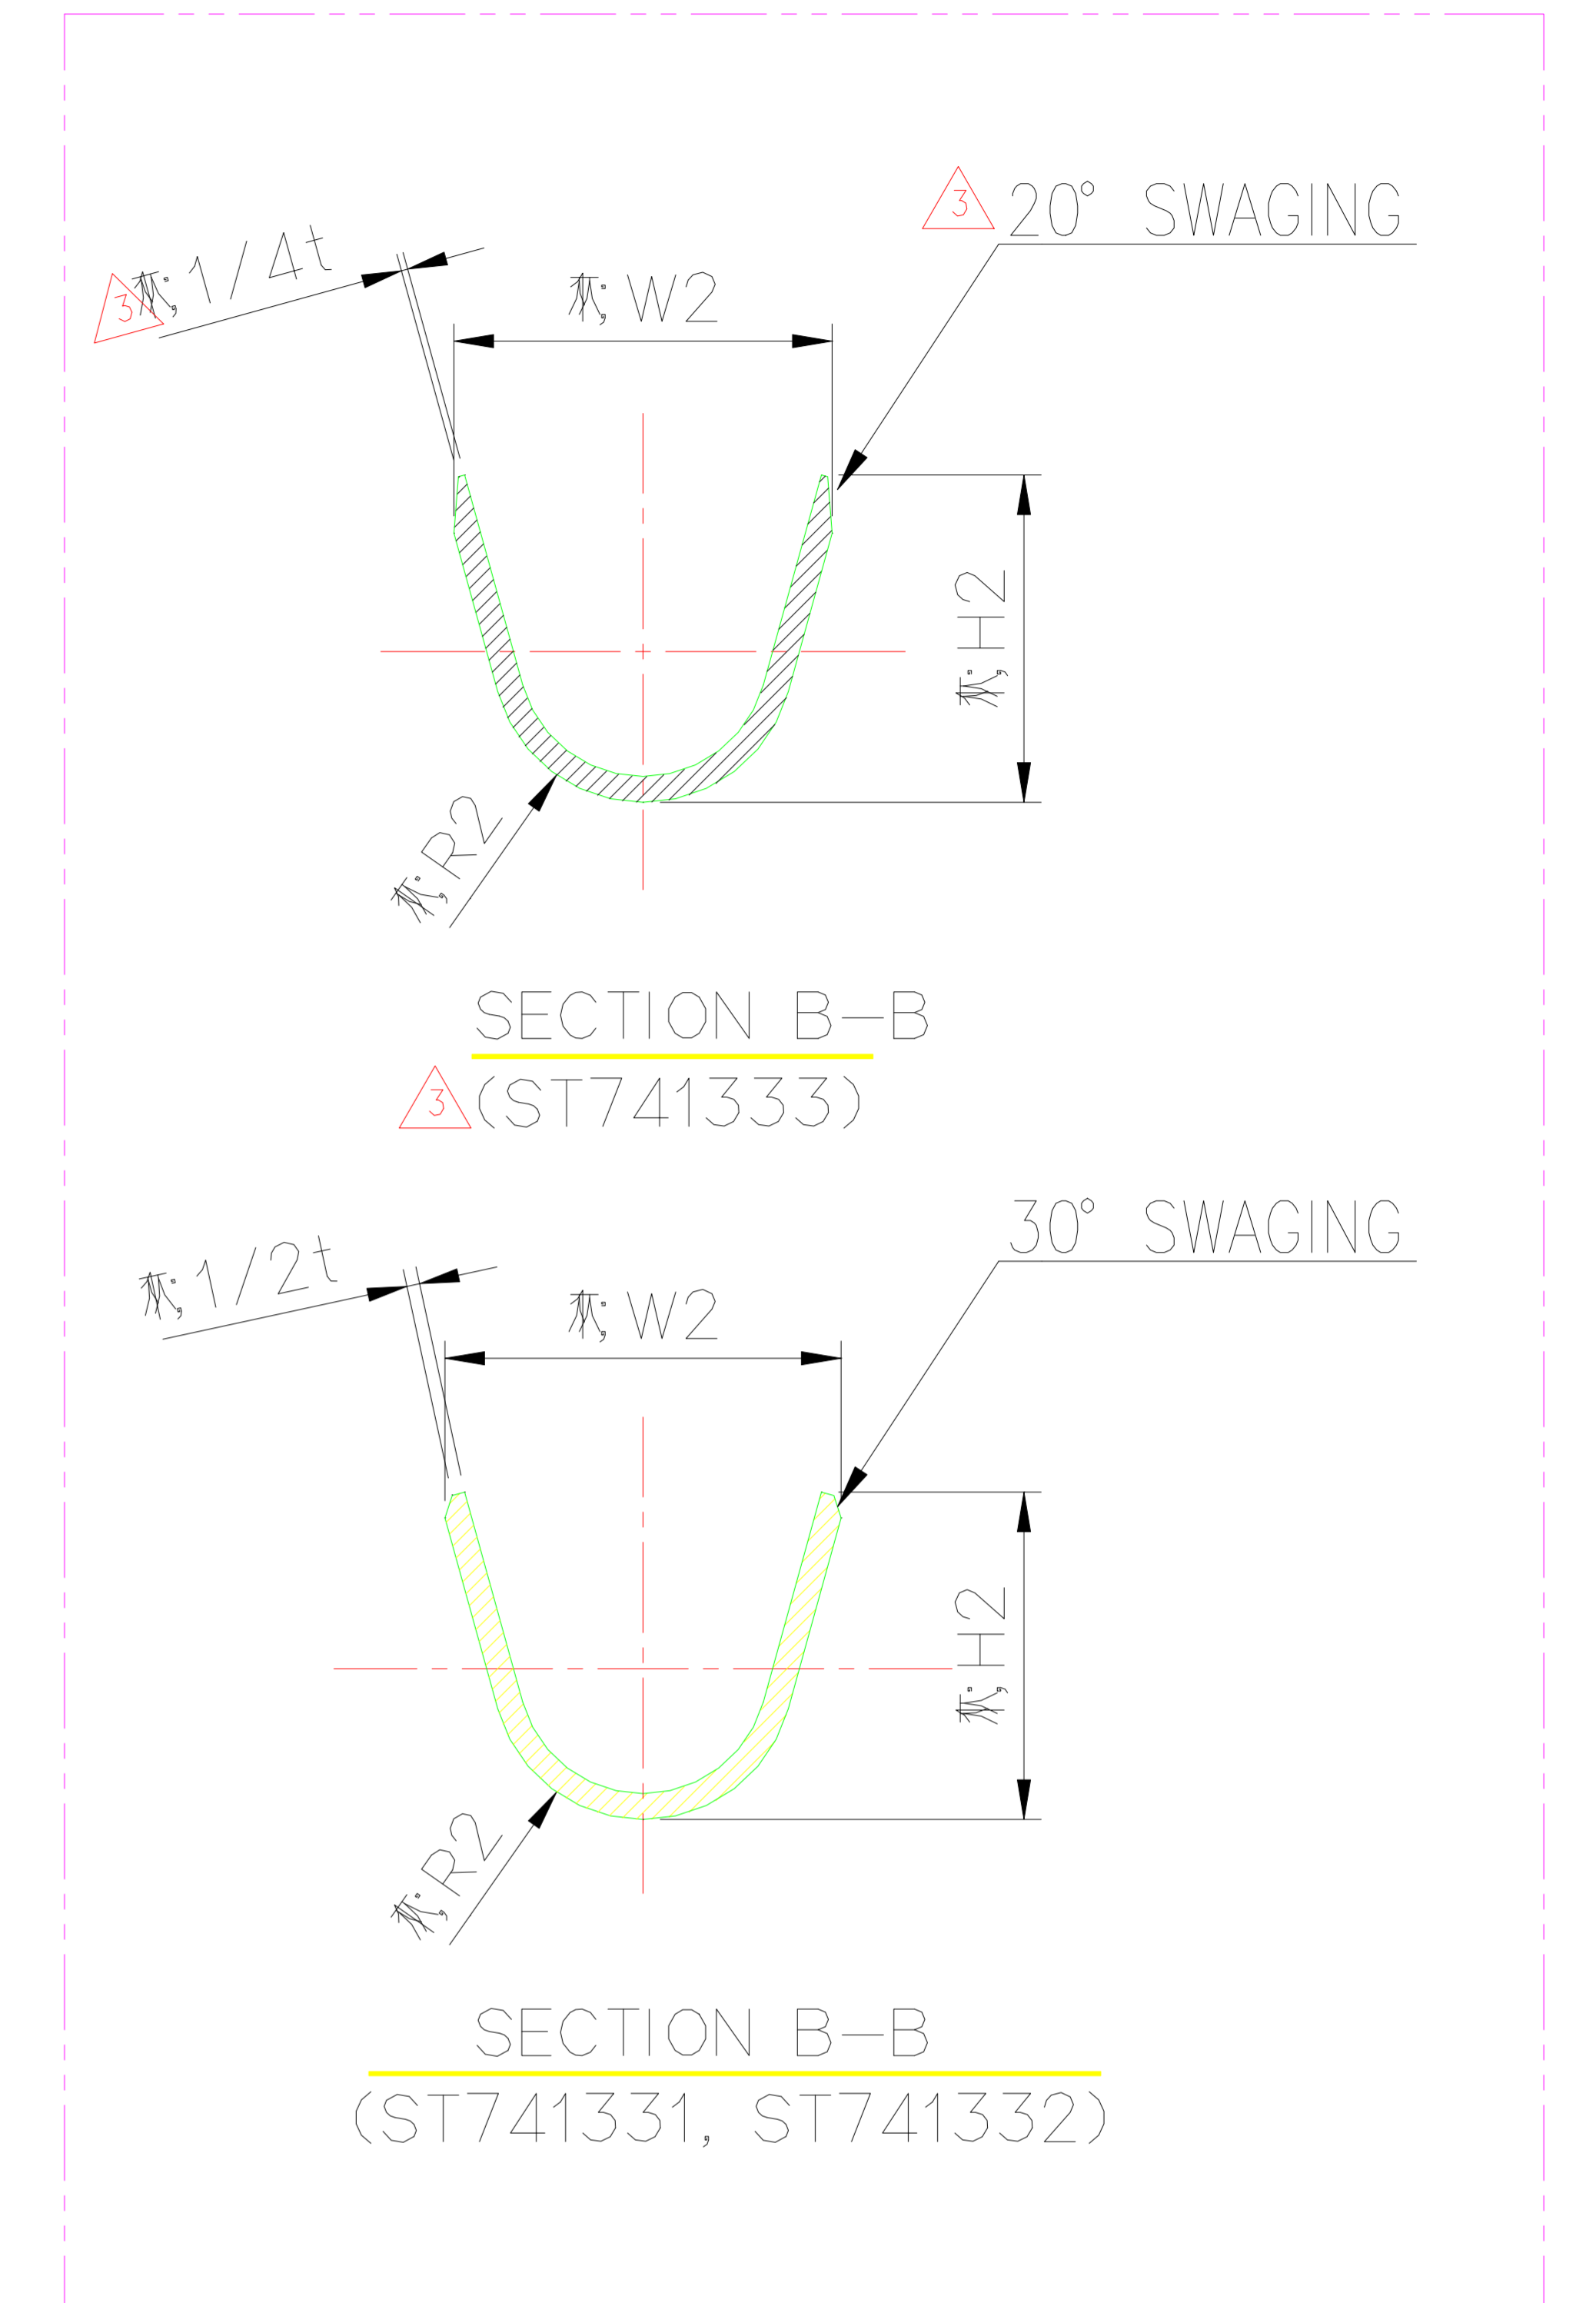


BARREL PART NO.	WIRE RANGE (mm <sup>2</sup> )	WIRE BARREL			INSULATION BARREL				
		C	D	W1	H1	R1	W2	H2	R2
ST741331 (S)	CHFUS 0.22 AVSS 0.22	22.7	2.5	1.9	(2.05)	0.6	2.1	(2.3)	1.0
ST741332 (M)	AVSS 0.3 - 0.5	22.7	2.5	2.3	(2.4)	0.7	2.6	(3.3)	1.2
ST741333 (L)	AVSS 0.85 - 1.25 △0.3+0.3 △0.3+0.5 △0.5+0.5	23.2	3.0	2.6	(3.2)	0.9	△3.65 △2	△(4.1) △2	△1.3 △2

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

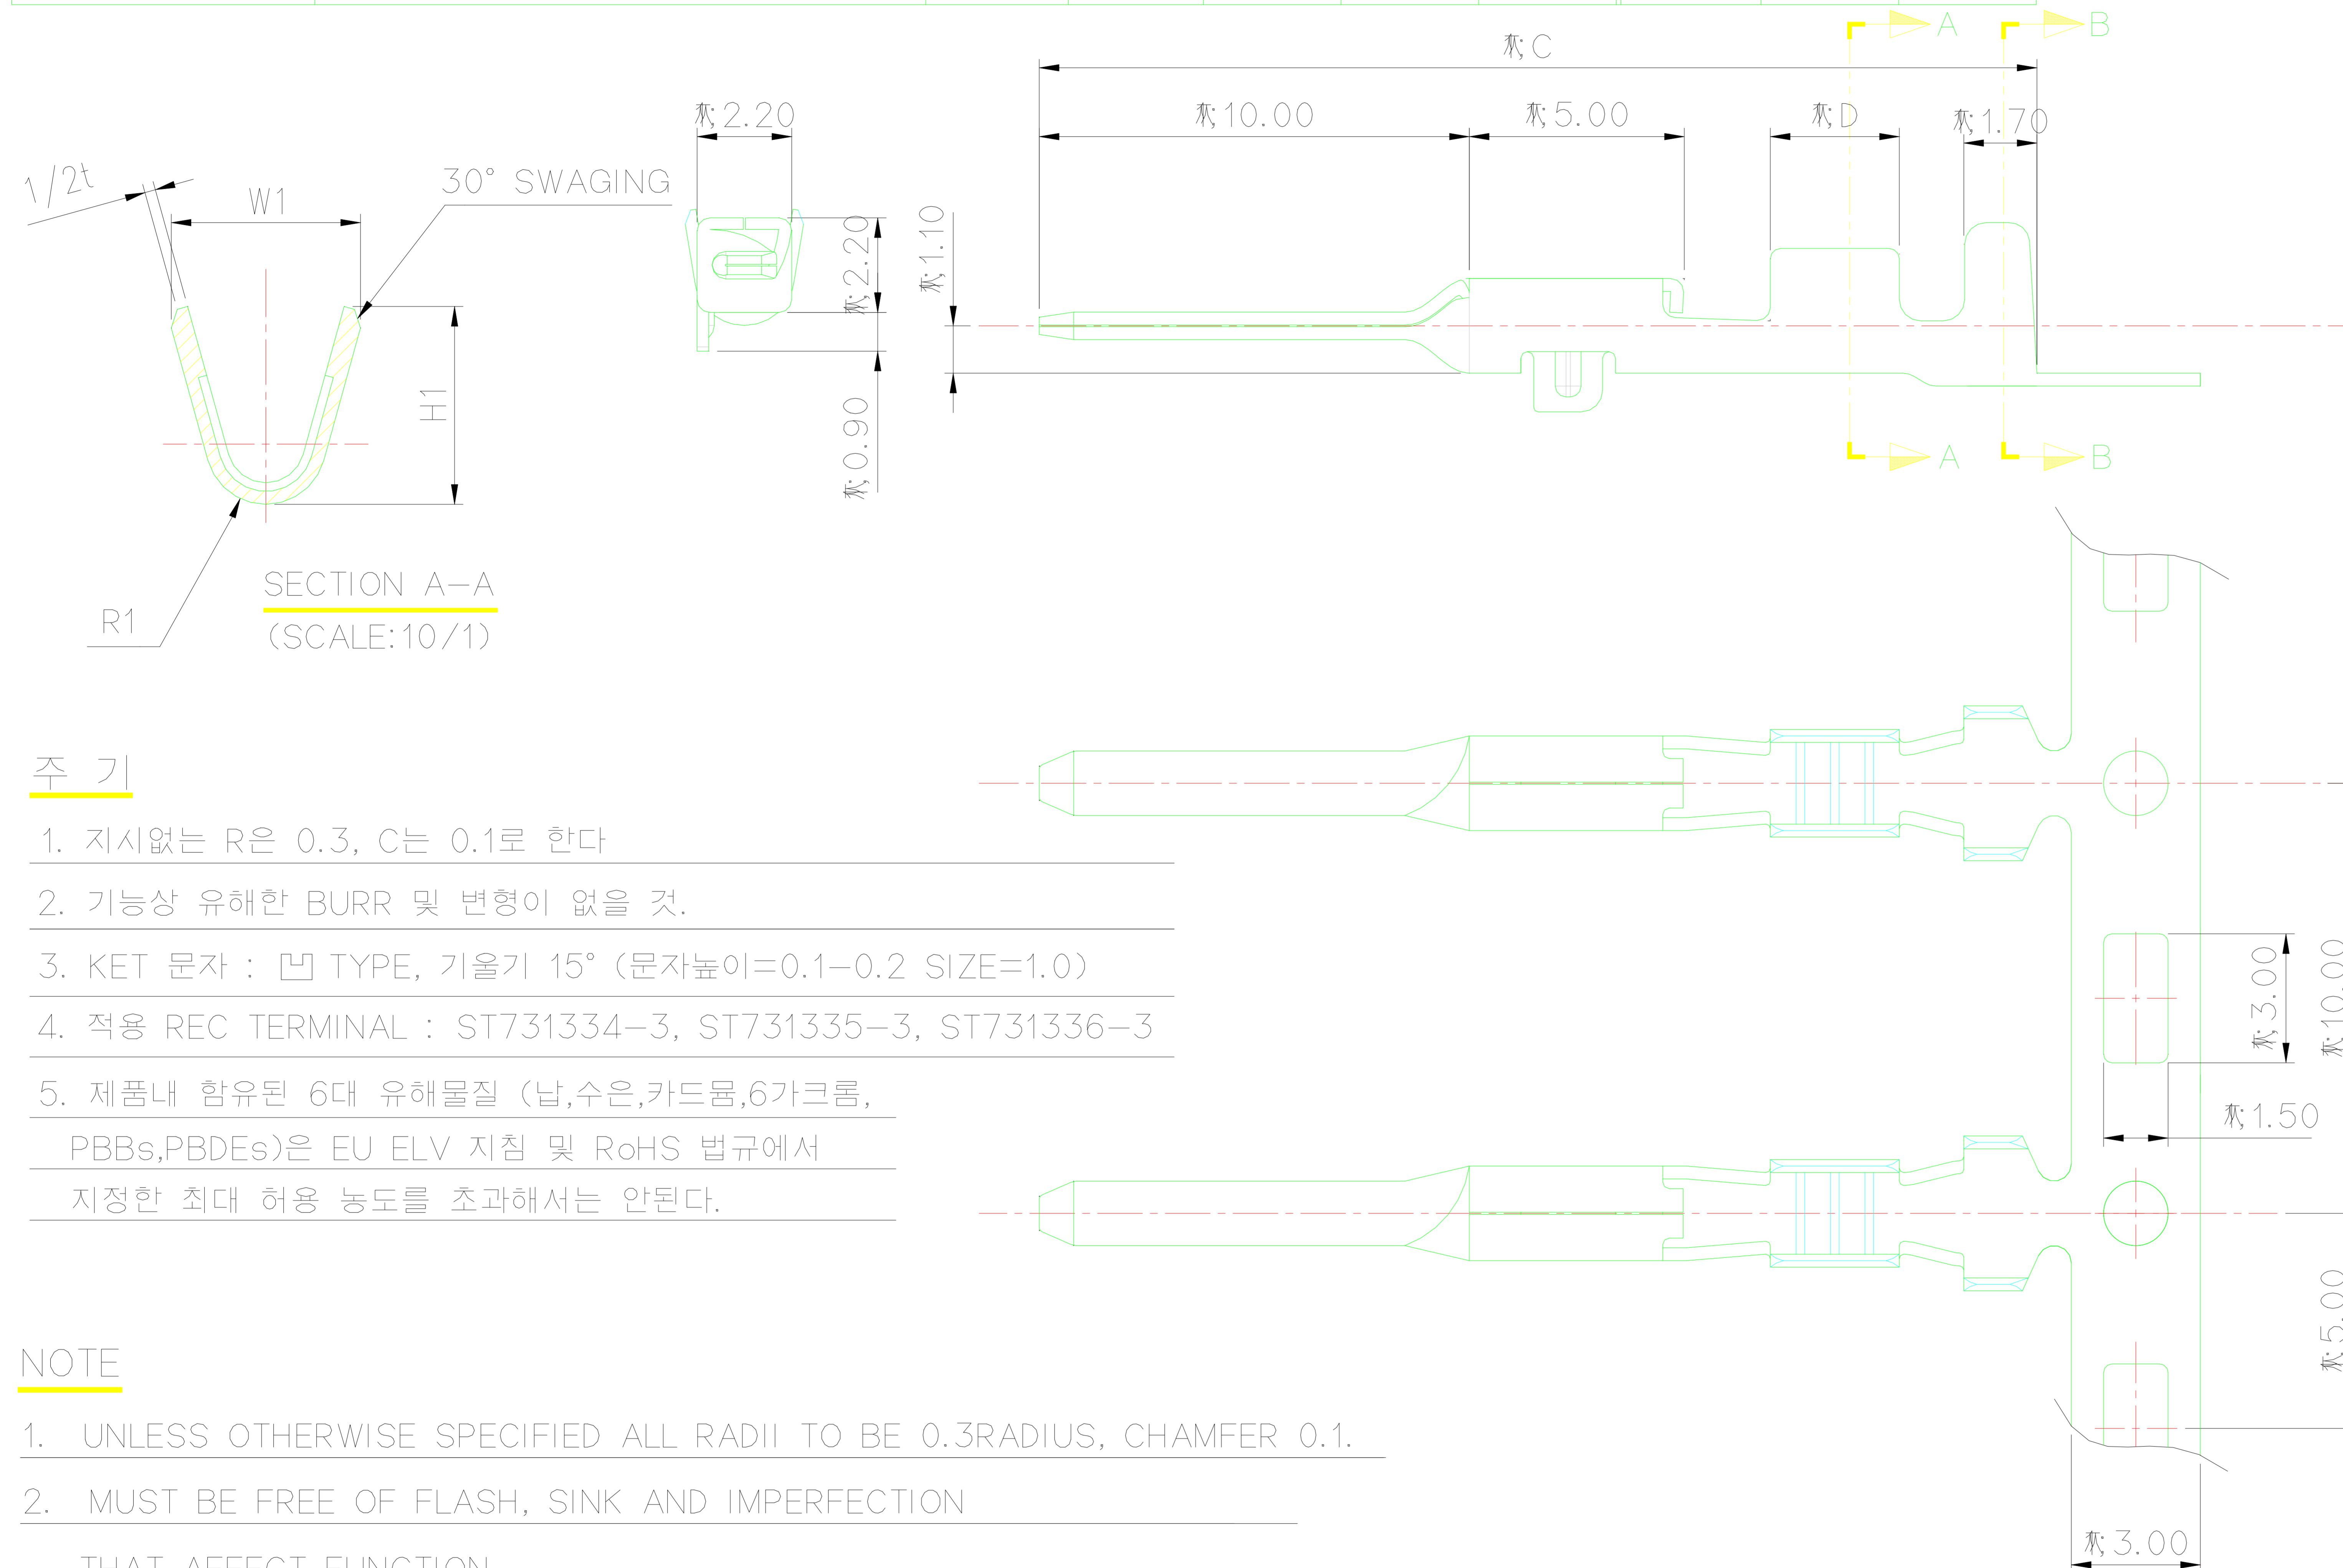


주 기

- 지시없는 R은 0.3, C는 0.1로 한다
- 기능상 유해한 BURR 및 변형이 없을 것.
- KET 문자 : □ TYPE, 기울기 15° (문자높이=0.1~0.2 SIZE=1.0)
- 적용 REC TERMINAL : ST731334-3, ST731335-3, ST731336-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3RADIUS, CHAMFER 0.1.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- KET CAVITY NO : □ TYPE, TAPER 15° (H; 0.1~0.2, SIZE; 1.0)
- APPLICABLE REC TERMINAL : ST731334-3, ST731335-3, ST731336-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



		MATERIAL		Brass		KOREA ELECTRIC TERMINAL CO., LTD.							
		FINISH		Pre-Tin									
		WIRE RANGE				CLASS		060					
		INSULATION				TYPE							
LTR		REVISION RECORD		DR.		APP.		DATE					
DR.		KM.H. '12.02.23		CHK.				SCALE		5/1			
CHK.		CSH		APP.		HSH		PART NO.		SEE TABLE			
						TOLERANCE EXCEPT AS NOTED		SEE TABLE		PART NAME		△ N060 MALE TERMINAL (S, M, L)	