


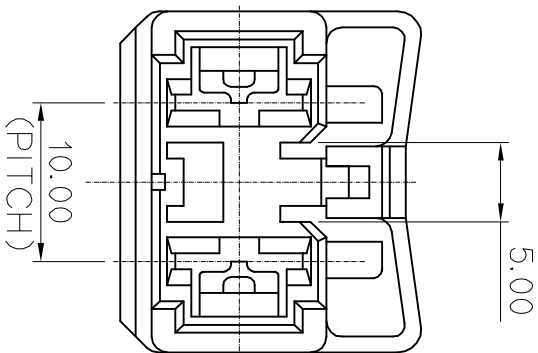


ISOMETRIC VIEW

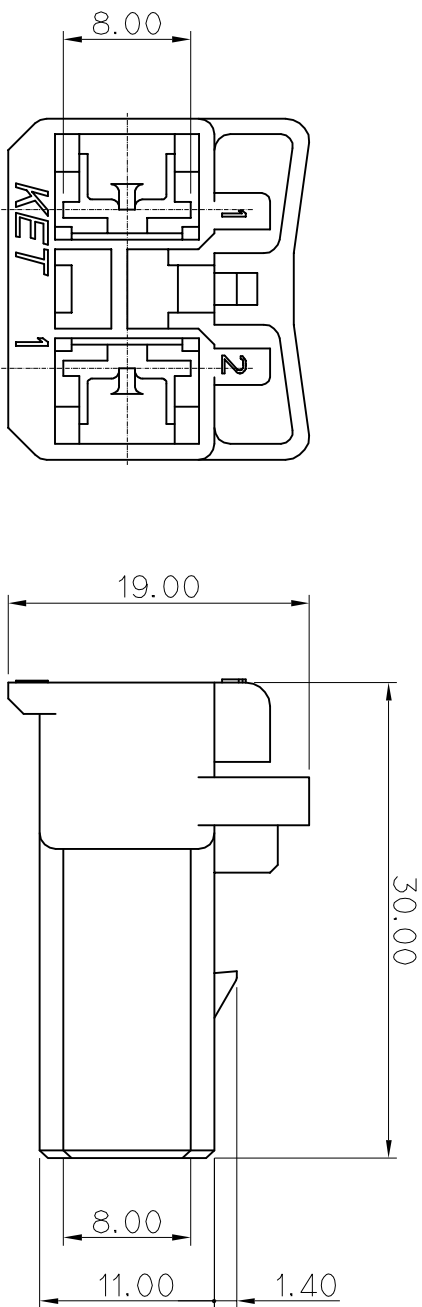

An isometric drawing of a mechanical component, showing its three-dimensional form. The part has a complex, symmetrical shape with multiple vertical and horizontal features, including a central rectangular block and several smaller protrusions and recesses. The drawing is oriented such that the top and front faces are visible, with the depth axis extending towards the viewer.

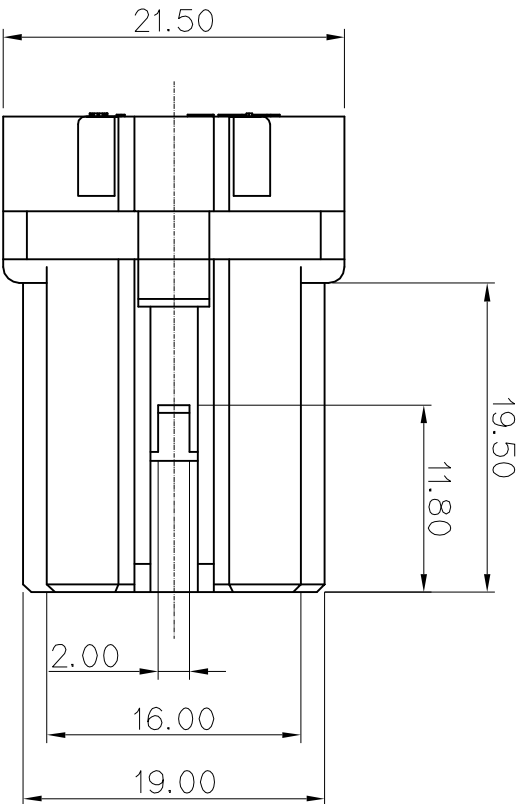

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
3. APPLICABLE R/HOLDER : MG622007T
4. APPLICABLE TERMINAL : ST730371, ST730372

1. 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
2. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
3. 적용 HS'G : MG622007T
4. 적용 TERMINAL: ST730371, ST730372

					MATERIAL	PET+PC (GWIT)	KIEP KOREA ELECTRIC TERMINAL CO., LTD. [ENGINEERED]
					FINISH	NATURAL	
					WIRE RANGE	CLASS	
					INSULATION	TYPE	
△	ECO-1402-129외거 도면 제작임	SMG	KSH	14.02.14	TOLERANCE EXCEPT AS NOTED	SCALE	
L7R	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.	
DR.	SMG. 14.02.13				CHK. PSH. 14.02.13		
CHK.	KSH. 14.02.13				APP. BACK' 14.02.13		
PART NAME							
312 2F HS'G							