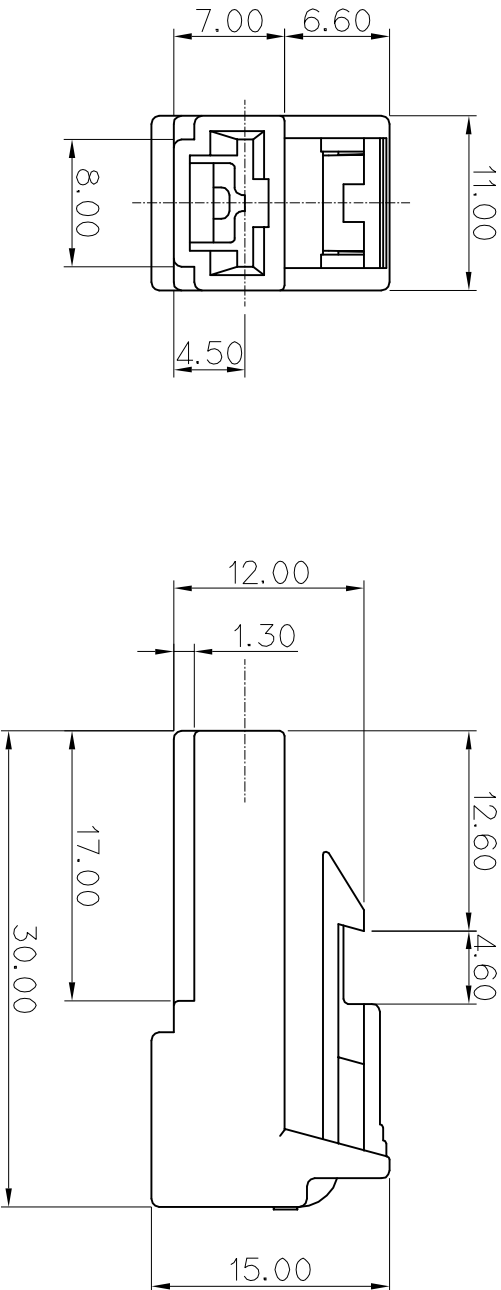
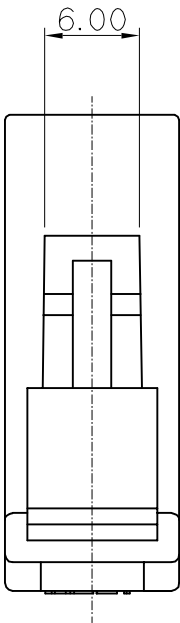
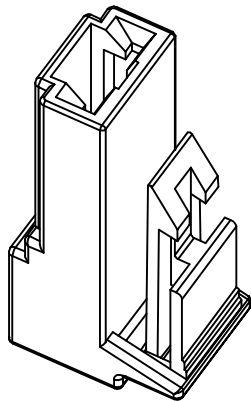


GENERAL TOLERANCE (TERMINAL)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.
3. APPLICABLE R/HOLDER : MG623085T
4. APPLICABLE TERMINAL : ST730371, ST730372

주 기

1. 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
2. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
3. 적용 HS'G : MG623085T
- 4.적용 TERMINAL: ST730371, ST730372

				MATERIAL	PET+PC (GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH	NATURAL		
				WIRE RANGE	CLASS		. 전자사업부 전용
				INSULATION	TYPE		. 312
				TOLERANCE EXCEPT AS NOTED	SCALE		2/1
				PART NAME	PART NO.		MG613084T
DR.	SMG. 14.02.13	CHK. PSH. 14.02.13					
CHK.	KSH. 14.02.13	APP. BACK' 14.02.13					
△	ECC-1402-129가 도면 제작임	SMG KSH 14.02.14					
LTR	REVISION RECORD	DR. CHK. APP. DATE					