

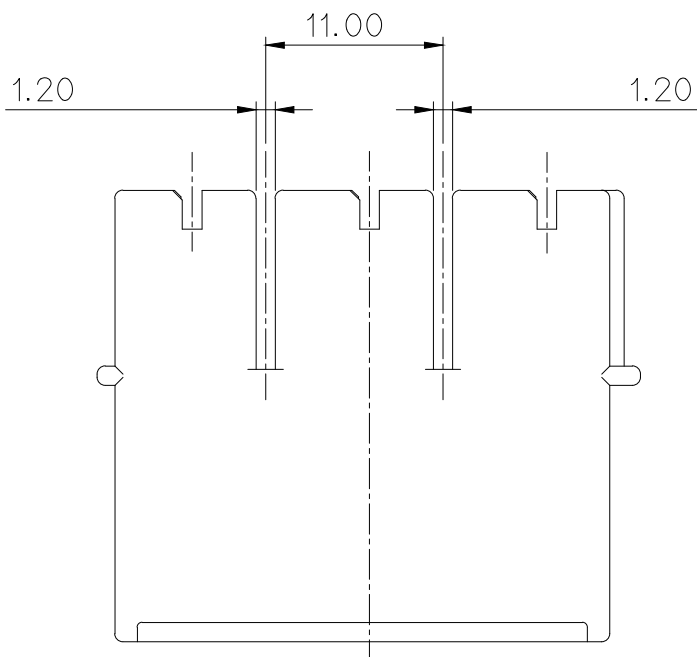
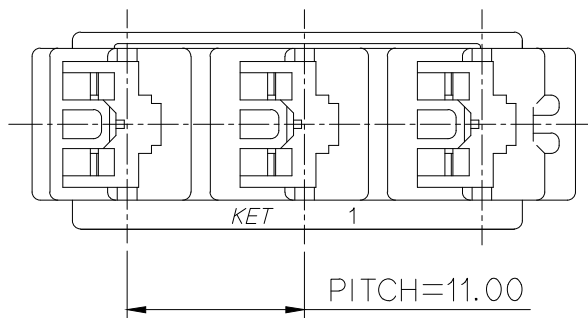
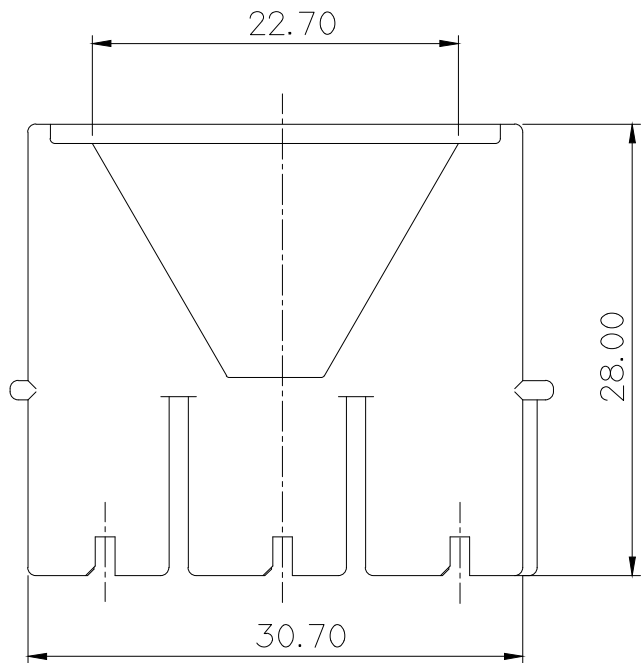


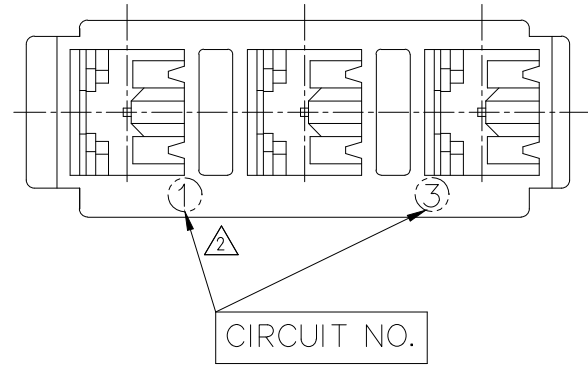


NOTE

- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST730570-3/571-3/572-3
APPLICABLE HOUSING : MG643366
- 3.10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

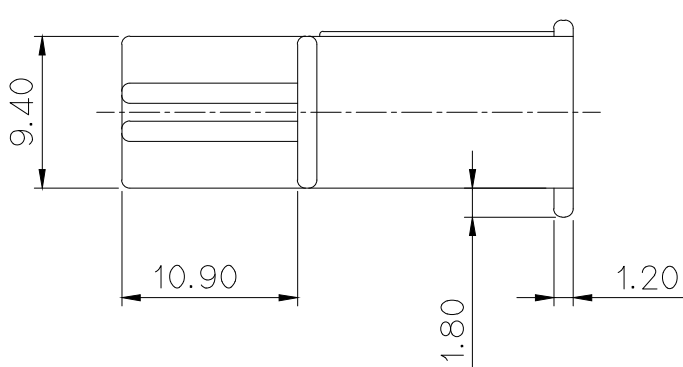

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±0.1	

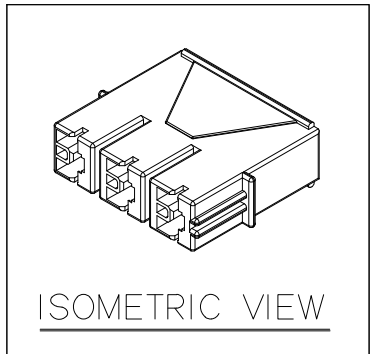

주 기

- 1.기능상 유해한 BURR, WELDLINE이 없을 것
- 2.적용 TERMINAL: ST730570-3/571-3/572-3
적용 HOUSING: MG643366
- 3.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

*

					MATERIAL PBT(VO)		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
③	ECO-2105-030	근거 도면 재작성	SCW	PSH	KSH	'21.05.06	WIRE RANGE		CLASS .250
②	ECO-1207-221	근거 도면 재작성	KSJ			'12.07.23	INSULATION		TYPE
①	설계시양변경(S110128)	근거 도면 재작성	KSJ		KSH	'11.04.27	TOLERANCE EXCEPT AS NOTED		SCALE 2/1
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	SEE TABLE		PART NO. MG 613365
DR. HAK. '2004.07.16			CHK.			PART NAME			
CHK. 8.16			APP. 8.16			250 P-LOCK 3P HOUSING			



ISSUE MARK