

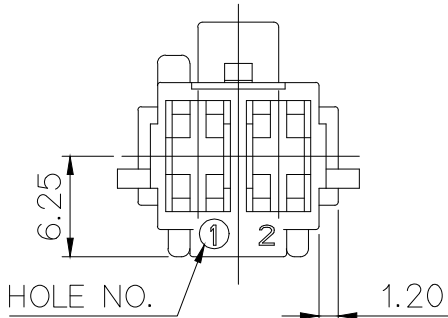
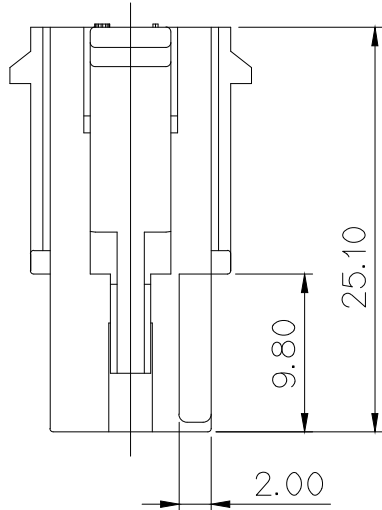
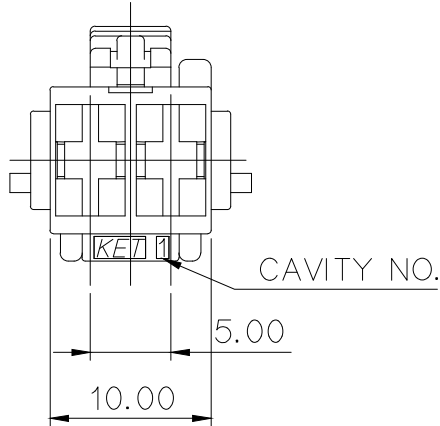
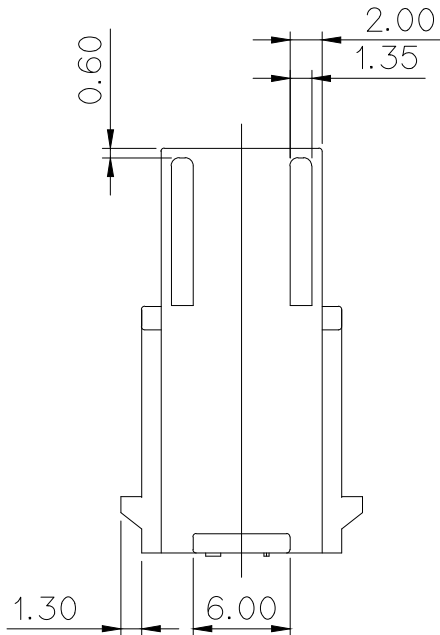


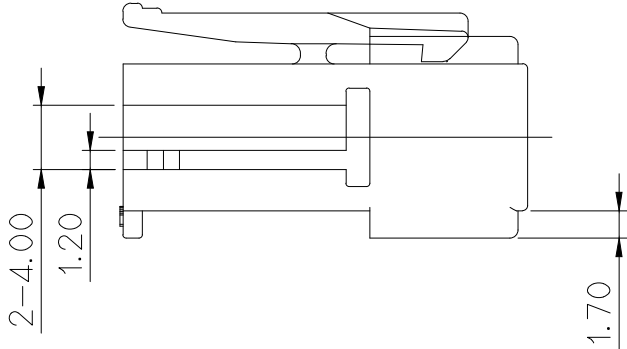

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

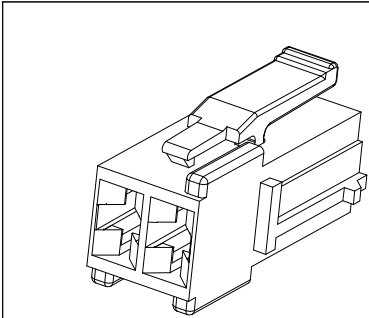

ISOMETRIC VIEW

주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없음.
- 3.적용 TERMINAL: ST730948-3/0993-3/1329-3/1339-3M
적용 R/HOLDER: MG633658-1
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2- 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELD LINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730948-3/0993-3/1329-3/1393-3M
APPLICABLE R/HOLDER: MG633658-1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. *표시는 색상 표기 임.

NO.	COLOR
* 0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL PET+PC(G.W.I.T)		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		
					INSULATION		
△	ECO-1711-145 근거 도면 재작성	LCM	KSH	BUC	17.11.13	CLASS .250	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1
DR. JJY.'2007.01.19		CHK.	HAK. 01/19			PART NO. MG613871T-※02	
CHK.		APP.	CBJ. 01/19			PART NAME 250 PUMP 2F HS'G	