

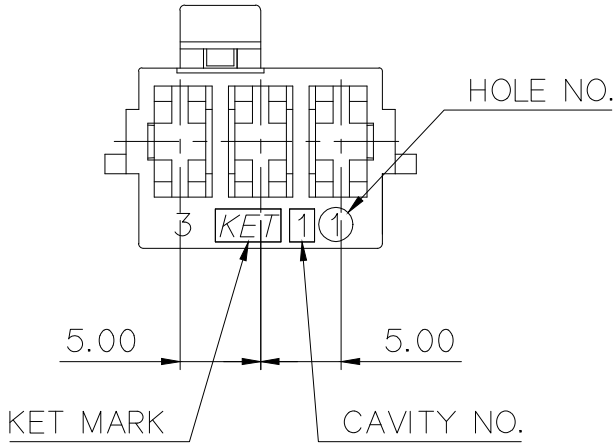
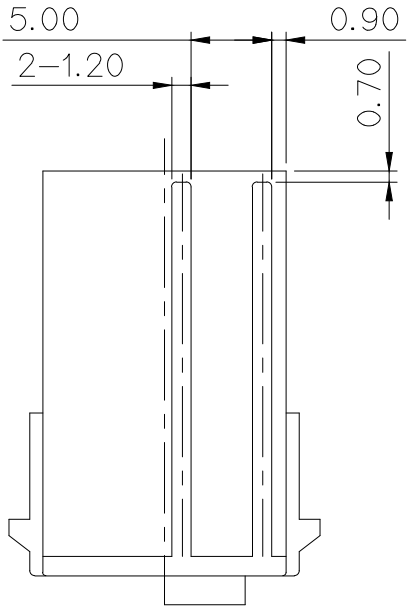
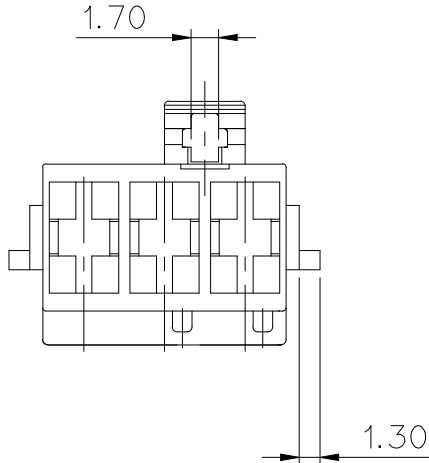
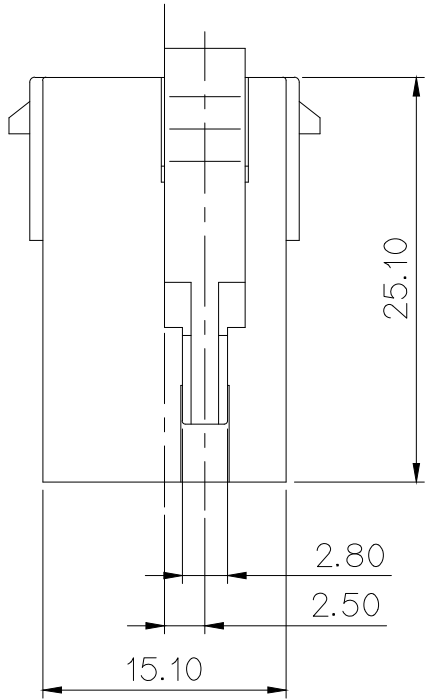


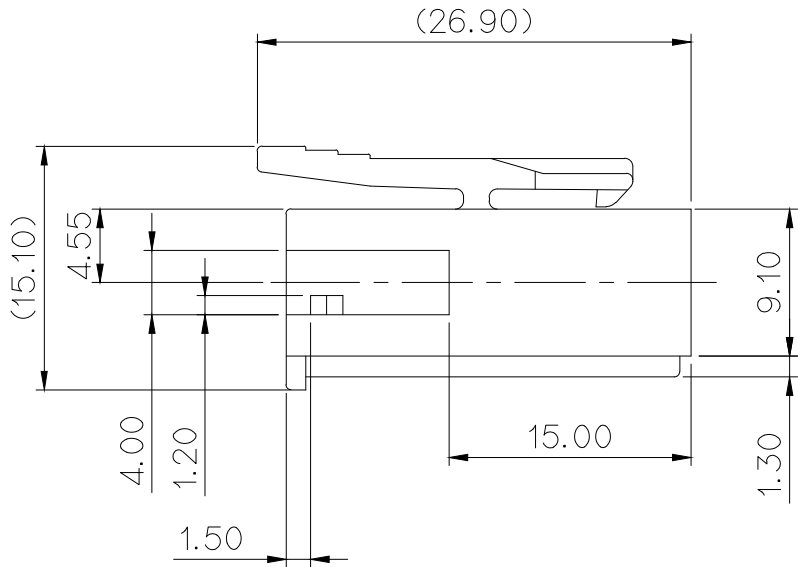

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

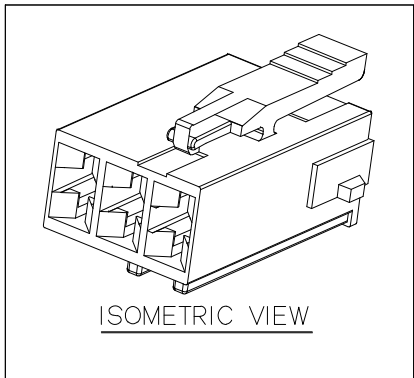

주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 TERMINAL: ST730948-3/0993-3/1329-3
ST731393-3M
적용 R/HOLDER: MG633659-1
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730948-3/0993-3
ST731329-3/1393-3M
APPLICABLE R/HOLDER: MG633659-1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. ∗표시는 색상 표기 임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

∗

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL		PET+PC(G.W.I.T)			KOREA ELECTRIC	
						FINISH		SEE TABLE			TERMINAL CO., LTD.	
						WIRE RANGE				CLASS	250	
						INSULATION				TYPE		
	ECO-1711-249 근거 도면 재작성		LCM	KSH	BUC	'17.11.20						
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE		TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. M614705T-∗03	
DR. PSH		'09.04.28	CHK. CJH		'09.04.29		PART NAME 250 3P HOUSING (R-B)					
CHK.			APP. CSH		'09.04.29							