

- | |
|--|
| 1.지시 하지 않은 변경 R은 0.2~0.3로 한다. |
| 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것. |
| 3.적용 TERMINAL: ST730948-3/0993-3/1329-3
ST731393-3M |
| 적용 R/HOLDER: MG633661-1 |
| 4.제품내 함유된 6대 유해물질 (납,스,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다. |

NOTE

- 1.UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.2 – 0.3 RADIUS.
- 2.MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
- 3.APPLICABLE TERMINAL: ST730948–3/0993–3
ST731329–3/1393–3M
APPLICABLE R/HOLDER: MG633661–1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED UNDER
EU ELV DIRECTIVE & RoHS REGULATION.


APPROVED

2019-11-05






**KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team**

ISSUE MARK

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	



ISOMETRIC VIEW

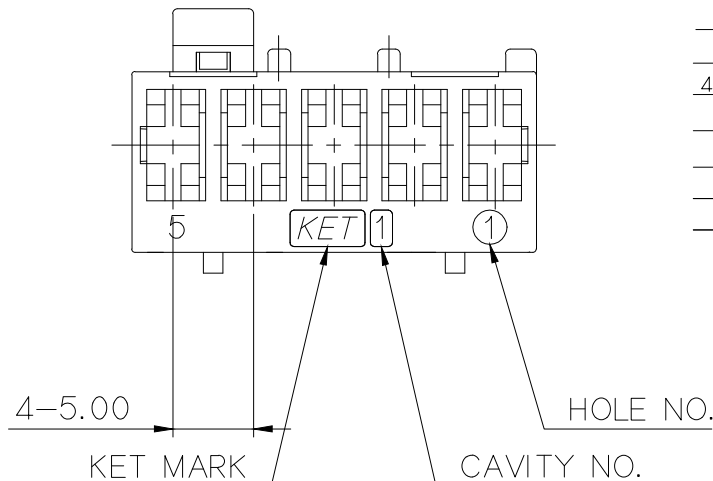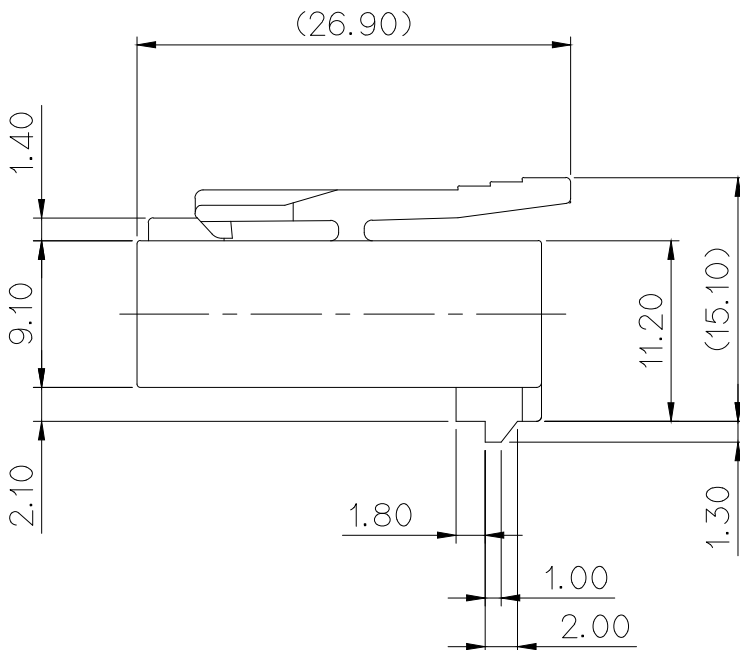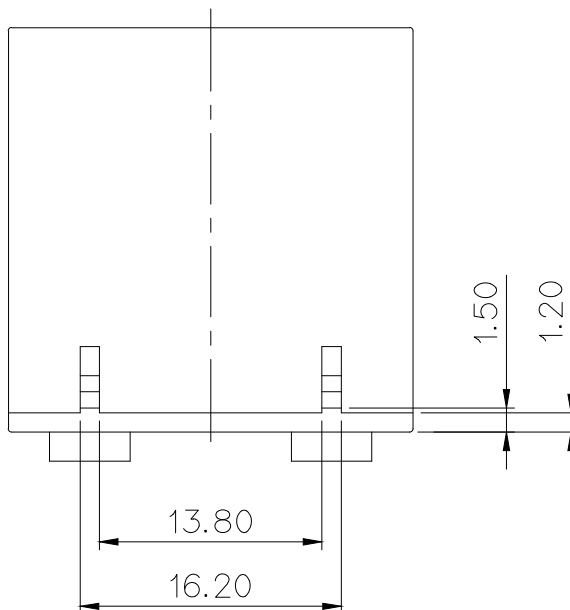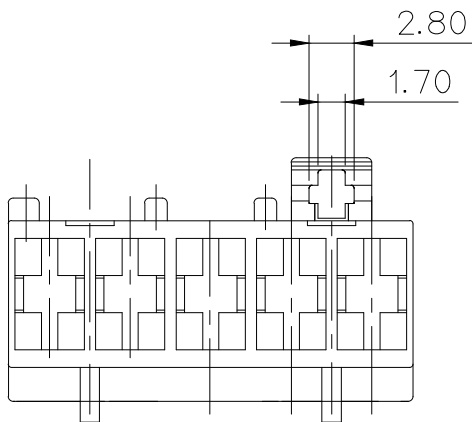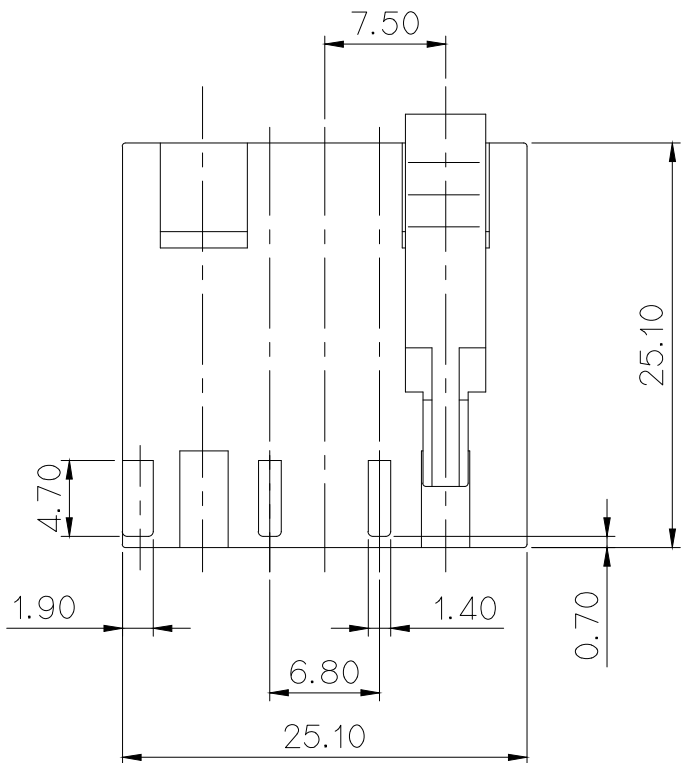

PART NO. *표시는 색상 표기 임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

						MATERIAL		PET+PC(G.W.I.T)	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH		SEE TABLE				
						WIRE RANGE		CLASS		250		
						INSULATION		TYPE				
	ECO-1711-145 근거 도면 재작성	LCM	KSH	BUC	'17.11.13	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	2/1	PART NO.	MG614706T-*05
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE							
DR.	PSH '09.04.28	CHK.	CJH		'09.04.29							
CHK.		APP.	CSH		'09.04.29	PART NAME						
						250 5P HOUSING (B)						