
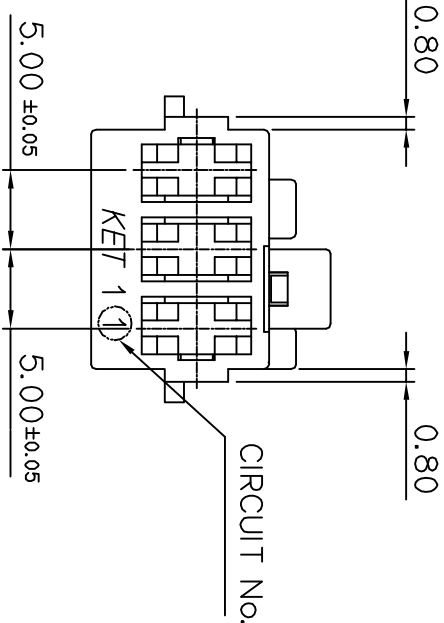
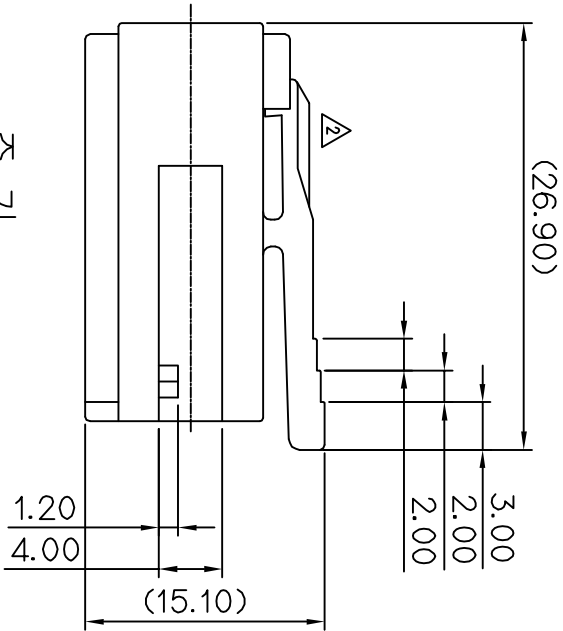
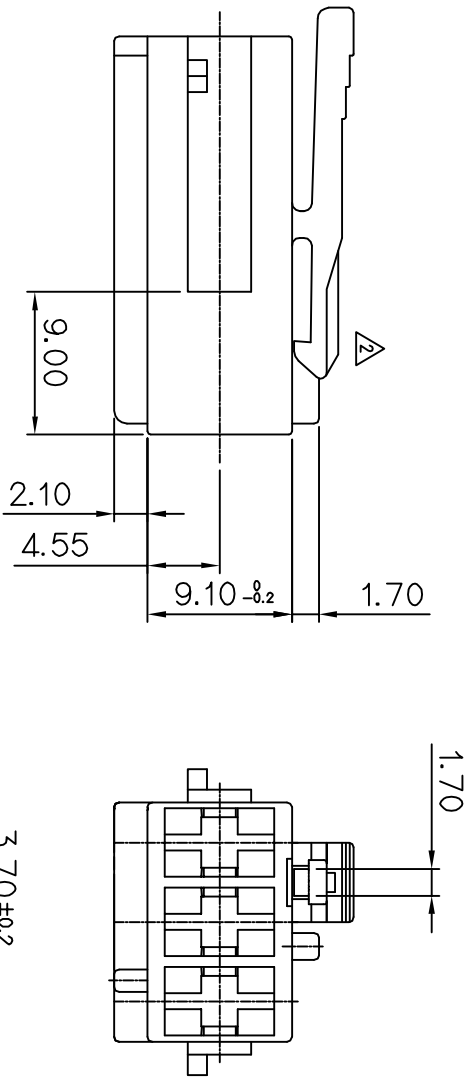
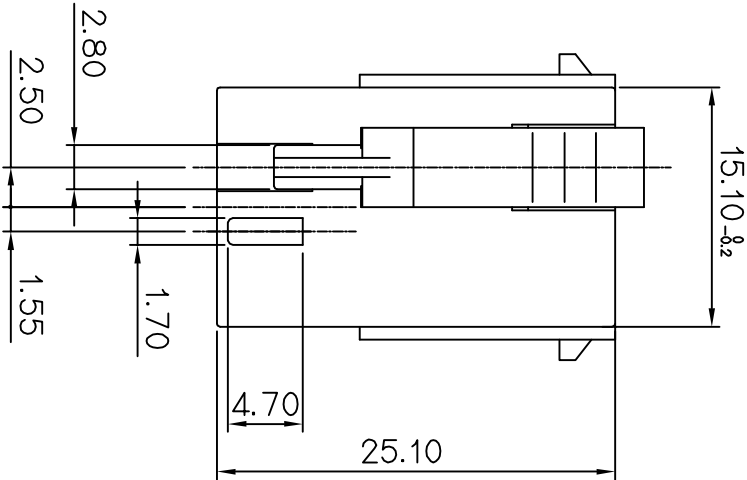


GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730948-3/993-3
APPLICABLE R/HOLDER : MG633659-1
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury,
Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT
EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION

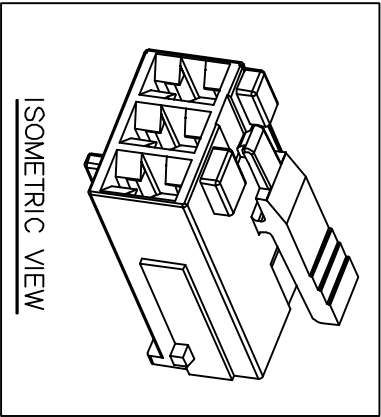

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 터미널 : ST730948-3/993-3
적용 R/HOLDER : MG633659-1
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

				MATERIAL	PBT(VO)	KIEIT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
				FINISH	NATURAL	
				WIRE RANGE	CLASS	
				INSULATION	TYPE	
△	ECO-1109-022 크기 수정	이동	정수영	'11.09.07		
△	설치시양변경(S10128)크기 도면 재작성	PM	KSH	'11.04.28		
LTR	REVISION RECORD	DR	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED
DR.	PSH.'09.06.10	CHK.	HAK			PART NAME
CHK.		APP.	BUC			250 3F HOUSING(L-B)