

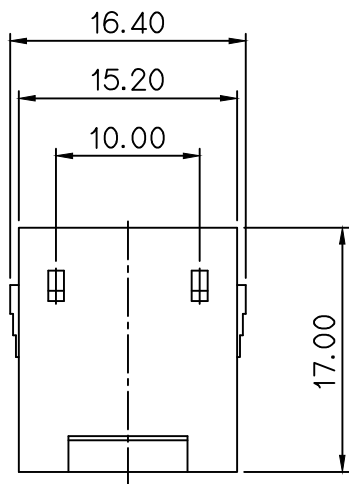


CUSTOMER DRAWING

PART NO. MG615168

DIMENSIONS IN (MM)

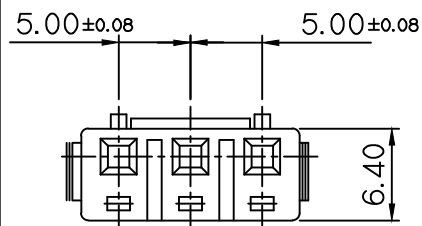

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

USED ON

주 기

- 1.지시하지 않은 반경 R은 0.2 - 0.3로 한다.
- 2.기능상 유해한 FLASH, 수축 및 WELDLINE등이 없을것.
- 3.적용 REAR HOLDR : MG635169-1
- 적용 TERMINAL: ST731299-3
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2 - 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK ,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE REAR HOLDER : MG635169-1
3. APPLICABLE TERMINAL : ST731299-3
- 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

ISSUE MARK

						MATERIAL		PA66(V0)	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		NATURAL	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
							SEE TABLE	2/1	MG615168
DR. KSH. '10.05.12			CHK.			5/12	PART NAME 5.0mm(PITCH) 3F HOUSING		
CHK.			APP.			5/12			