

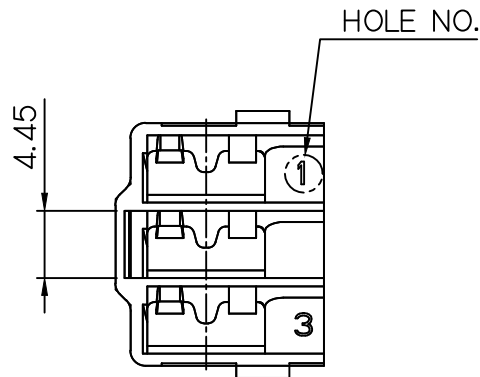
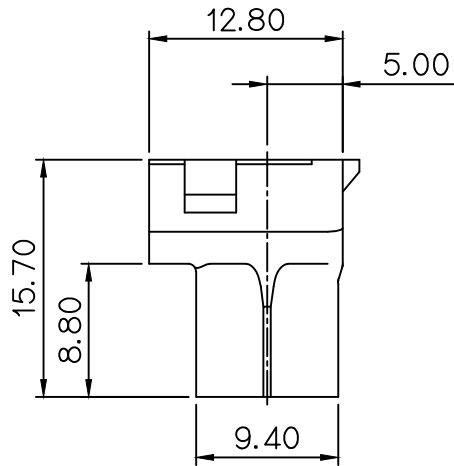
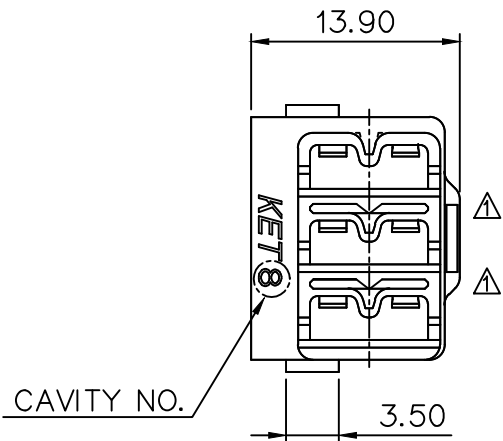


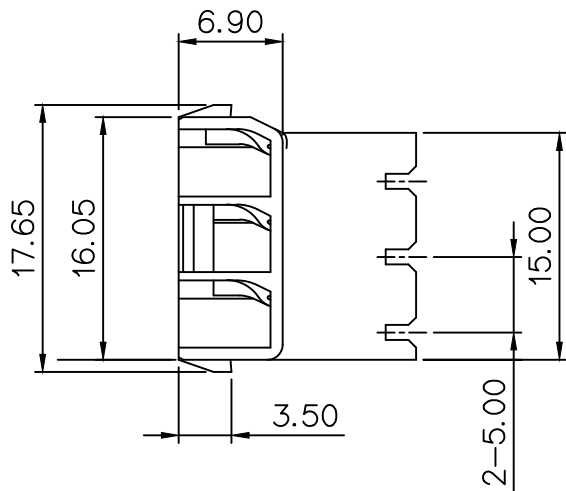

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	



NO.	MATERIAL	COLOR
0	PBT (TE5006F)	NATURAL
1		RED
2		BLUE
5		BLACK

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE REAR HOLDER : MG635391
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 리홀더 : MG635391
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

						MATERIAL PBT/TE5006F		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE			CLASS
						INSULATION			TYPE
	ECO-1305-043 근거 도면변경		BUC	'13.05.08					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG615390	
DR.	LCM '10.12.28	CHK. KSH				PART NAME 250 FLAG 3P HOUSING (P=5.00)			
CHK.		APP. BUC							