
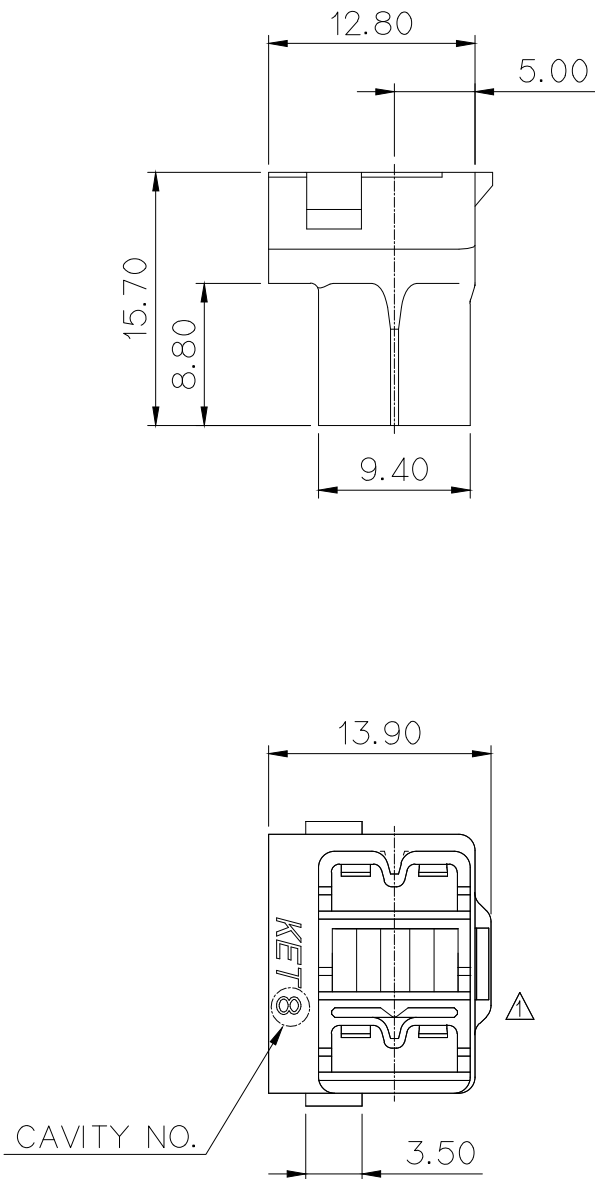
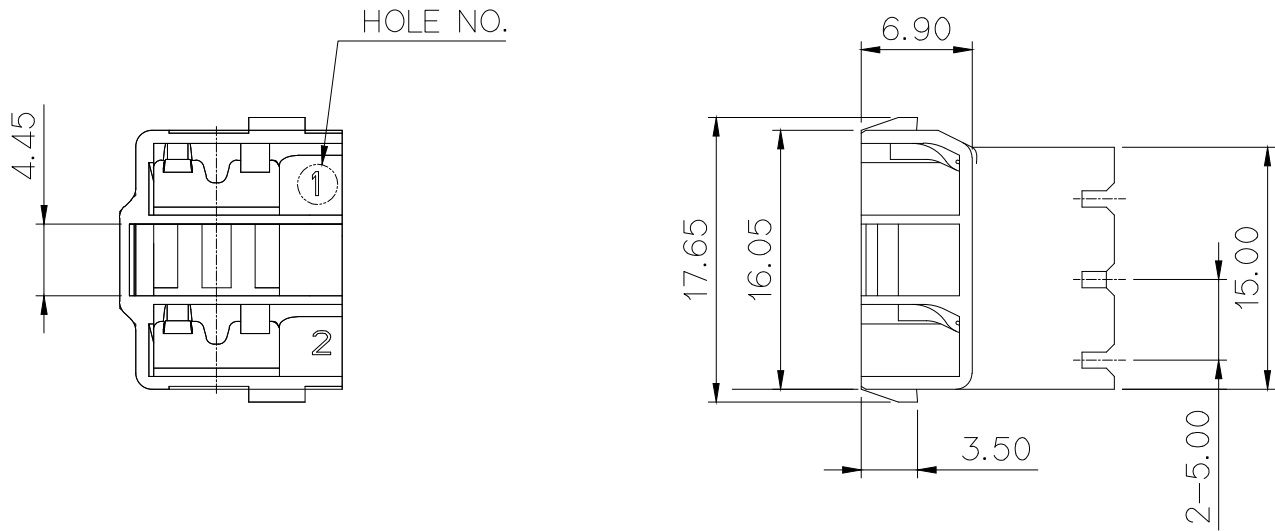




GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPICABLE REAR HOLDER : MG635391
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 리홀더 : MG635391
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL  PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
	ECO-1602-270 큰거 도면 재작성	LCM	KSH	BUC	'16.02.22	WIRE RANGE			CLASS
	ECO-1409-113 큰거 도면 재작성	LCM	KSH	BUC	'14.09.19	INSULATION			TYPE
	ECO-1305-043 큰거 도면변경	KSJ	KSH	BUC	'13.05.08	TOLERANCE EXCEPT AS NOTED SEE TABLE			PART NO.
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	SCALE 2/1	MG615390S	
DR.	KSJ '13.04.11		CHK.	KSH	'13.04.11		PART NAME		
CHK.			APP.	BUC	'13.04.11		250 FLAG 3P HOUSING (P=5.00)		