

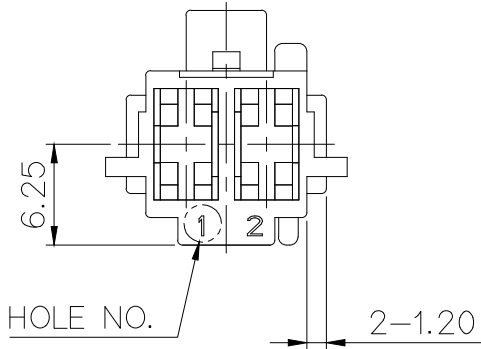
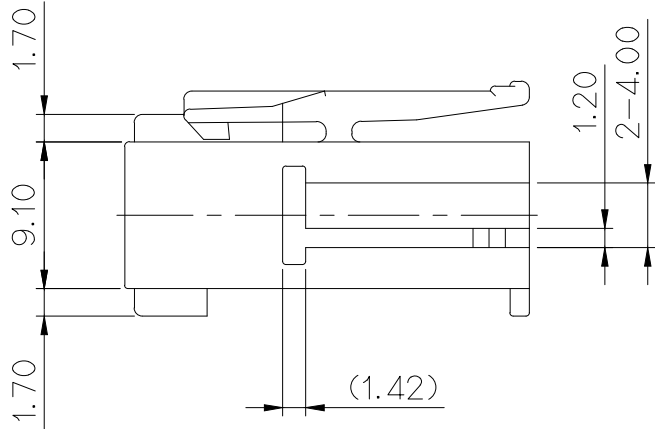


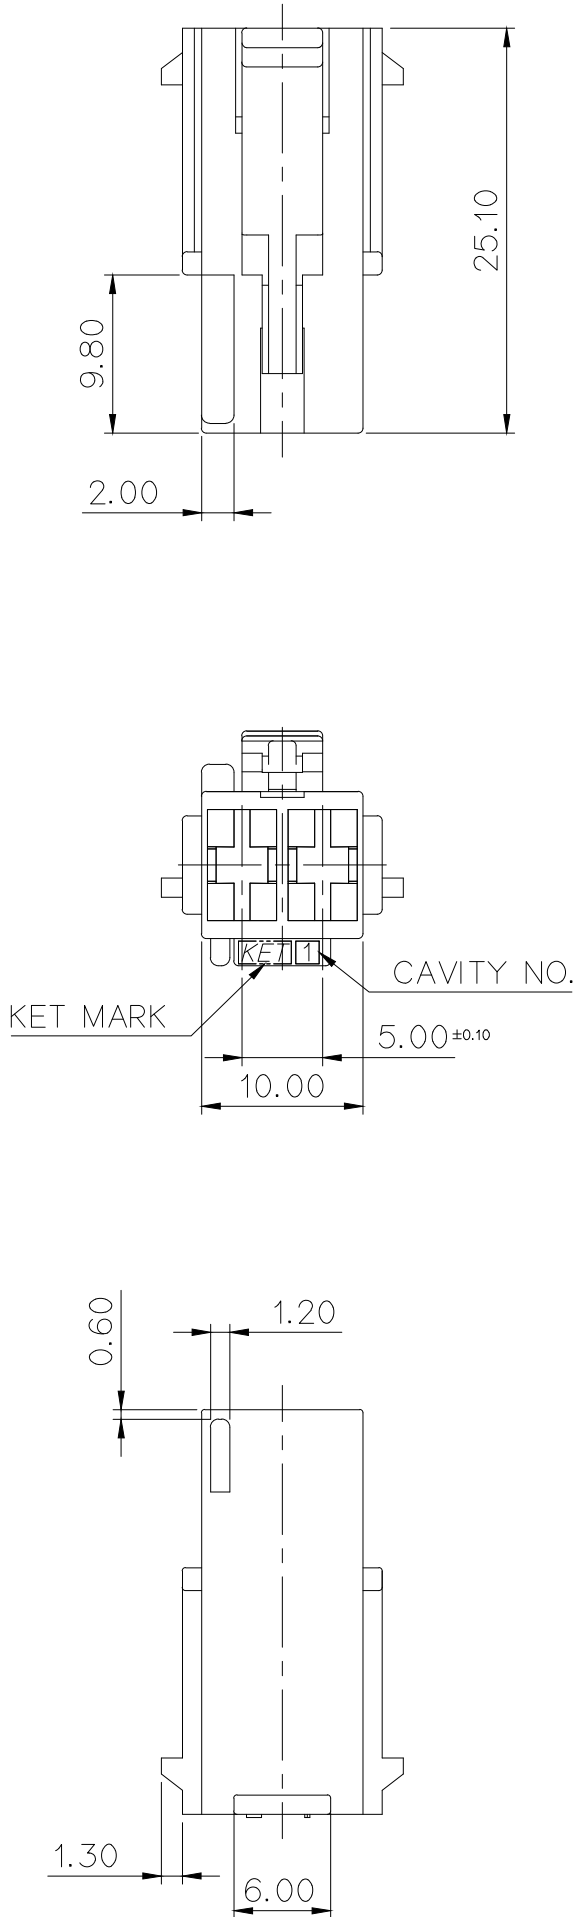

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	



ISOMETRIC VIEW

주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 3.적용 TERMINAL: ST730948-3/0993-3/1329-3/1393-3M
적용 R/HOLDER: MG633658-1
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730948-3/0993-3/1329-3/1393-3M
APPLICABLE R/HOLDER: MG633658-1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. *표기는 색상 표기임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

*

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL	PET+PC[TE5006FH]	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE	CLASS	
					INSULATION	TYPE	
	ECO-1803-430 근거 도면 재작성	LCM	KSH	BUC	18.03.28		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
	DR. LCM '10.12.09		CHK. KSH '10.12.09			SCALE	PART NO.
	CHK.		APP.  '10.12.09			2/1	MG615414-※02
						PART NAME	PUMP 2F HOUSING