

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30°	0.1	

- NOTE
1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730948-3/993-3

APPLICABLE R/HOLDER : MG633659-1

3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.

2. 적용 터미널 : ST730948-3/993-3







적용 R/HOLDER : MG633659-1

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

CUSTOMER DRAWING

PART NO.

MG615560

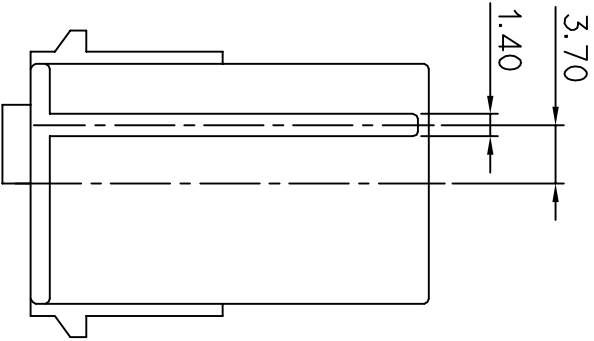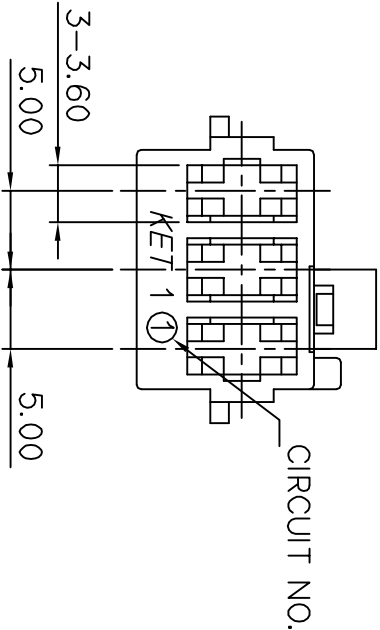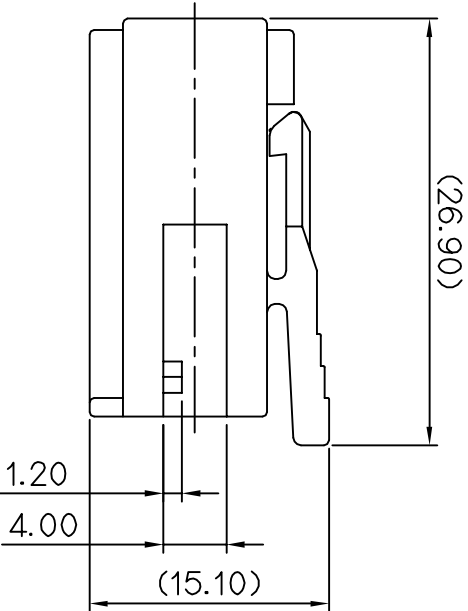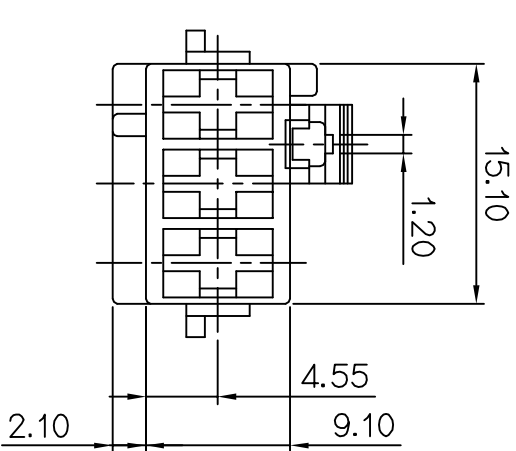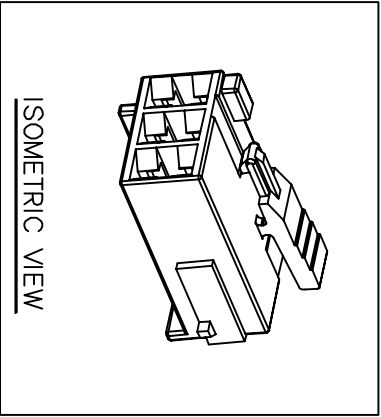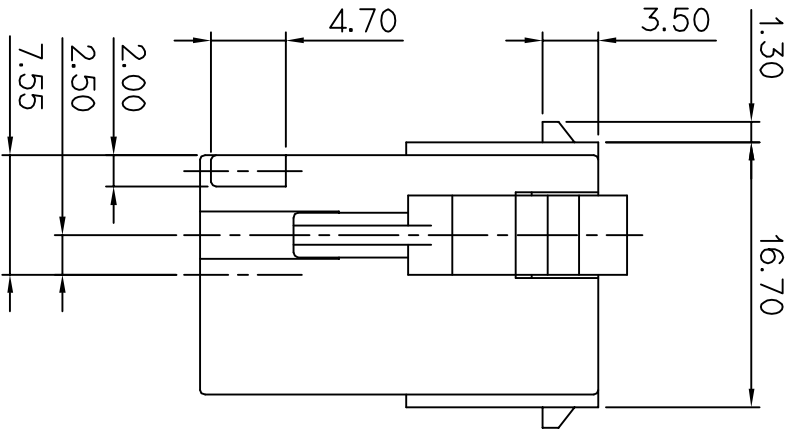

NO.	MATERIAL	COLOR
0	PBT (V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

						MATERIAL	PBT(V0)	KIEIT KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.		
						FINISH	NATURAL			
						WIRE RANGE				
						INSULATION				
								CLASS		
								TYPE		
								250 DOOR LOCK		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	PART NO.
DR.	LCM. '12.09.04								2 / 1	MG615560
CHK.		APP.				PART NAME		250 3FHOUSING		

ISSUE MARK