

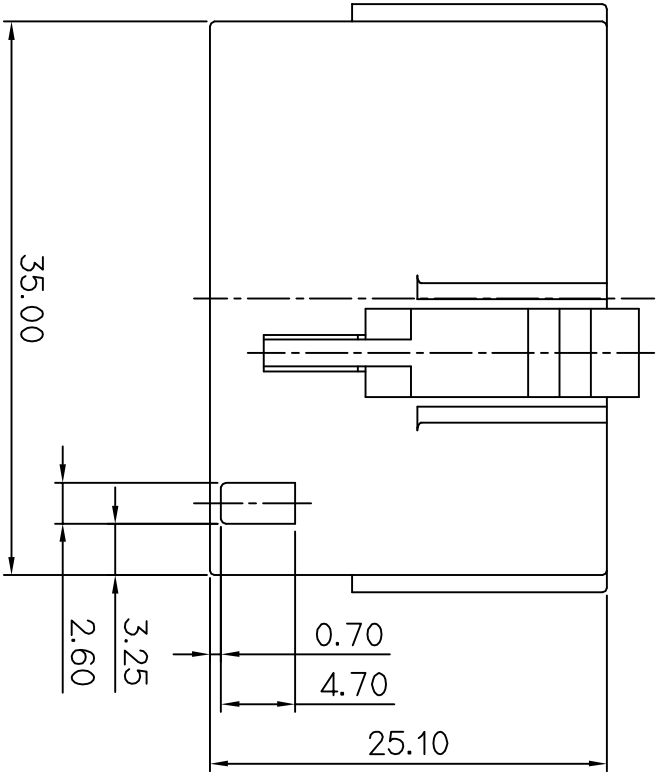
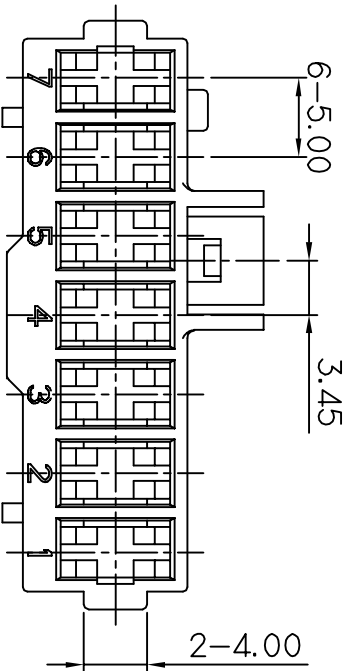
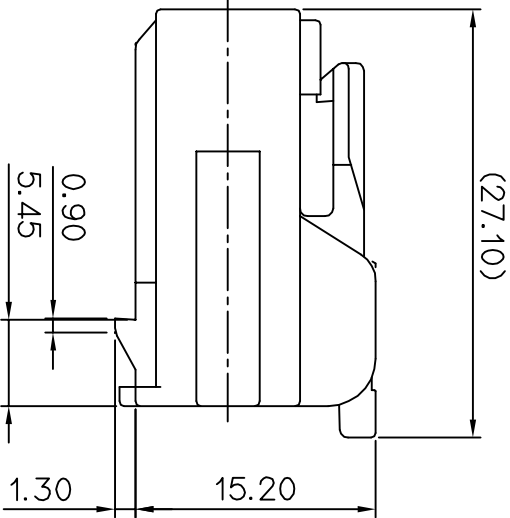
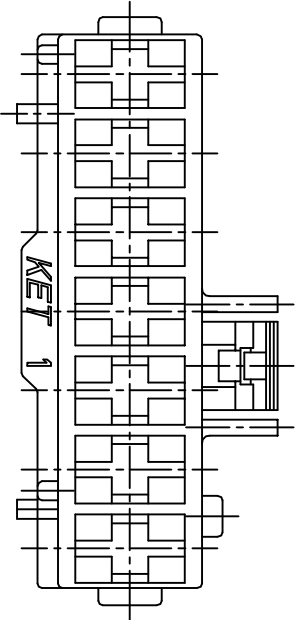


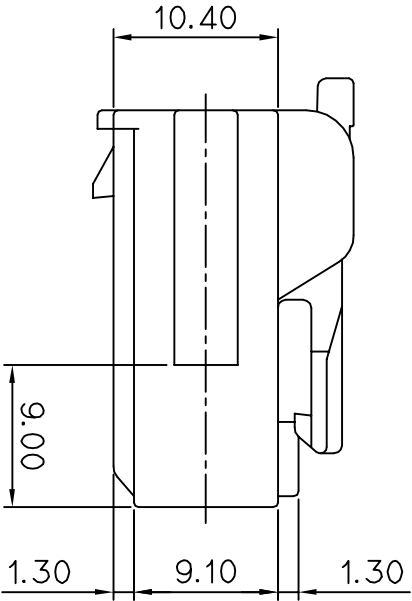

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE TERMINAL : ST730948-3, ST730993-3
- APPLICABLE R/HOLDER : MG635164



주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.
- 적용 TERMINAL : ST730948-3, ST730993-3
- 적용 R/HOLDER : MG635164

ISSUE MARK

NO.	MATERIAL	COLOR
0	PBT (VO)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

						MATERIAL	PA66(V0)	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	NATURAL	
						WIRE RANGE	CLASS 250	
						INSULATION	TYPE	
LTR	REVISION RECORD	DR	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		PART NO.
DR.	LCM '12.09.04	CHK.	KSH '12.09.04			SEE TABLE	SCALE 2/1	MG615561
CHK.	APP.		'12.09.04			PART NAME	250 7F HOUSING	