
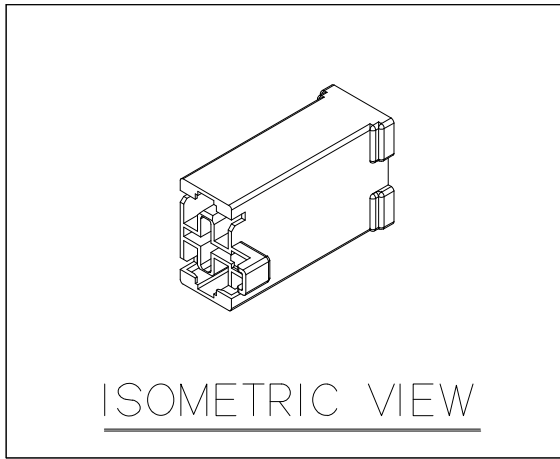
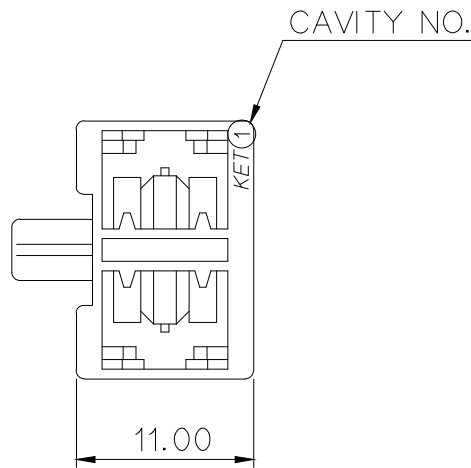
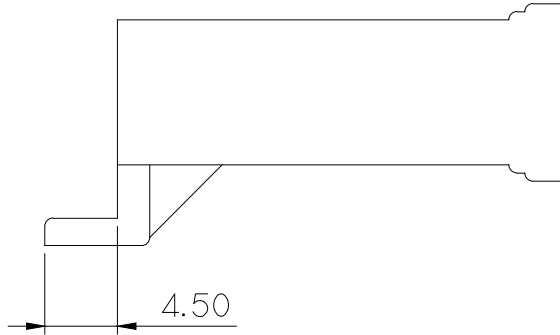
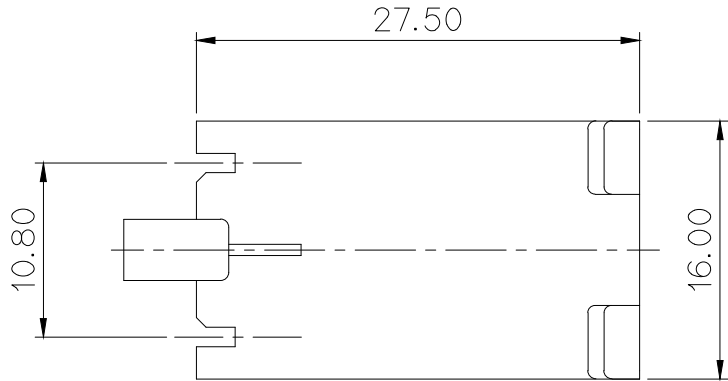


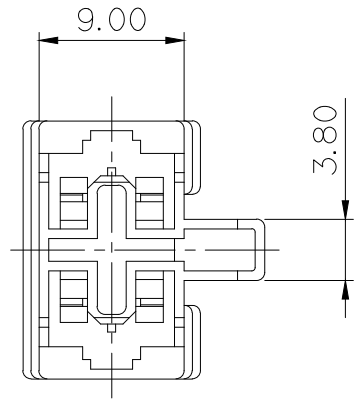

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- APPICABLE TERMINAL : ST730570-3/571-3/572-3 (P-LOCK TYPE)
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 지시하지 않은 모든 R은 0.3R.
- 적용 터미널 : ST730570-3/571-3/572-3 (P-LOCK TYPE)
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

PART NO. *표시는 색상 표기임.


NO.	COLOR
* 0	NATURAL
1	RED
* 2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL PET+PC(GWIT)			KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE			
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG615570T-02
DR. LYS '17.11.01			CHK. PSH '17.11.01			PART NAME			
CHK. KSH '17.11.01			APP. BUC '17.11.01			REGULATOR 2P HOUSING B TYPE			