
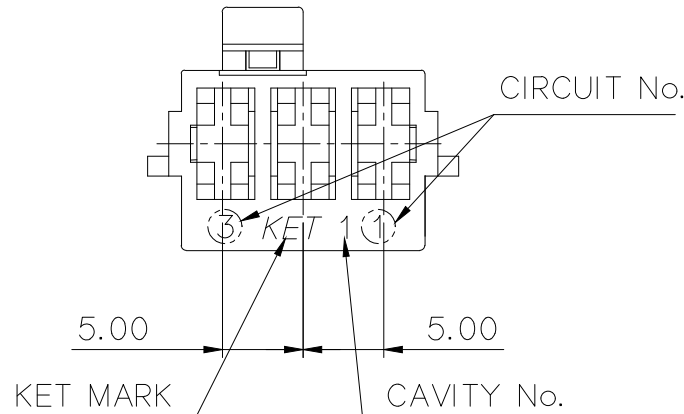
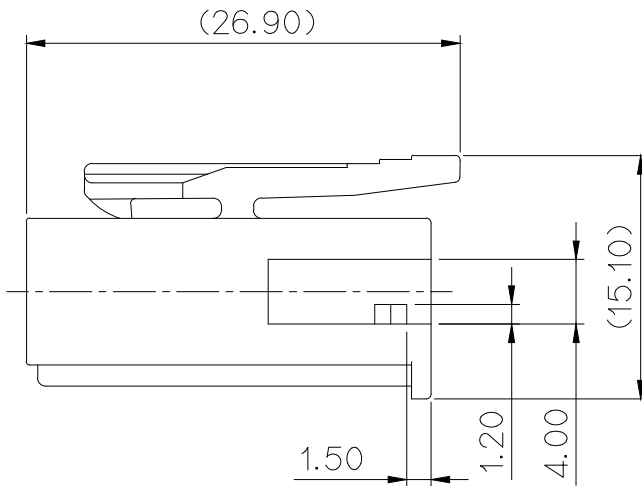
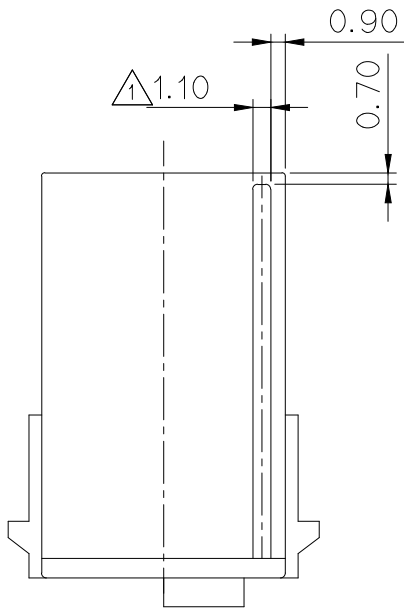
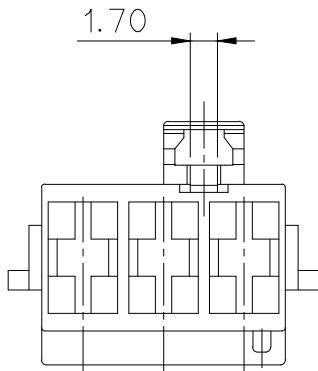
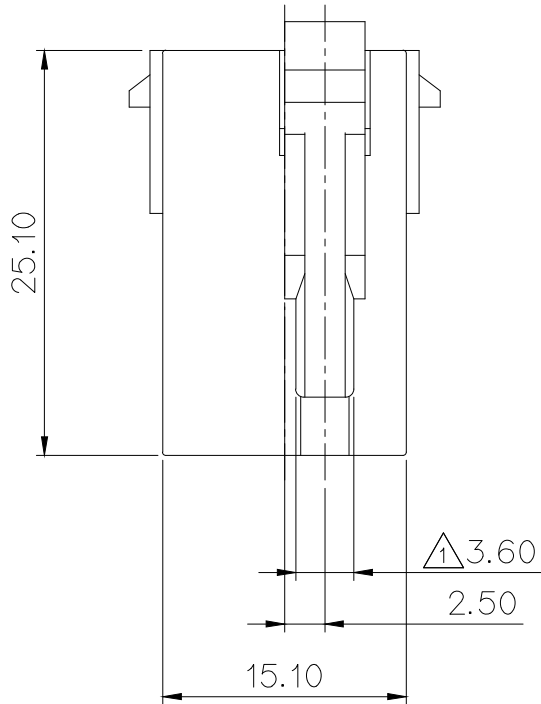
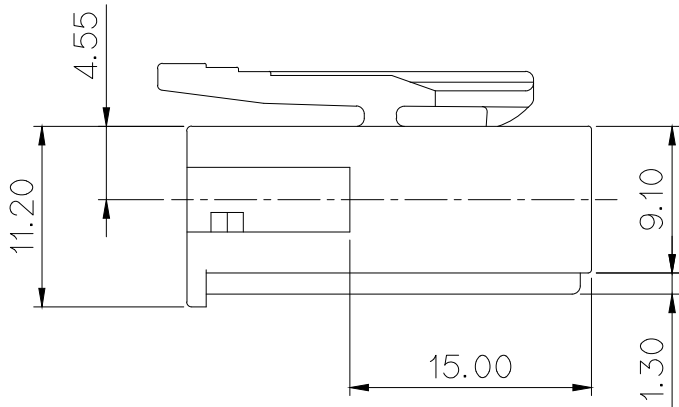


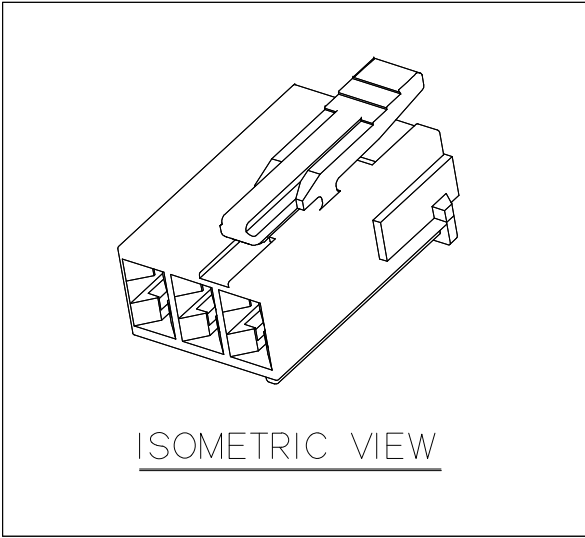

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 2.적용 TERMINAL : ST730948, ST730993, ST731329
- 3.적용 REAR HOLDER : MG633659
- △ 4.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NO.	MATERIAL	COLOR
0	PET/PC (G.W.I.T)	NATURAL
1		RED
2		BLUE
5		BLACK

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730948, ST730993, ST731329
3. APPLICABLE REAR HOLDER : MG633659
- △ 4.10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
						WIRE RANGE		CLASS		250
						INSULATION		TYPE		
△	ECO-2001-121급거 도면 재작성		YHJ	KSH	KHG	'20.01.10				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE		TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
								SEE TABLE	2/1	MG615588
DR. LCM '14.02.11			CHK. PSH '14.02.11			PART NAME 250 3P HOUSING (R-C)				
CHK. KSH '14.02.11			APP. BUC '14.02.11							

APPROVED

2020-12-24

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK