

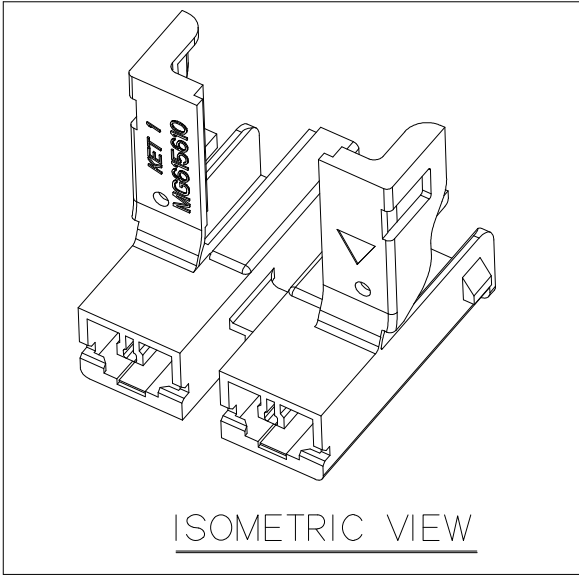
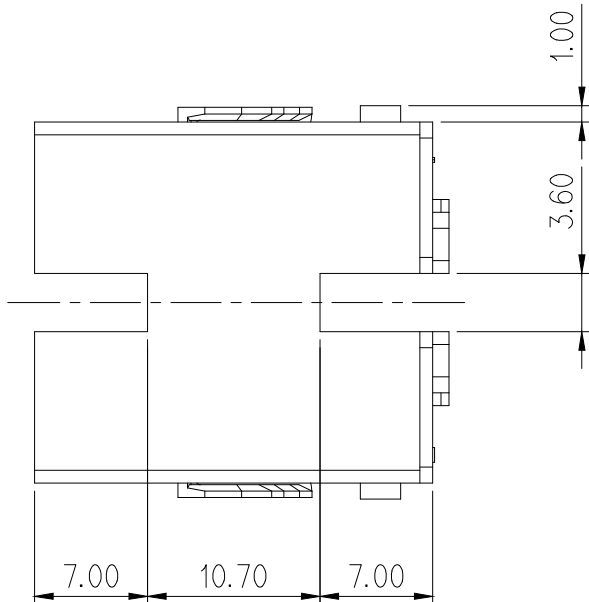
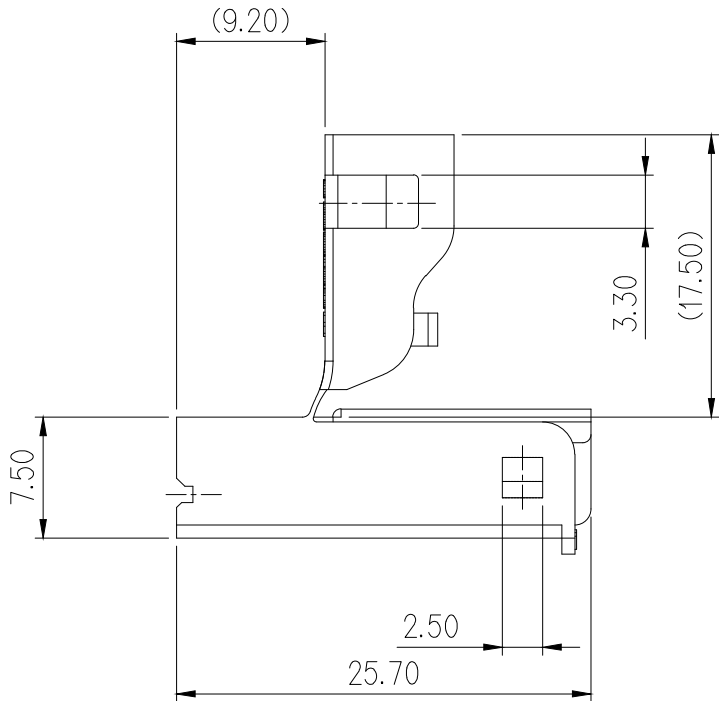


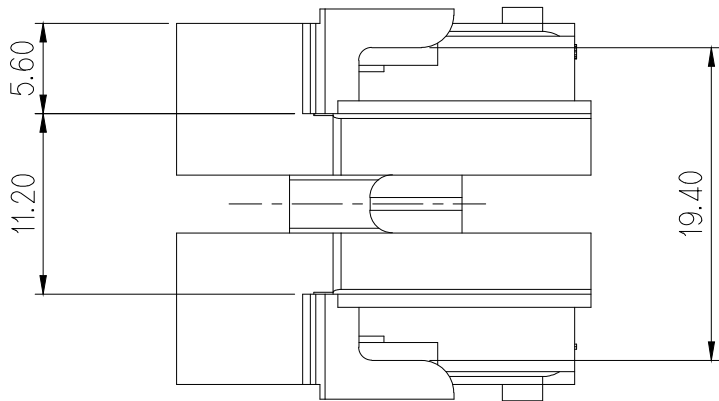

ISOMETRIC VIEW

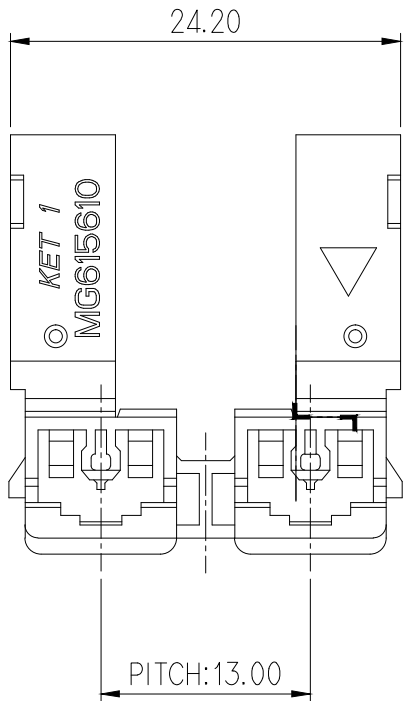

△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

주 기

- 1.지시하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELDLINE 없을 것.
- 3.적용 TERMINAL: ST731394-3S,3M,3L,3XL
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 3.APPLICABLE TERMINAL : ST731394-3S,3M,3L,3XL
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

	NO.	MATERIAL	COLOR
*	0	PET+PC (GWIT)	NATURAL
*	1		RED
*	2		BLUE
*	3		YELLOW
*	4		GRAY
*	5		BLACK
△ *	6		GREEN

					MATERIAL		PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.								
					FINISH		PRE-TIN										
						WIRE RANGE		#22-#10 /1569#22*2 1569#20*2/1569#20+22		CLASS	P-LOCK II						
						INSULATION				TYPE	250						
LTR		REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	2/1	PART NO.	MG615610		
DR.					KSH.			'16.05.17	CHK.								
CHK.					APP.			BUC.	'16.05.17	PART NAME						250 P-LOCK II 2P HS'G(HINGE)	

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK