

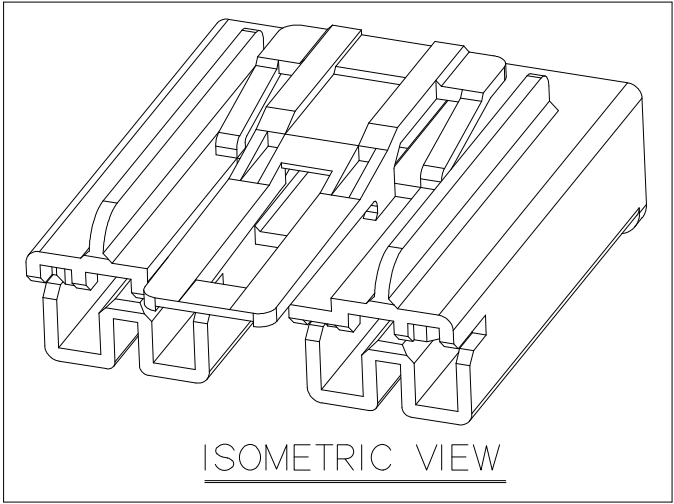
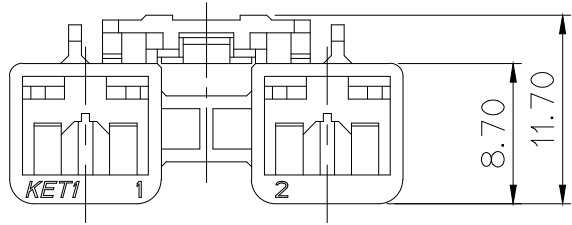
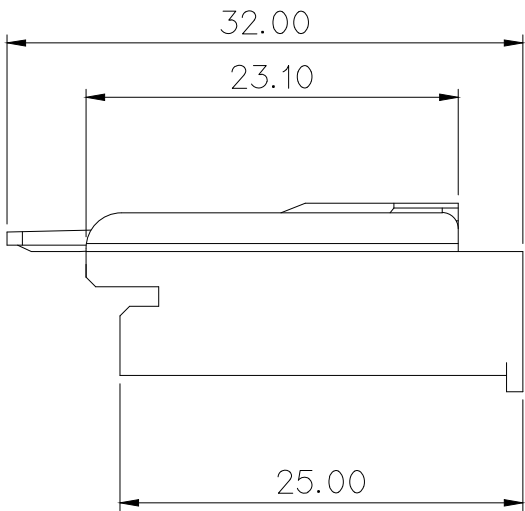


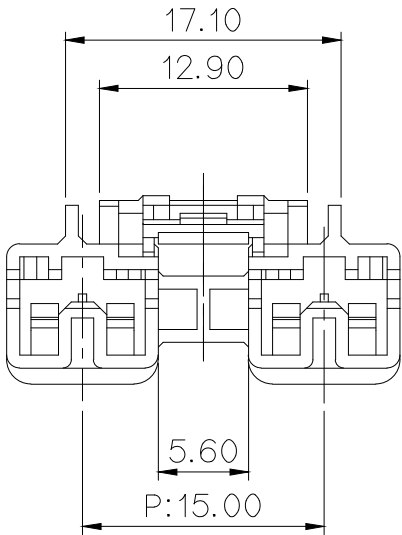

ISOMETRIC VIEW

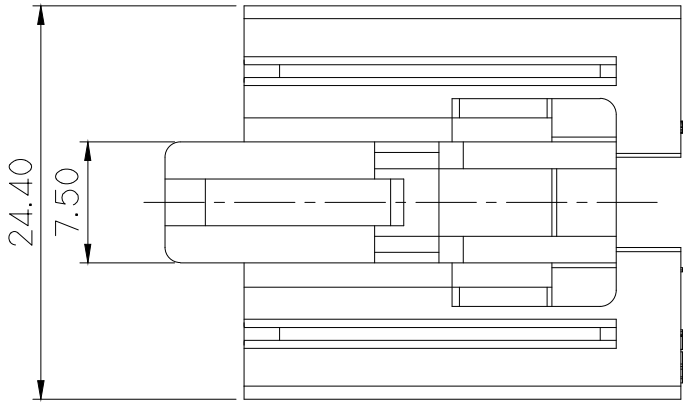

	NO.	MATERIAL	COLOR
*	0	PET+PC (GWIT)	NATURAL
*	1		RED
*	2		BLUE
	3		YELLOW
	4		GRAY
*	5		BLACK

						MATERIAL	PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE		
						WIRE RANGE	#22 – #10		
						INSULATION			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG615611
DR. KSH. '16.07.16			CHK.			PART NAME			
CHK.			APP. BUC. '16.07.16			250 P–LOCK 2P HS'G(LEVER)			

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시하지 않은 반경 R은 0.2-0.3로 한다.
- 기능상 유해한 BURR 및 WELDLINE 없을 것.
- 적용 TERMINAL: ST731394-3S,3M,3L,3XL
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2-0.3 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731394-3S,3M,3L,3XL
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK