


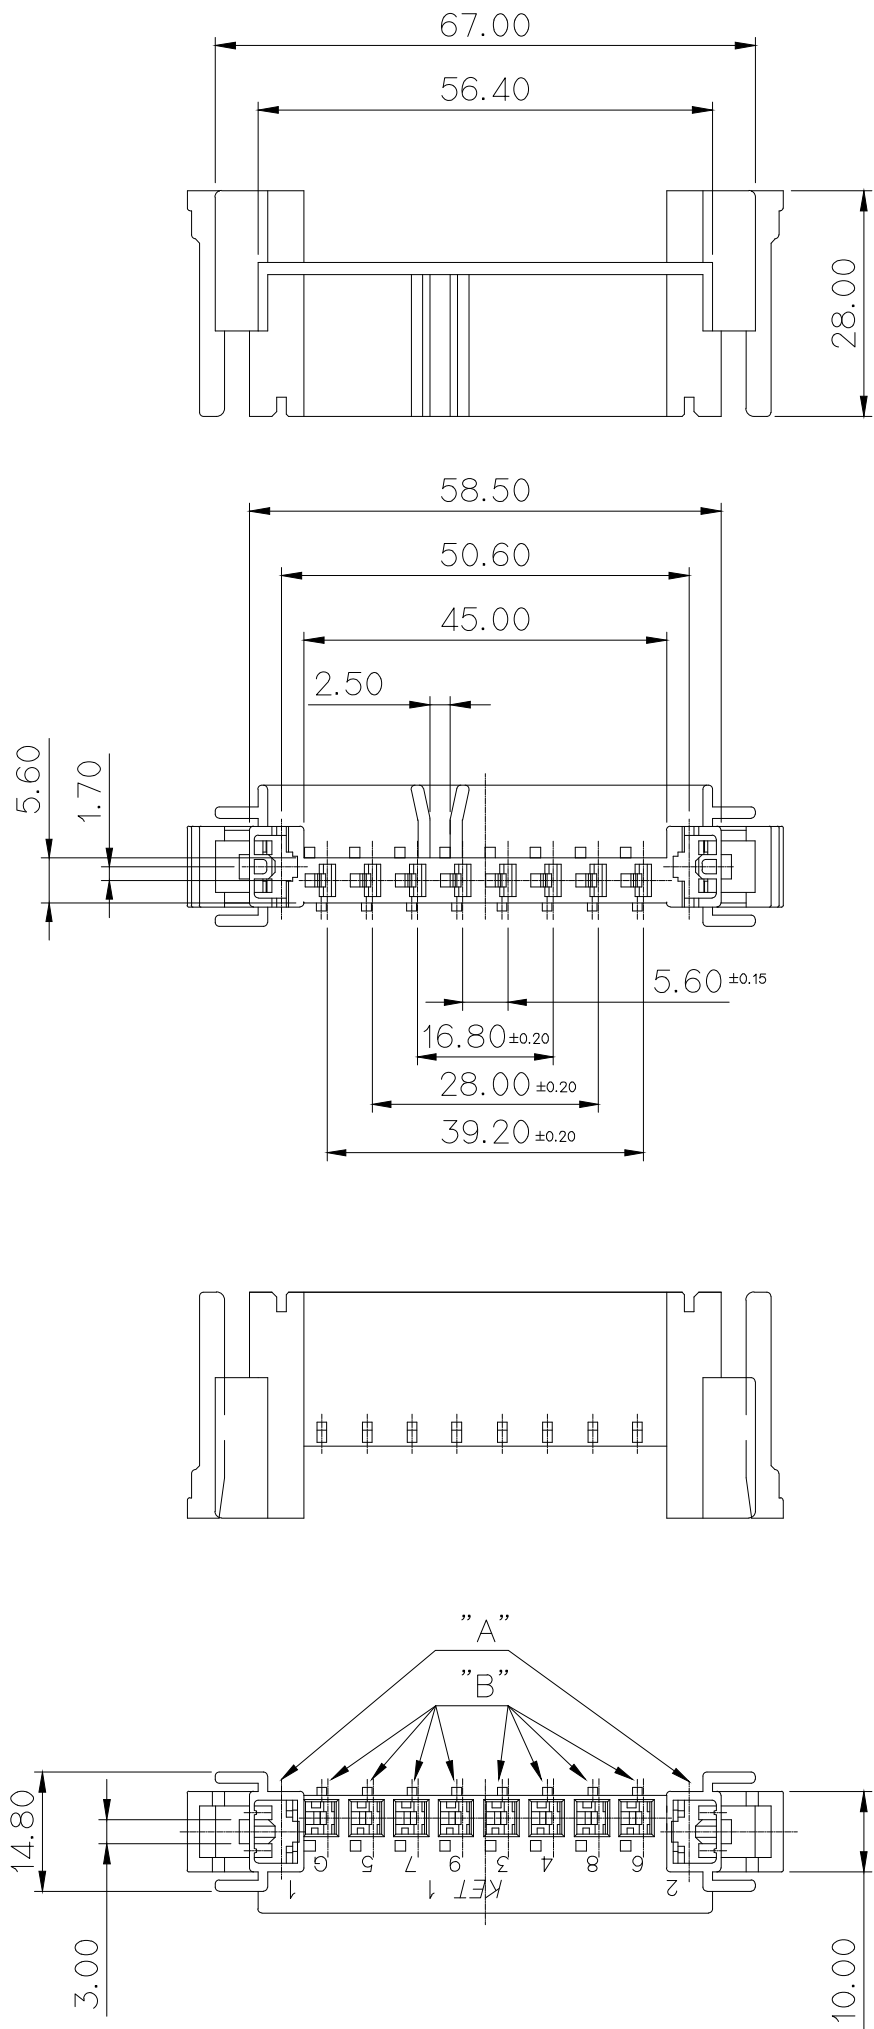

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	45MIN	()	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.55	±1.00	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- APPLICABLE R/HOLDER : MATING HOLE "A", "B"
 - * A(250 P-LOCK) – MG635572-2
 - * B(125 SERIES) – MG635573-2
- APPLICABLE TERMINAL : MATING HOLE "A", "B"
 - * A(250 P-LOCK) – ST730570, ST730571
 - * B(125 SERIES) – ST731342

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 적용 R/HOLDER : 적용 홀 "A", "B"
 - * A(250 P-LOCK) : MG635572-2
 - * B(125 SERIES) : MG635573-2
- 적용 TERMINAL : 적용 홀 "A", "B"
 - * A(250 P-LOCK) : ST730570, ST730571
 - * B(125 SERIES) : ST731342

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH NATURAL			
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG615619
DR. PSH.		CHK. KSH.				PART NAME			
CHK.		APP. BUC.				MOTOR MULTI 10F HOUSING			