
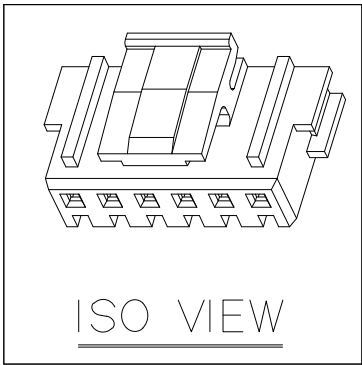
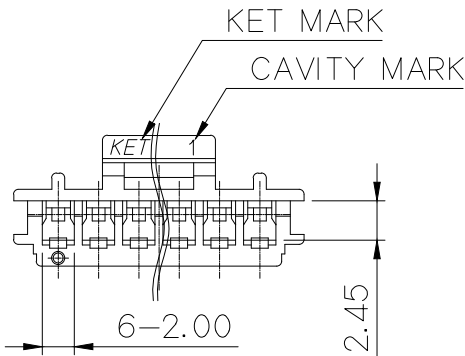
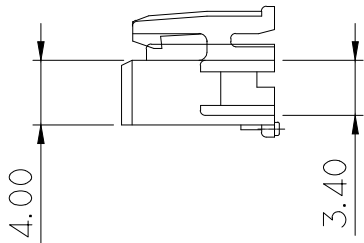

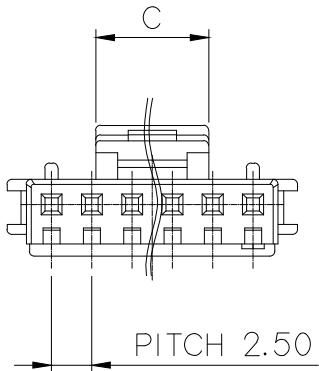


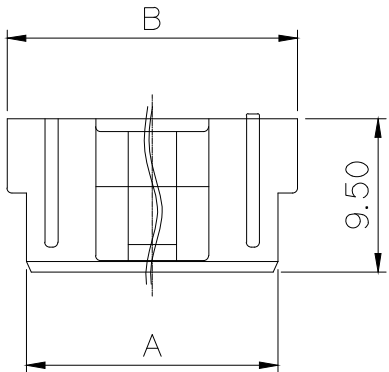


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

PIN	PART NO.	A	B	C
2	615632-∗02	5.6	8.0	5.0
3	615632-∗03	8.1	10.5	△ 3.0
4	615632-∗04	10.6	13.0	5.0
5	615632-∗05	13.1	15.5	5.0
6	615632-∗06	15.6	18.0	7.0
7	615632-∗07	18.1	20.5	9.8
8	615632-∗08	20.6	23.0	12.3
9	615632-∗09	23.1	25.5	14.8
10	615632-∗10	25.6	28.0	14.8
11	615632-∗11	28.1	30.5	14.8
12	615632-∗12	30.6	33.0	14.8
13	615632-∗13	33.1	35.5	14.8
14	615632-∗14	35.6	38.0	14.8
15	615632-∗15	38.1	40.5	14.8

△	NO.	COLOR
*	0	NATURAL
*	1	RED
	2	BLUE
	3	YELLOW
	5	BLACK
	6	GREEN

주 기

- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
3. MATING R/HOLDER : MG635826-∗NN
4. MATING TERMINAL : ST731454
5. MATCHING PCB ASS'Y : MG646077-∗NN
6. ∗ : COLOR

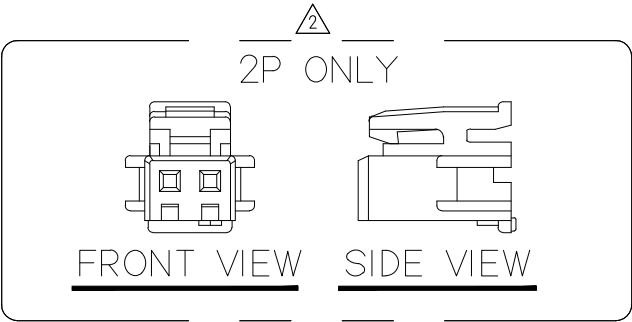

						MATERIAL		PET+PC(GWIT)			KOREA ELECTRIC	
						FINISH		SEE TABLE			TERMINAL CO., LTD.	
						WIRE RANGE				CLASS	2.5mm WTB	
						INSULATION				TYPE		
△2	ECO-1812-406 근거 재작성	PSH	KSH	KHG	'18.12.28							
△1	ECO-1806-021 근거 재작성	YHJ	KSH	BUC	'18.06.05							
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG615632-*NN	
DR.		PSH.		CHK.		KSH.		PART NAME 2.5 HS'G (2F~15F)				
CHK.		APP.		BUC.								

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK