

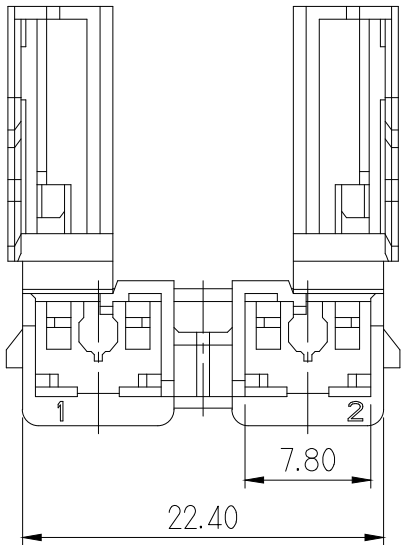
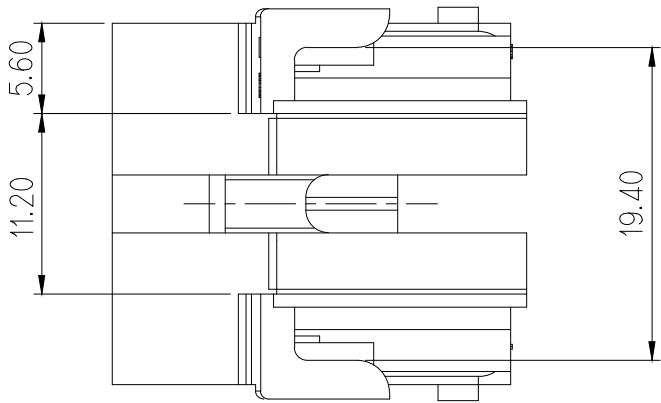
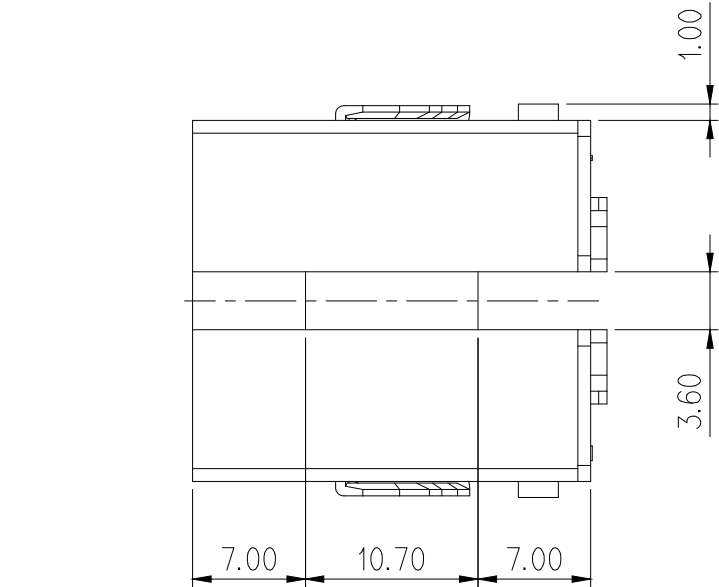
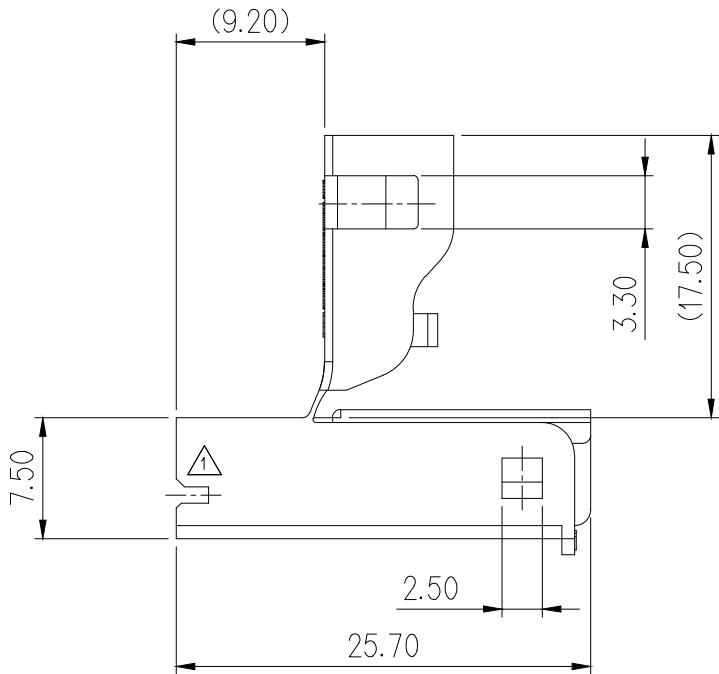


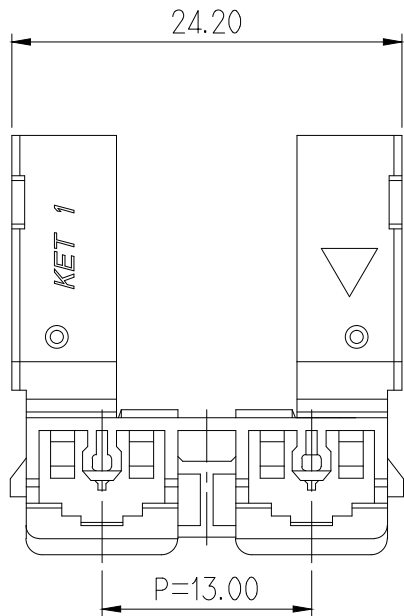

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	



주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C은 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE 없을 것.
- 4.적용 TERMINAL: ST731394-3S,3M,3L,3XL
- 5.제품 내 함유 된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

NOTE

- 1.UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- 2.UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 RADIUS.
- 3.MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 4.APPLICABLE TERMINAL: ST731394-3S,3M,3L13XL
6. 6HAXARDUS SUBSTANCES IN PART (Lead, Mercury, Cadmium Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS PEGULATION

-.PART NO. *표시는 색상표기 임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE		CLASS P-LOCK II	
	ECO-1811-476 근거 도면 재작성	LCM	KSH	KHG	'18.11.28	INSULATION		TYPE 250
	ECO-1804-309 근거 도면 재작성	LCM	KSH	BUC	'18.04.23	TOLERANCE EXCEPT AS NOTED		SCALE 2/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.		MG615640-*02
DR. LCM '18.04.23		CHK. PSH '18.04.23		PART NAME				
CHK. KSH '18.04.23		APP. BUC '18.04.23		250 P-LOCK 2P HS'G(HINGE GUIDE)				