

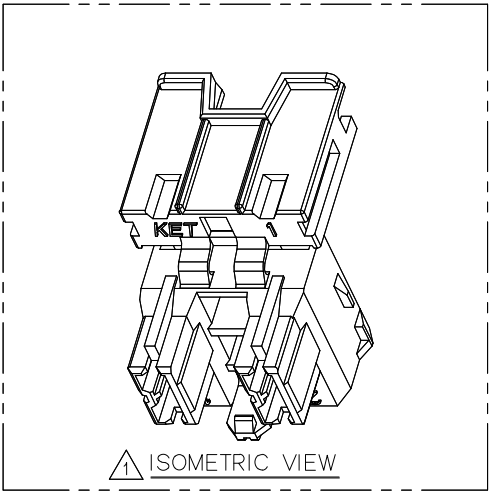
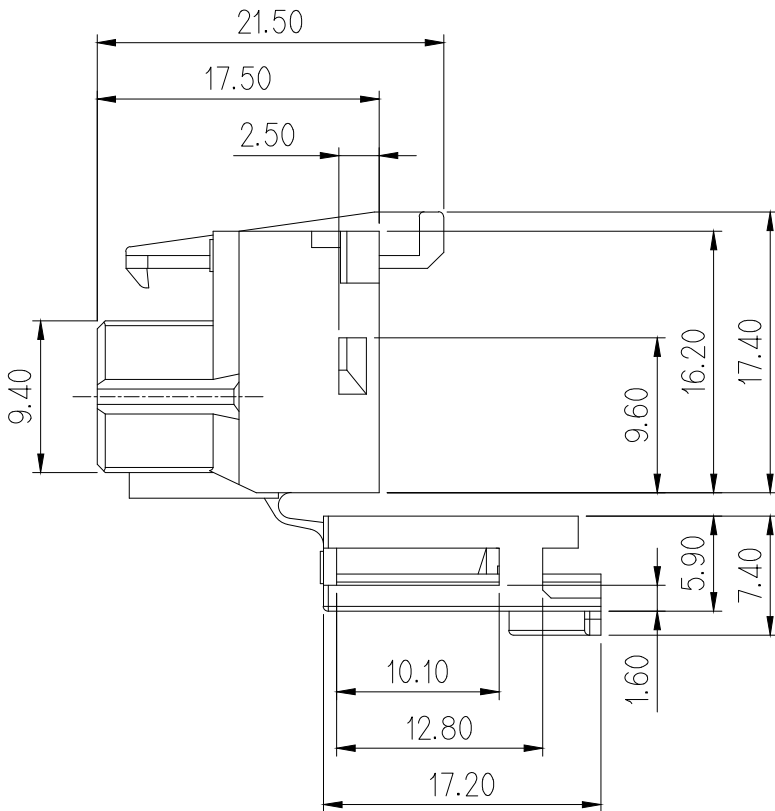


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

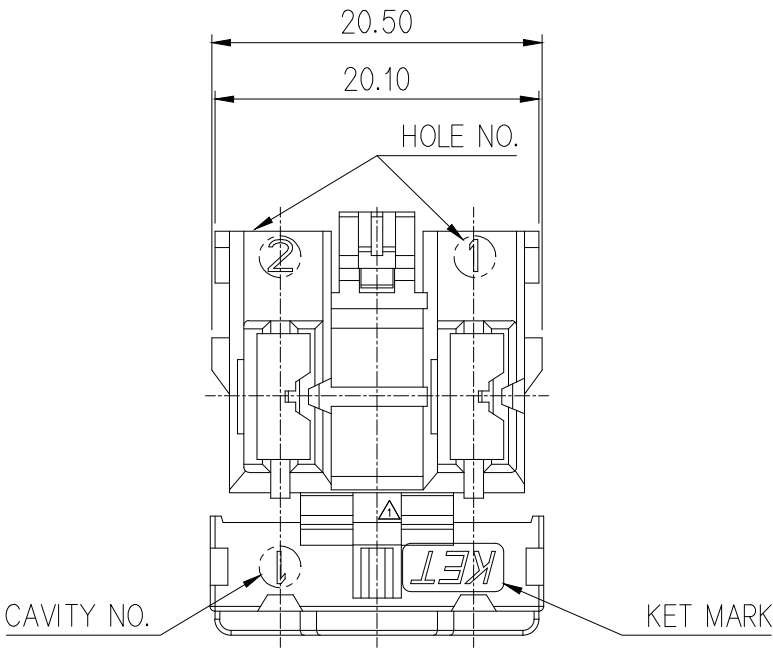

ISOMETRIC VIEW

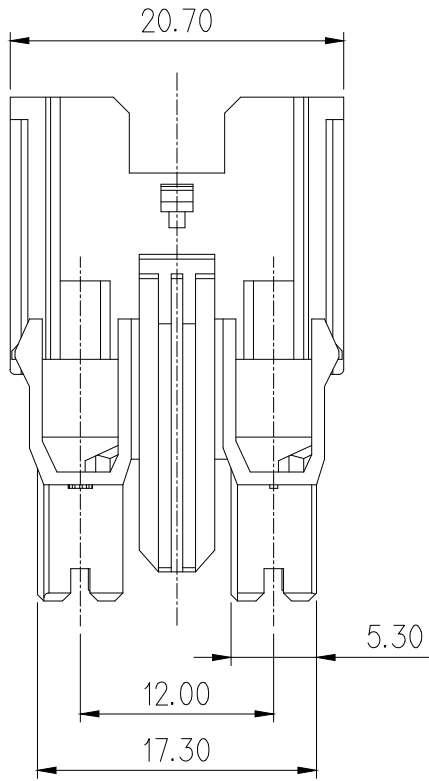

NO.	MATERIAL	COLOR
0	PET+PC (GWIT)	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK

APPROVED

2021-03-31

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

WIRE RANGE CLASS 250 P-LOCK
INSULATION TYPE

TOLERANCE EXCEPT AS NOTED SEE TABLE
SCALE 2/1
PART NO. MG615649-002

PART NAME 250 P-LOCK FLAG 2F HS'G(HINGE)

					MATERIAL	SEE TABLE
					FINISH	SEE TABLE
					WIRE RANGE	CLASS 250 P-LOCK
					INSULATION	TYPE
ECO-1902-323 근거 도면 작성	LYS	KSH	KHG	19.02.26	TOLERANCE EXCEPT AS NOTED	SEE TABLE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE 2/1
DR.	LYS. '18.10.18	CHK.	PSH. '18.10.18			PART NAME
CHK.	KSH. '18.10.18	APP.	BUC. '18.10.18			250 P-LOCK FLAG 2F HS'G(HINGE)

주 기

- 1.기능상 유해한 BURR 및 WELDLINE 없을 것.
- 2.적용 TERMINAL : ST730649-3
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730649-3
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.