



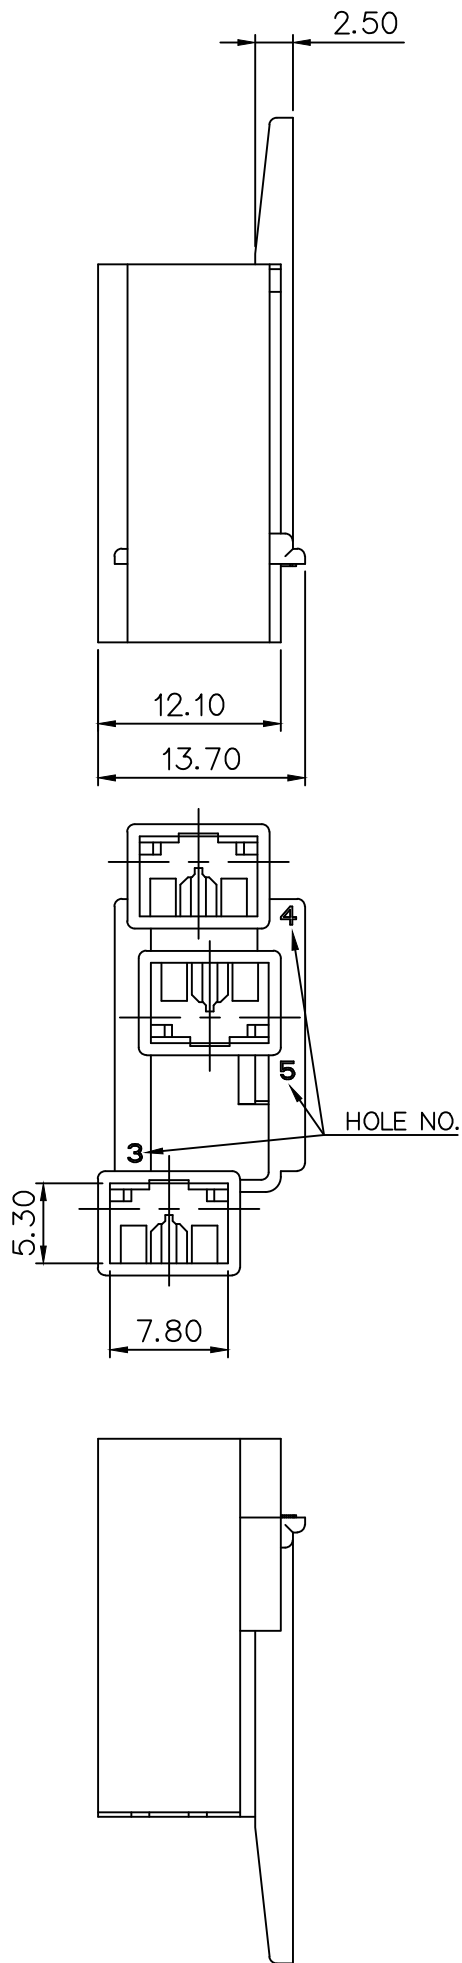

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE TERMINAL : ST731394-3S,M
3. 10HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium
Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP)
SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

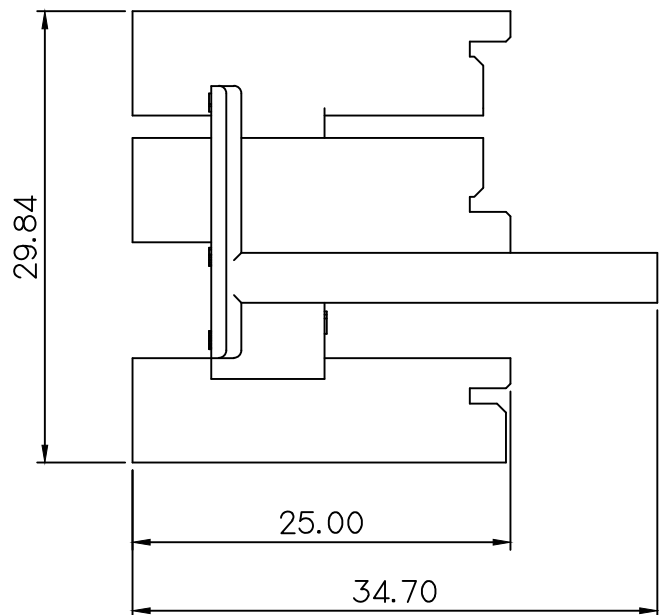

주 기




1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 터미널 : ST731394-3S,M
3. 제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침
및 RoHS 법규에서 지정한 최대 허용농도를 초과하지 말 것.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

PART NO. *표시는 색상 표기임.

NO.	COLOR
* 0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

ISOMETRIC VIEW

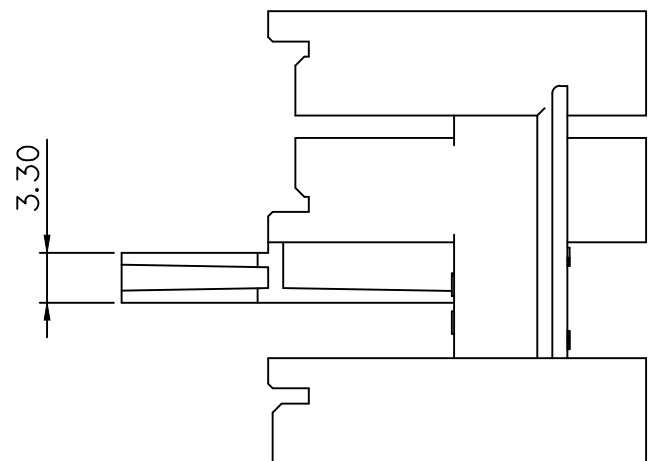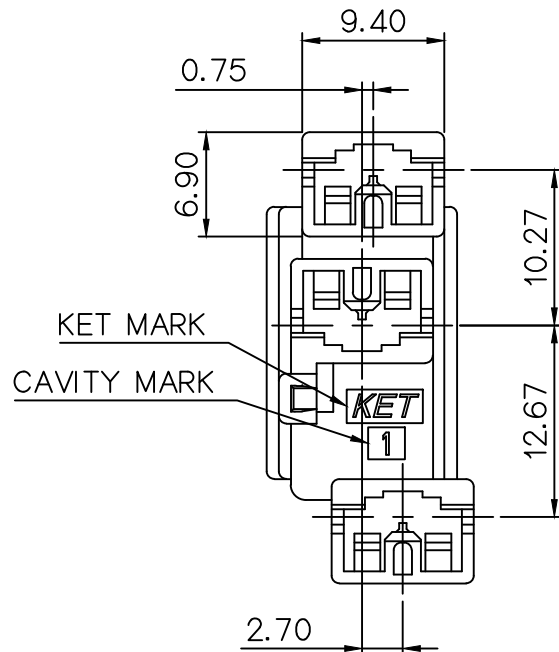

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE		CLASS		
					INSULATION		TYPE 250 P-LOCK		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG615692-※03
DR. PSH '21.01.06			CHK.			PART NAME			
CHK.			APP. KSH '21.01.06			REGULATOR 3F HSG (RS)			