
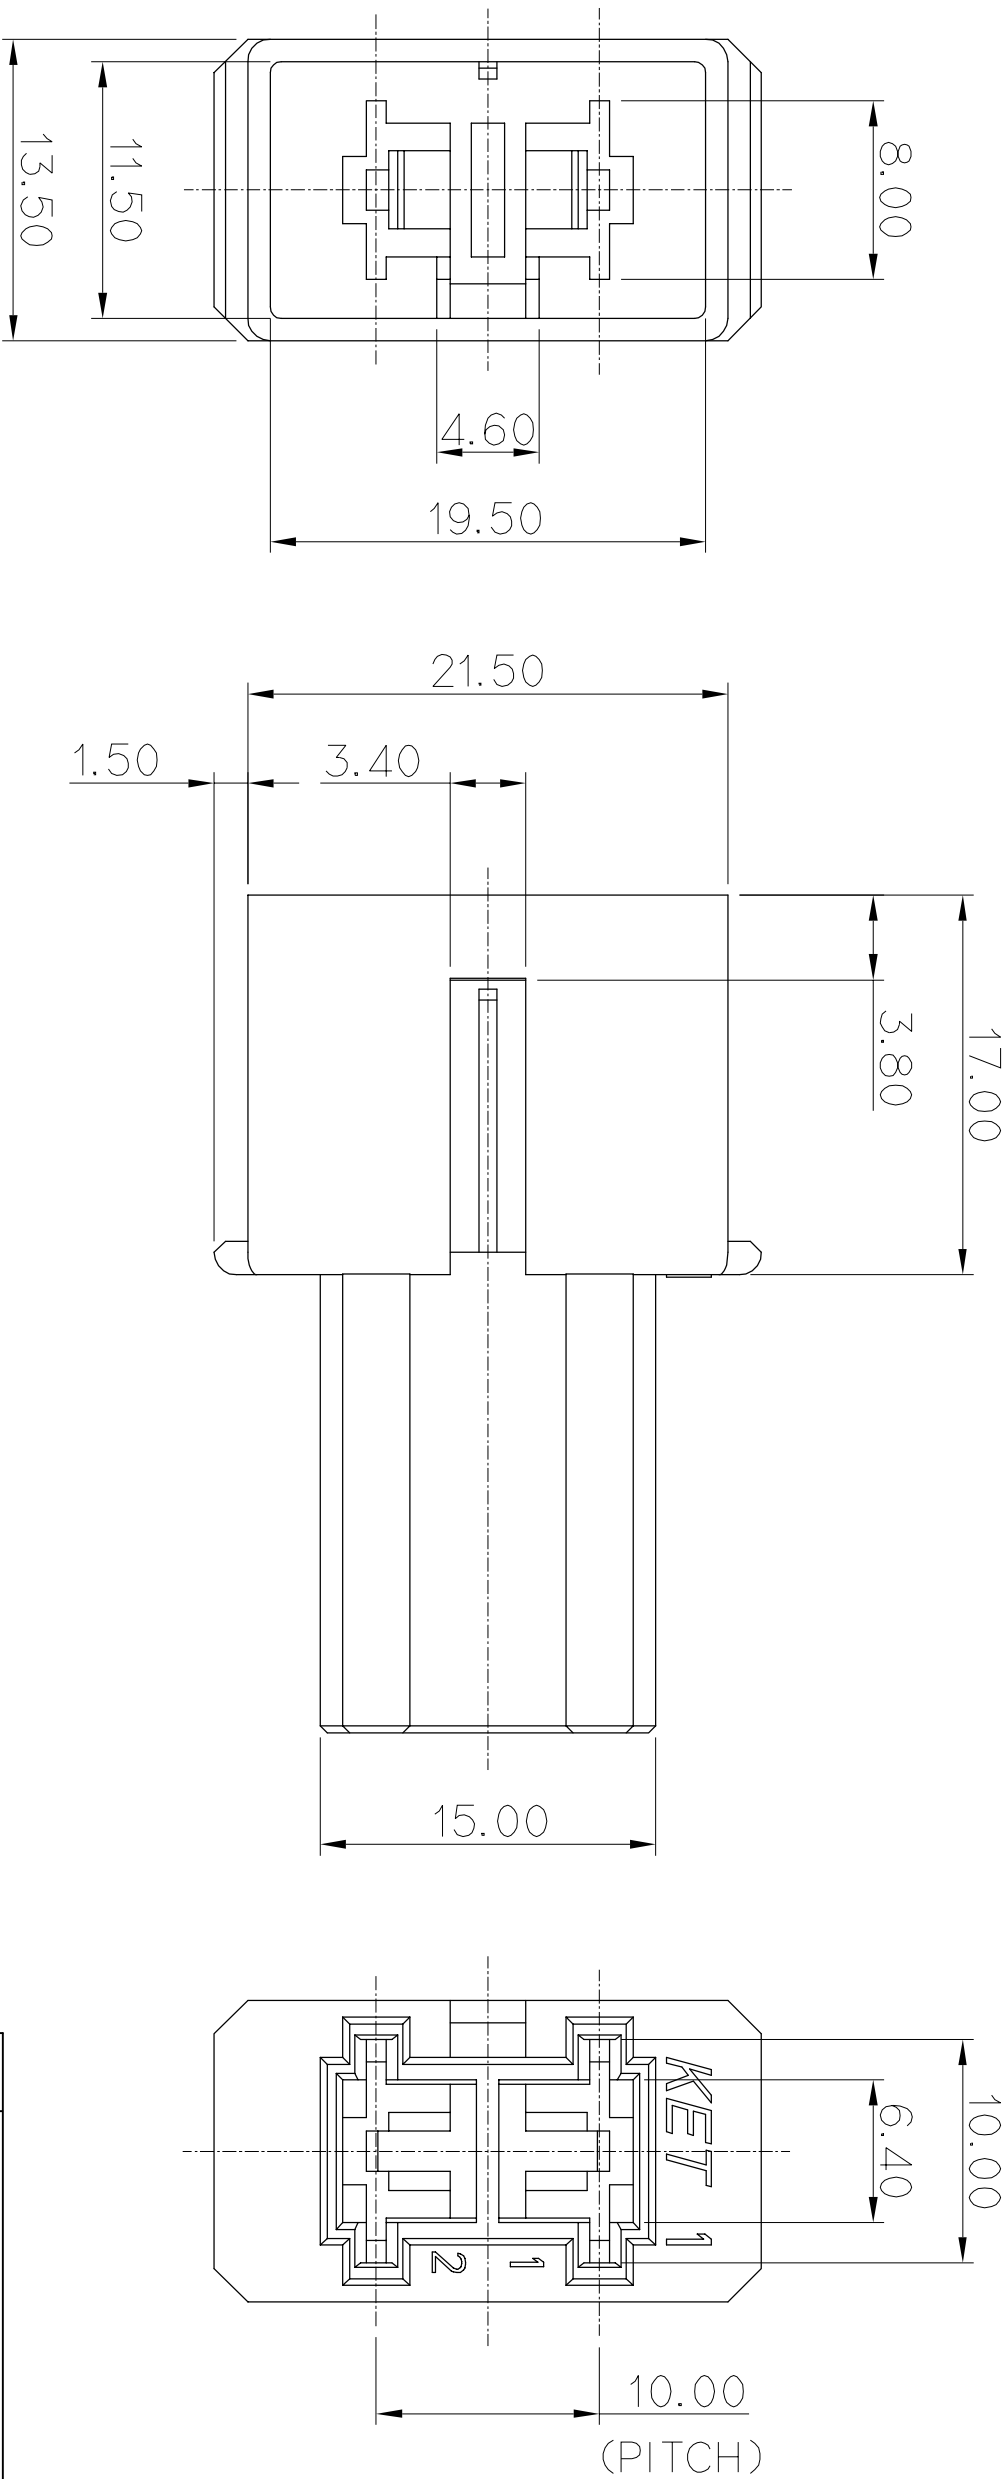


ISOMETRIC VIEW

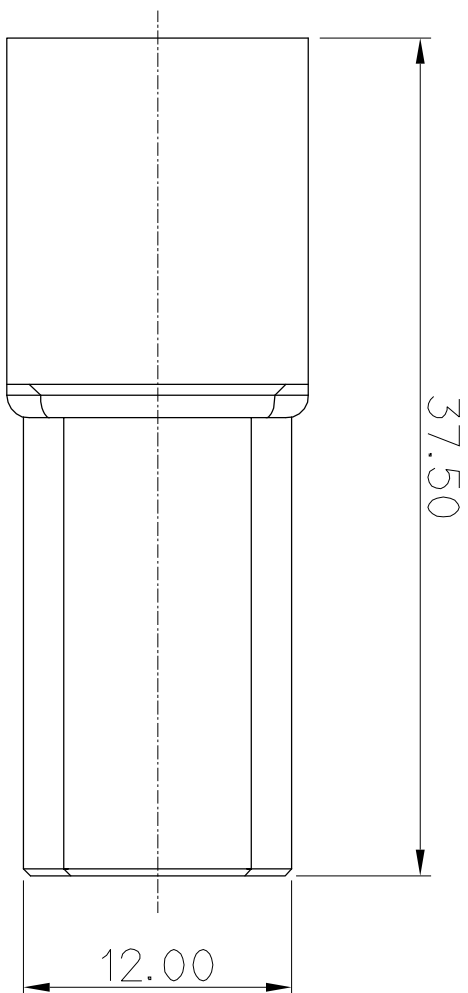

## NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.
3. APPLICABLE R/HOLDER : MG612006T
4. APPLICABLE TERMINAL : ST740370, ST740399

## 주 7 |

- |                                                                                                |
|------------------------------------------------------------------------------------------------|
| 1. 기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.                                                           |
| 2. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다. |
| 3. 적용 HS'G : MG612006T                                                                         |
| 4. 적용 TERMINAL: ST740370, ST740399                                                             |

| GENERAL TOLERANCE (TERMINAL) |       |       |       |        | USED ON |
|------------------------------|-------|-------|-------|--------|---------|
| 10MAX                        | 20MAX | 45MAX | ANGLE | ECCENT |         |
| ±0.2                         | ±0.25 | ±0.3  | ±30'  | 0.1    |         |

|     |                       |      |      |                |            |                                 |                                                                                                                             |
|-----|-----------------------|------|------|----------------|------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
|     |                       |      |      |                | MATERIAL   | PET+PC (GWIT)                   | <br>KOREA ELECTRIC<br>TERMINAL CO., LTD. |
|     |                       |      |      |                | FINISH     | NATURAL                         |                                                                                                                             |
|     |                       |      |      |                | WIRE RANGE | CLASS                           |                                                                                                                             |
|     |                       |      |      |                | INSULATION | TYPE                            |                                                                                                                             |
|     |                       |      |      |                |            |                                 |                                                                                                                             |
| △   | ECO-1402-1299가 도면 제작됨 | SMG  | KSH  | <del>442</del> | 14.02.14   |                                 |                                                                                                                             |
| LTR | REVISION RECORD       | DR.  | CHK. | APP.           | DATE       | TOLERANCE<br>EXCEPT<br>AS NOTED |                                                                                                                             |
| DR. | SMG. 14.02.13         | CHK. | PSH. | 14.02.13       |            | SEE TABLE                       | SCALE                                                                                                                       |
| CHK | KSH. 14.02.13         | APP. | BACK | 14.02.13       | PART NAME  | 312 2M HS'G                     | PART NO.                                                                                                                    |
|     |                       |      |      |                |            |                                 | MG622007T                                                                                                                   |