



GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.
3. APPLICABLE R/HOLDER : MG613084T
4. APPLICABLE TERMINAL : ST740370, ST740399

1. 기능상 유희한 FLASH, SINK, 미성형 등이 없을 것.
2. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

3. ~~KT0~~ HS'G : MG613084T

4. 적용 TERMINAL: ST740370, ST740399

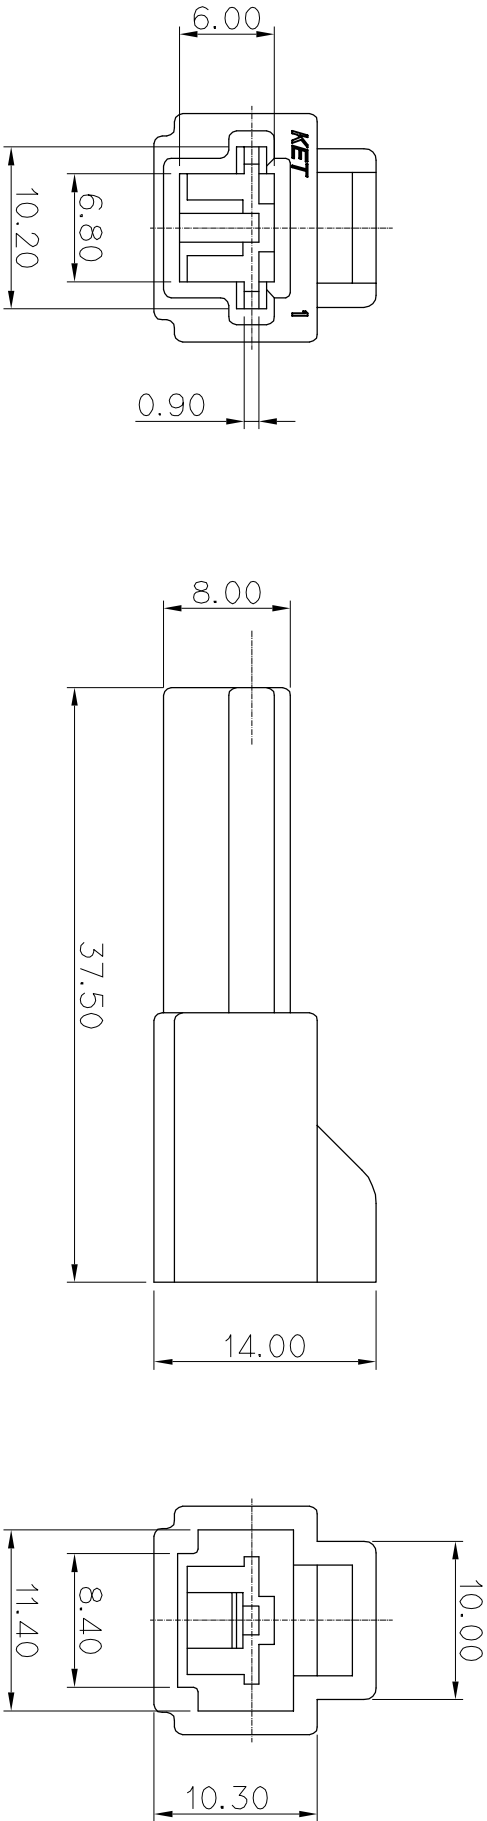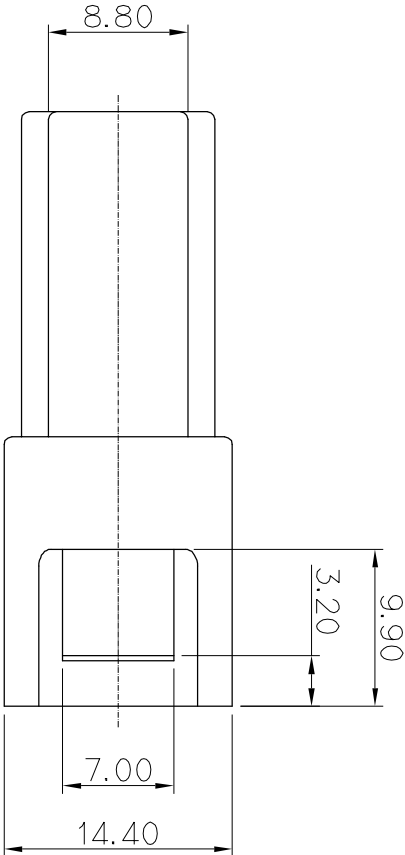

ISSUE MARK

					MATERIAL	PET+PC (GWIT)	 KIEP KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH	NATURAL		
					WIRE RANGE	CLASS		. 전자사업부 전용
					INSULATION	TYPE		. 312
					TOLERANCE EXCEPT AS NOTED	SCALE		PART NO.
△	ECO-1402-1299가 도면 제작임	SMG	KSH	14.02.14	14.02.14			
LTR	REVISION RECORD	DR	CHK	APP.	DATE			
DR.	SMG. 14.02.13				CHK. PSH. 14.02.13			
CHK.	KSH. 14.02.13				APP. BACK* 14.02.13	PART NAME	312 1M HS'G	