
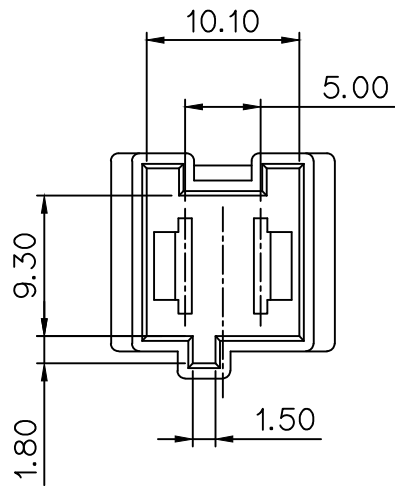
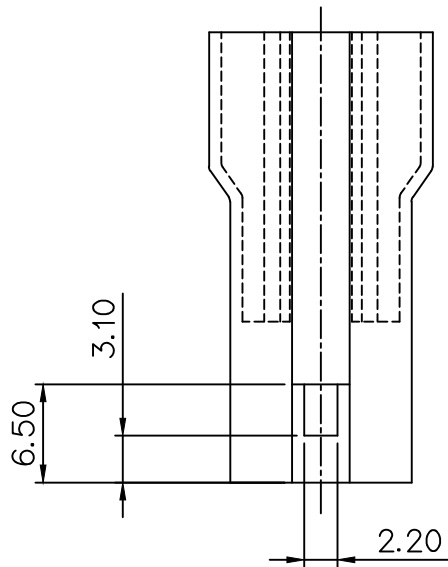
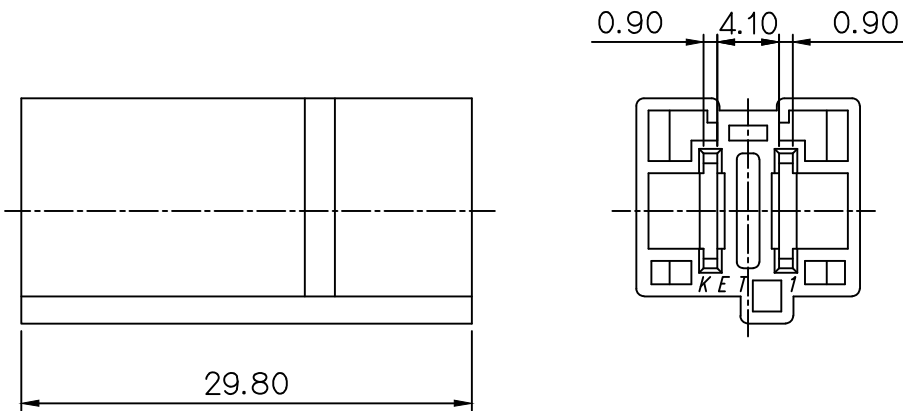


No	FINISH
1	BRASS
2	BRASS/TIN
3	PRE-TIN

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: 740314, 740050, 740439, 740189
- 3.HOUSING 표면 부식사양: KDP-6A
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

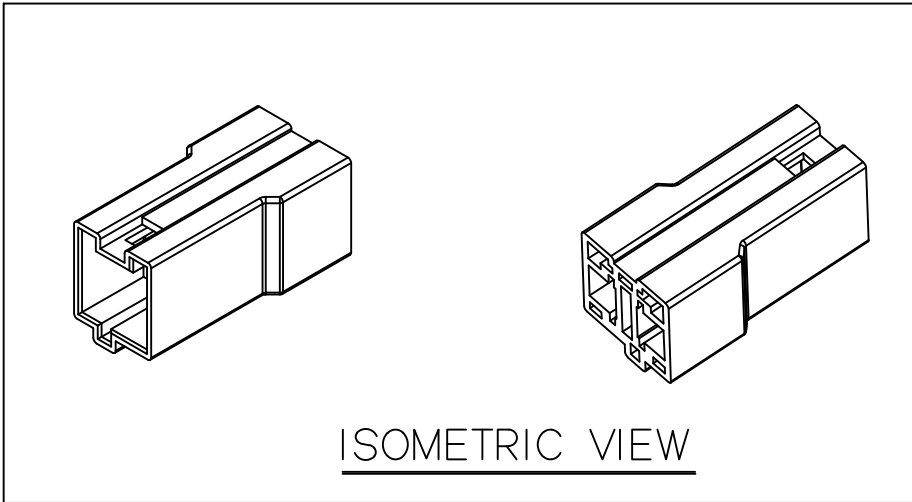

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : 740314, 740050, 740439, 740189
3. HOUSING ETCHING SPEC : KDP-6A
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

						MATERIAL PBT(V0)		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.		
						FINISH SEE TABLE				
						WIRE RANGE		CLASS .250		
						INSULATION		TYPE SAMSUNG		
	설계사양변경(S110128)근거 도면 재작성						'11.04.28			
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG 623798
DR.		JJY '06.09.18		CHK.	HAK 09/18			PART NAME 250 2M HOUSING(PITCH=5mm)		
CHK.				APP.	CBH 09/18					