PART NO. MG624757

CUSTOMER DRAWING

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

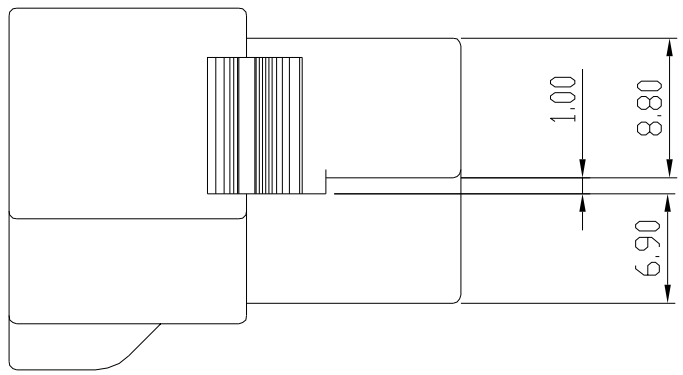

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG614758
   APPLICABLE MALE TERMINAL : ST740253, 740254, 740255
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

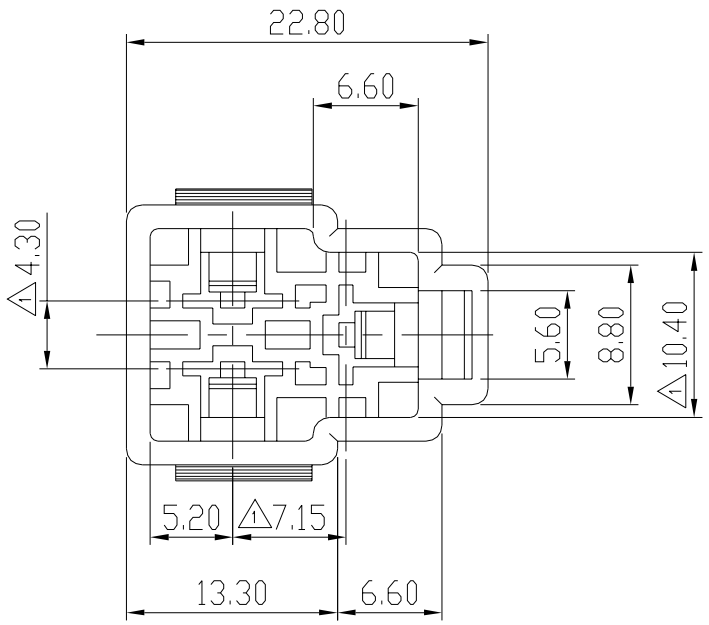

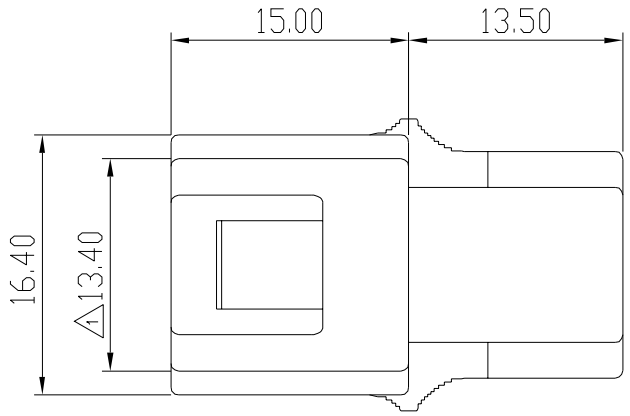

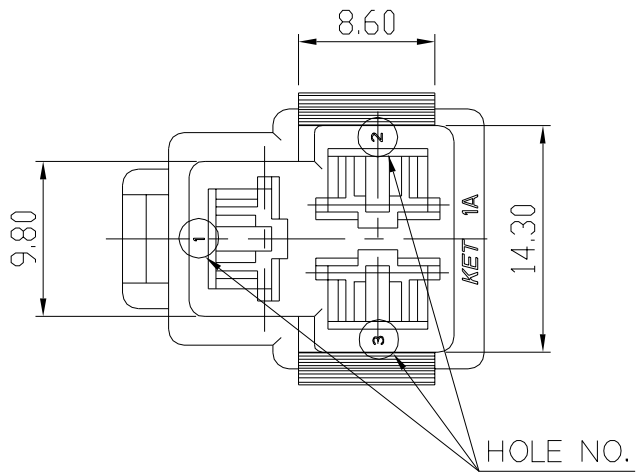

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 HOUSING : MG614758
   적용 MALE TERMINAL : ST740253, 740254, 740255
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE
1	ECO-1504-480 근거 도면 제작성	SMG / KSH		15.04.20

DR.	CJH 2009.05.07	CHK.	5/11
CHK.		APP.	5/11

MATERIAL	NYLON(V0)	KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH	NATURAL		
WIRE RANGE		CLASS	
INSULATION		TYPE	HSG LOCKING
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG624757
PART NAME	250 3M HOUSING		

(DIMENSIONS IN MM)