





GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
3. APPLICABLE R/HOLDER : MG634832
4. APPLICABLE TERMINAL : ST740050

주 기

- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 3.적용 R/HOLDER : MG634832
- 4.적용 TERMINAL: ST740050

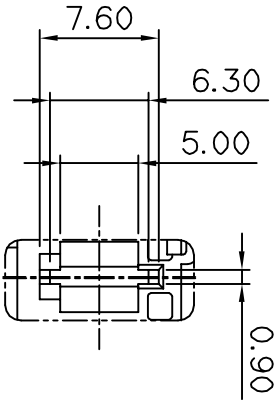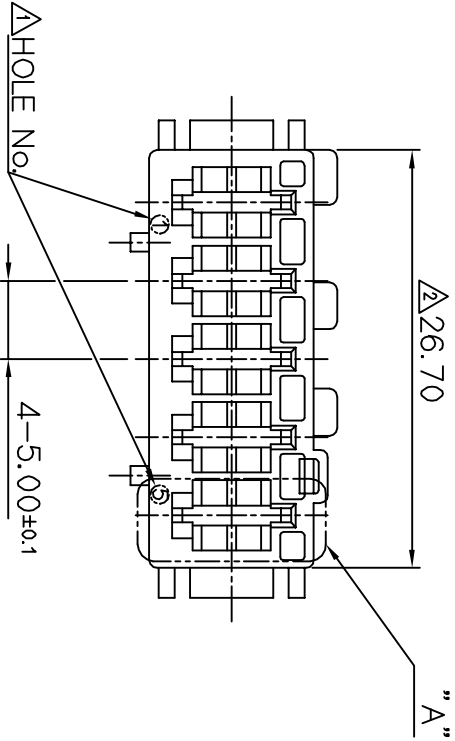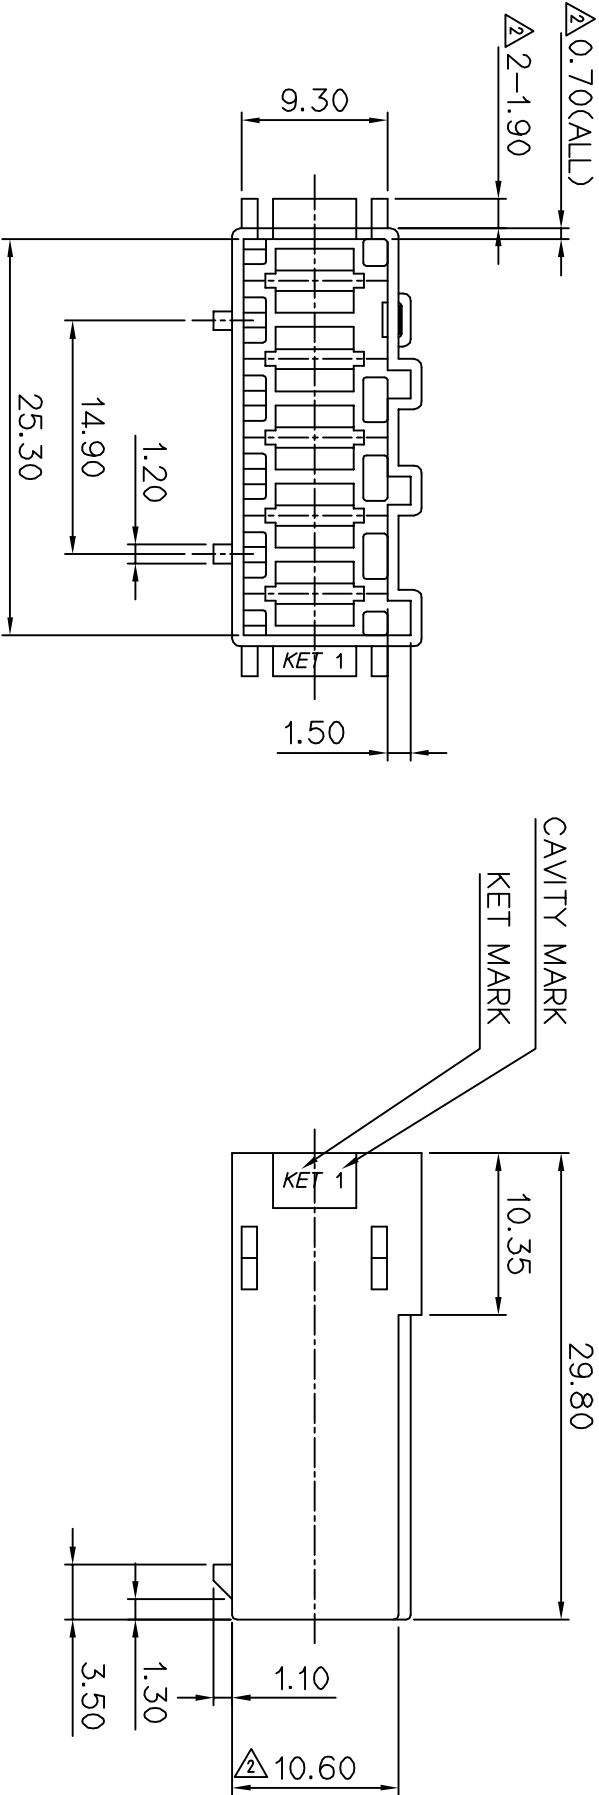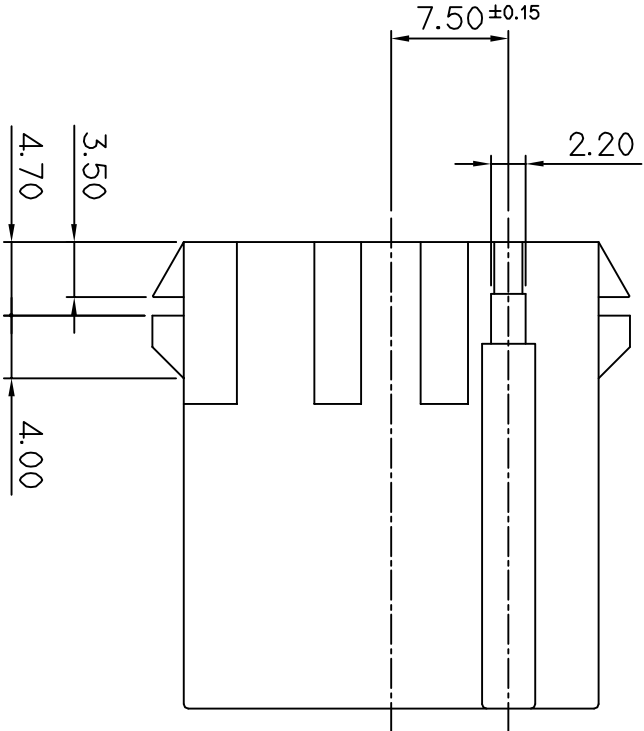

DETAIL "A"

					MATERIAL △△△ PET+PC(GWIT)	
					FINISH NATURAL	
△	ECO-1409-113 크기 도면 제작형	LCM		BUC	'14.09.19	KIEIT KOREA ELECTRIC TERMINAL CO., LTD. [ENGINEERED]
△	삼계(88번경(S100145) 크기 수정		KSH		'10.07.15	
△	삼계(88번경(S100095) 크기 수정				'10.04.22	
LTR	REVISION RECORD	DR	CHK.	APP.	DATE	
DR.	PSH. 09.08.18	CHK.		CJH. 09.08.18	PART NAME	
CHK.	CSH. 09.08.18	APP.		BUC. 09.08.18	250 5M HOUSING	