



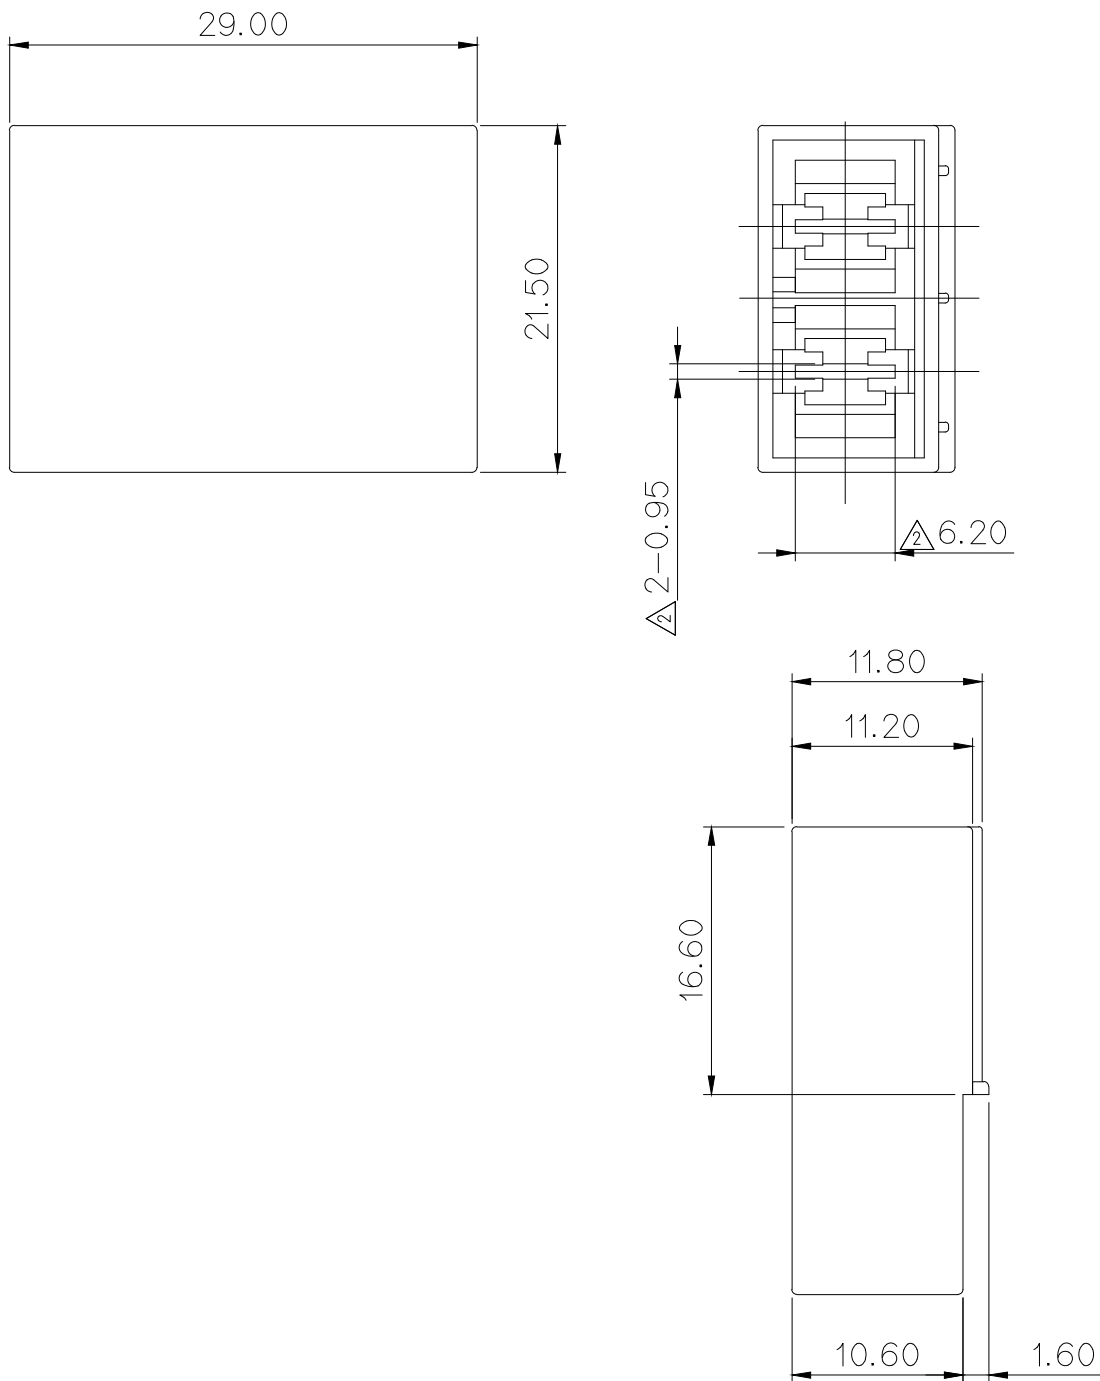


△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740050
APPLICABLE HOUSING : MG634107T, △MG615639-02
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

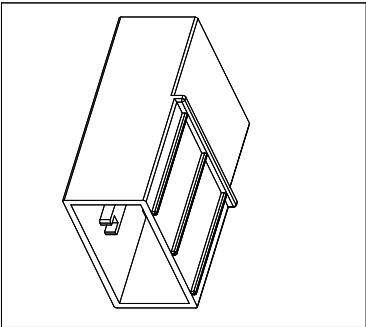

ISO VIEW

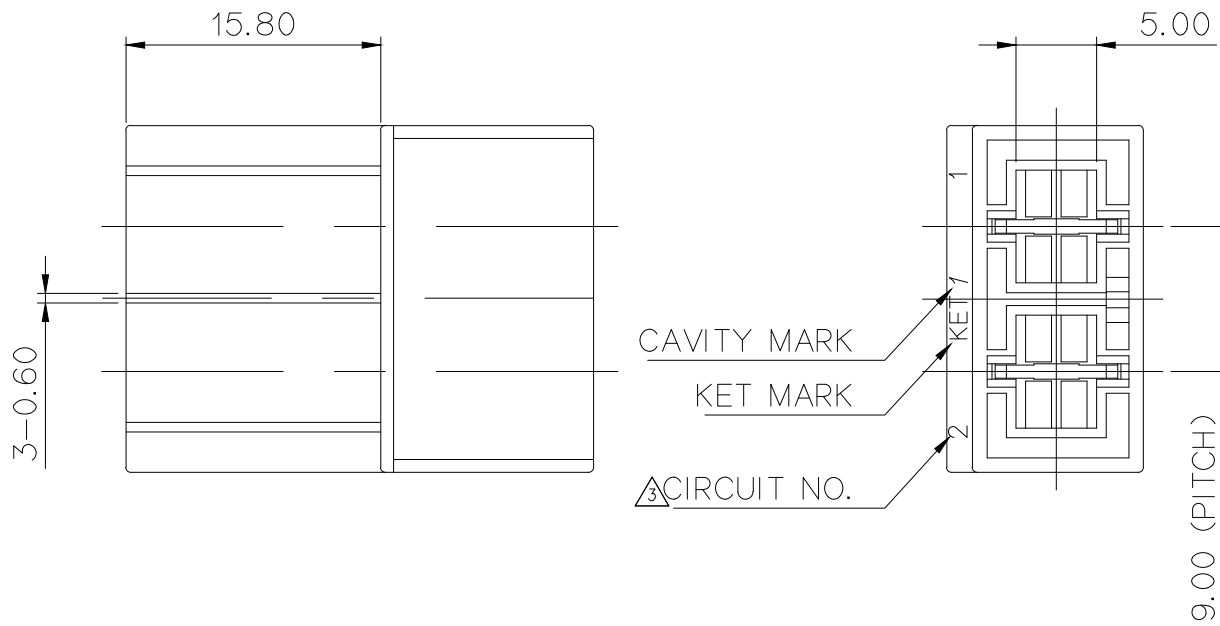

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL: ST740050
적용 HOUSING : MG634107T, △MG615639-02
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH NATURAL			
3	ECO-1903-154 근거 도면 재작성	YHJ	KSH	KHG	'19.03.13	WIRE RANGE			CLASS 250 Series
2	ECO-1811-477 근거 도면 재작성	LCM	KSH	BUC	'18.11.28	INSULATION			TYPE
1	ECO-1709-129 근거 도면 재작성	LCM	KSH	BUC	'17.09.12	TOLERANCE EXCEPT AS NOTED SEE TABLE			SCALE 2/1
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NO. MG625029T		
DR. PSH '16.02.24		CHK. KSH '16.02.24		PART NAME 250 2M HOUSING-GWIT					
CHK.		APP. BUC '16.02.24							